



**Calhoun: The NPS Institutional Archive**  
**DSpace Repository**

---

Theses and Dissertations

1. Thesis and Dissertation Collection, all items

---

1977

An experimental investigation of wall effects  
on supercavitating hydrofoils of finite span.

Maixner, Michael Rex

Massachusetts Institute of Technology

---

<http://hdl.handle.net/10945/18120>

---

*Downloaded from NPS Archive: Calhoun*



Calhoun is the Naval Postgraduate School's public access digital repository for research materials and institutional publications created by the NPS community. Calhoun is named for Professor of Mathematics Guy K. Calhoun, NPS's first appointed -- and published -- scholarly author.

**Dudley Knox Library / Naval Postgraduate School**  
**411 Dyer Road / 1 University Circle**  
**Monterey, California USA 93943**

<http://www.nps.edu/library>

AN EXPERIMENTAL INVESTIGATION OF WALL  
EFFECTS ON SUPERCAVITATING HYDROFOILS  
OF FINIT SPAN

Michael Rex Maixner



AN EXPERIMENTAL INVESTIGATION OF WALL EFFECTS ON  
SUPERCAVITATING HYDROFOILS OF FINITE SPAN

by

MICHAEL REX MAIXNER

//  
B.S., United States Naval Academy  
(1972)

SUBMITTED IN PARTIAL FULFILLMENT  
OF THE REQUIREMENTS FOR THE  
DEGREES OF  
OCEAN ENGINEER  
AND  
MASTER OF SCIENCE IN MECHANICAL ENGINEERING  
at the  
MASSACHUSETTS INSTITUTE OF TECHNOLOGY  
(September 1977)





AN EXPERIMENTAL INVESTIGATION OF WALL EFFECTS ON  
SUPERCAVITATING HYDROFOILS OF FINITE SPAN

by

MICHAEL REX MAIXNER

Submitted to the Department of Ocean Engineering  
on 12 August 1977 in partial fulfillment of the  
requirements for the Degrees of Ocean Engineer and  
Master of Science in Mechanical Engineering.

ABSTRACT

A geometrically similar family of three supercavitating hydrofoils was tested in the M.I.T. variable pressure water tunnel. The half-span foils were of elliptical planform; the ratio of foil half-span to tunnel height was  $1/4$  for the small foil,  $1/2$  for the medium foil, and  $3/4$  for the largest foil. The tunnel was of square cross section. Lift, drag, moment, tunnel speed, ambient pressure, and cavity pressure were measured for attack angles from  $8$  to  $21$  degrees and a variety of ambient pressure settings; cavity length measurements were obtained from photographs. Results were compared with theoretical results obtained by Leehey, and also with a more detailed numerical lifting surface procedure developed by Jiang and Leehey. For the small and medium foils, it was sufficient to correct only for the effect on downwash of the images of the trailing vortices. The large foil data, however, required further correction; upon application of the same corrections which were applied to the data for the two smaller foils, the force and moment data for the large foil plotted slightly lower than did the data for the two smaller foils, while the cavity length data for the large foil indicated cavity lengths significantly larger than for either of the theoretical predictions or the cavity length data for the two smaller foils. Through the application of existing two-dimensional corrections, the force data for the large foil were brought into close agreement with the force data for the two smaller foils, but no suitable correction factors exist for the cavity length data.

Thesis Supervisor: Patrick Leehey, Ph.D.

Title: Professor of Naval Architecture and  
Applied Mechanics



ACKNOWLEDGMENTS

This research was carried out under the Naval Sea Systems Command, General Hydromechanics Research Program, Subproject SR 009 01 01, administered by the David W. Taylor Naval Ship Research and Development Center, Contract Number N00014-76-C-0358. The author is exceedingly grateful to Professor Patrick Leehey of the Department of Ocean Engineering at the Massachusetts Institute of Technology for his inspiration, suggestions, and guidance. Special thanks are also due to S. Dean Lewis and C. W. Jiang, also from M.I.T., who rendered valuable assistance in the performance of the experiments, and to Miss Cheryl Gibson for typing the various drafts and for enduring countless errors. Finally, the author is indebted to his wife, Gretchen, for her unfailing support and encouragement and for the many sacrifices endured by her during the preparation of this report.



TABLE OF CONTENTS

	<u>Page</u>
TITLE PAGE .....	1
ABSTRACT .....	2
ACKNOWLEDGMENTS .....	3
TABLE OF CONTENTS .....	4
LIST OF FIGURES .....	5
NOMENCLATURE .....	7
INTRODUCTION .....	10
EXPERIMENTAL APPARATUS AND PROCEDURE .....	12
Apparatus .....	12
Procedure .....	14
RESULTS .....	17
Lift .....	18
Drag .....	19
Moment .....	19
Cavity Length .....	20
Cavitation Number .....	21
Influence of Static Pressure Controller .....	23
DISCUSSION .....	26
CONCLUSIONS .....	34
REFERENCES .....	36
APPENDIX I .....	73
APPENDIX II .....	75
APPENDIX III .....	77
APPENDIX IV .....	81



LIST OF FIGURES

<u>Figure</u>		<u>Page</u>
1	M.I.T. Test Facility .....	38
2	Foil Dimensions .....	39
3	Static Pressure Measurement .....	40
4	$C_L/\alpha_T$ vs. $\sigma_C/\alpha_T$ , $\alpha = 8.0^\circ$ .....	41
5	$\alpha = 9.5^\circ$ .....	42
6	$\alpha = 11.0^\circ$ .....	43
7	$\alpha = 12.0^\circ$ .....	44
8	$\alpha = 14.0^\circ$ .....	45
9	$\alpha = 16.0^\circ$ .....	46
10	$\alpha = 18.0^\circ$ .....	47
11	$\alpha = 21.0^\circ$ .....	48
12	$C_D/\alpha_T^2$ vs. $\sigma_C/\alpha_T$ , $\alpha = 8.0^\circ$ .....	49
13	$\alpha = 9.5^\circ$ .....	50
14	$\alpha = 11.0^\circ$ .....	51
15	$\alpha = 12.0^\circ$ .....	52
16	$\alpha = 14.0^\circ$ .....	53
17	$\alpha = 16.0^\circ$ .....	54
18	$\alpha = 18.0^\circ$ .....	55
19	$\alpha = 21.0^\circ$ .....	56
20	$C_M/\alpha_T$ vs. $\sigma_C/\alpha_T$ , $\alpha = 8.0^\circ$ .....	57
21	$\alpha = 9.5^\circ$ .....	58
22	$\alpha = 11.0^\circ$ .....	59





<u>Figure</u>		<u>Page</u>
23	$C_M/\alpha_T$ vs. $\sigma_C/\alpha_T$ , $\alpha = 12.0^\circ$ .....	60
24	$\alpha = 14.0^\circ$ .....	61
25	$\alpha = 16.0^\circ$ .....	62
26	$\alpha = 18.0^\circ$ .....	63
27	$\alpha = 21.0^\circ$ .....	64
28	$\sigma_C/\alpha_T$ vs. $L/c$ , Small Foil .....	65
29	Medium Foil .....	66
30	Large Foil .....	67
31	Comparison of Cavity Lengths .....	68
32	$\sigma_C$ vs. $\sigma_V$ , Small Foil .....	69
33	Medium Foil .....	70
34	Large Foil .....	71
35	Large Foil: Comparison of Cavity Pressure Measurement Techniques .....	72



NOMENCLATURE

a	foil leading edge bevel length; see Fig. 2
A	aspect ratio = $2s^2/S$
c	foil mean chord, measured at centroid position
C	foil root chord
$\delta$	tunnel correction factor for influence of images of trailing vortex system
$C_D$	drag coefficient = $\frac{\text{total drag}}{(1/2)\rho U^2 S} = C_{D_{\text{uncor}}} + \Delta C_{D_i}$
$C_{D_{\text{uncor}}}$	uncorrected drag coefficient, as calculated from the raw experimental data = $\frac{\text{measured drag}}{(1/2)\rho U^2 S}$
$C'_D$	drag coefficient, corrected for blockage; see equation (1)
$\Delta C_{D_i}$	change in induced drag due to effect of images of trailing vortex system
$C_L$	lift coefficient = $\frac{\text{measured lift}}{(1/2)\rho U^2 S}$
$C_{L_{2D}}$	two-dimensional lift coefficient; see equation (II-5)
$C_M$	moment coefficient about the midchord point = $\frac{\text{moment}}{(1/2)\rho U^2 S c}$
H	tunnel height = 51 cm
$\ell(z)$	cavity length as a function of spanwise position; measured from leading edge
L	cavity length at centroid position; measured from midchord
$p_b$	minimum pressure along tunnel wall in vicinity of cavity



$p_C$	measured cavity pressure
$p_\infty$	upstream tunnel static pressure at the spanwise position of the foil centroid
$p_v$	vapor pressure of water
$\tilde{p}$	tunnel static pressure controller setting
$p_{U,D}$	static pressure signal to controller from upstream, downstream tunnel static pressure taps; see Fig. 3
$q_{ij}$	strength of discrete source located in the (i,j)-th element
$q(x,z)$	source strength at (x,z)
$s$	foil half-span
$\Delta s_{ij}$	element length for (i,j)-th element
$S$	planform area of half-span model
$S_o$	tunnel test section cross-sectional area
$t$	thickness of hydrofoil
$u,v$	perturbation velocities in the x,y-directions
$U$	water velocity one meter upstream of dynamometer shaft axis
$V$	maximum water velocity (at point of minimum pressure, $p_b$ ) in vicinity of cavity
$x_\lambda(z)$	chordwise coordinate of leading edge as a function of spanwise position
$x_T$	distance of cavity pressure tap from midchord
$x,y,z$	foil coordinates; see Fig. 2
$z_C$	distance of centroid of half-span foil model from midspan
$z_T$	distance of cavity pressure tap from midspan



$\alpha$	geometric angle of attack with reference to tunnel side wall; when used in Appendices II and III, $\alpha$ indicates angle of attack in a free stream
$\alpha_T$	"true" angle of attack, as corrected for effects of images of trailing vortices $= \alpha + \Delta\alpha_i$
$\Delta\alpha_i$	change in angle of attack due to effect of images of trailing vortices
$\gamma$	$\arctan (2\alpha/\sigma_c)$
$\gamma_{ij}$	strength of discrete vortex located in (i,j)-th element
$\gamma(x,z)$	vortex strength at (x,z)
$\lambda$	ratio of foil frontal width to tunnel width; see equation (3)
$\lambda_{3D}$	ratio of foil frontal area to tunnel cross-sectional area (without foil); see equation (4)
$\xi, \zeta$	dummy variables in the x,z-directions
$\rho$	density of water
$\sigma_c$	cavitation number based on measured cavity. pressure $= \frac{P_\infty - P_c}{(1/2)\rho U^2}$
$\sigma_v$	cavitation number, based on vapor pressure $= \frac{P_\infty - P_v}{(1/2)\rho U^2}$
$\sigma'$	cavitation number, corrected for blockage; see equations (2) and (5)
$\sigma''$	cavitation number, based on $p_b$ , $p_c$ , and V, the maximum water velocity $= \frac{p_b - p_c}{(1/2)\rho V^2}$





## INTRODUCTION

Corrections for water tunnel wall effects during the testing of subcavitating hydrofoils are essentially the same corrections developed fifty years ago for use in wind tunnel testing of airfoils; references [1] and [2] are standard texts in this area. Only within the last twenty years have wall effects been considered in the case of supercavitating hydrofoils, with the majority of theoretical and experimental work concentrated on two-dimensional hydrofoils. The problem of blockage can be significant; the shape of the foil and cavity combination must be known in order to apply a blockage correction of the type utilized in subcavitating flow. Unfortunately, this proves to be an area of great difficulty in the various theories. Corrections to drag coefficient and cavitation number for the two-dimensional pure-drag case are given in references [3] through [7]; a nonlinear theoretical model of the two-dimensional lifting problem is formulated in reference [6]. In reference [8], Baker converts this model into a computer program which numerically calculates the wall effect on two-dimensional hydrofoils of arbitrary shape. It was hoped by Baker that these results would prove adequate for application to flows over high aspect ratio hydrofoils. Prior to the current research, a systematic series of experiments which exhibit



wall effects on a geometrically similar family of hydrofoils had not been carried out in either the two- or three-dimensional case. The purpose of the present research is to make available data on a geometrically similar family of three supercavitating hydrofoils of finite span, and to apply existing two-dimensional corrections in an attempt to bring the data into agreement with three-dimensional, unbounded flow theory.



## EXPERIMENTAL APPARATUS AND PROCEDURE

### Apparatus

The experiments were conducted in the M.I.T. recirculating, variable pressure water tunnel (Fig. 1). The test section is 51 cm square in cross-section, and 147 cm long. Test section velocity was continuously variable between 0 and 9.1 m/sec; a manometer indicated the difference in pressure across a contraction in the tunnel one meter upstream of the dynamometer axis. This manometer had been previously calibrated using a pitot tube in the test section. The assumption was made that the blockage caused by the foil and cavity combination did not affect the manometer appreciably. Test section static pressure was variable between 60 mm Hg absolute and atmospheric pressure; static pressure readings were taken using a mercury manometer connected to either or both of two taps on the centerline of a side wall of the test section. These taps were located 62 cm upstream and downstream of the hydrofoil dynamometer, which was located at the center of the test section.

Foil dimensions are given in Fig. 2. The three half-span, aspect ratio five foils had sharp leading edges. Geometrically similar elliptical planforms were chosen even though foils of this type were more difficult to fabricate than, for example, foils of rectangular planform; elliptical



planform foils exhibit less tip loading effect than do rectangular planform foils, thereby rendering them more amenable to analysis. Each foil was drilled with a hole terminating in a pressure tap on the cavity side of the foil. The medium-sized foil was the aspect ratio five foil utilized by Leehey and Stellingner [9], except that the cavity pressure tap was relocated to a position nearer the tip. The composition of the medium foil was of type 304 stainless steel, while that of the small and large foils was of type 614 aluminum bronze. Each foil was welded to its own 10.16 cm diameter mounting plate; the mounting plates, in turn, were bolted to the dynamometer so that the small, medium, and large foils protruded  $1/4$ ,  $1/2$ , and  $3/4$  of the way, respectively, downward from the top window into the test section.

The dynamometer was capable of measuring three moment and three force components, but only the moment about midchord and the forces tangential to and perpendicular to the span and chord were measured. Zero geometrical angle of attack was set by aligning the flat (wetted) side of each foil with the test section side wall. Upon alignment, a sighting telescope, which was attached to the dynamometer, was aligned with a scale on the laboratory wall; this scale, graduated in increments of 0.05 degree, was utilized in setting the geometrical angle of attack.





## Procedure

Before test runs were begun on any one day, the tunnel was operated at medium velocity for twenty minutes at a pressure of 300 mm Hg absolute; this removed almost all of the air trapped in remote locations of the tunnel. Prior to each test run, the bubble chamber shown in Fig. 3 was utilized to collect and draw off any gases or air which may have been trapped in the static pressure sensing line; once cleared of gases, the bubble chamber was merely a reservoir of common pressure. On the other hand, small amounts of air were bled intermittently into the cavity pressure sensing line during testing in order to keep it free of moisture.

Each foil was tested at a variety of attack angles from 8 to 21 degrees. The lower limit of 8 degrees was chosen so that the cavities would not terminate on the foil. For all test runs, the test section velocity was set at 8.5 m/sec, whereupon static pressure was reduced until a cavity covered the entire planform. Readings were taken of lift, drag, moment, static pressure (with pressure taps U and D open; see Fig. 3), cavity pressure, and velocity. A Polaroid photograph was taken of the foil and cavity from the wetted side of the foil, utilizing an exposure time of 1/40 second with bottom flood lighting. Pressure tap D was then closed, and the same reading taken; reopening pressure tap D and closing pressure tap U, the same series of readings was repeated once more. (Photographs were not



taken for these last two pressure tap combinations since hardly any variation in cavity shape or length was noted when compared to the situation where both pressure taps were open.) This completed the measurement of three data points at one controller setting. Both pressure taps were then opened, and the static pressure was reduced by 20 to 30 mm Hg, whereupon the above procedure was repeated. The static pressure was reduced in this fashion until an excessive number of recirculated cavitation bubbles resulted in either extremely poor conditions for photography or rapidly fluctuating instrument readings. Prior to and immediately following a run of this type, the room and water temperatures were recorded, as were the tares on the instrumentation.

A computer program was utilized in the data reduction. Wetted surface frictional drag (for each foil and its mounting plate) and dynamometer shaft twist were taken into account, and test section static pressure readings were modified for static head difference to give the static pressure at the vertical position of the foil centroid. (Gravity effects were otherwise neglected.) Cavitation number was computed using measured cavity pressure, and also by using vapor pressure at the ambient water temperature (computed using equation (2) on page 151 of reference [10]). Lift, drag, and moment coefficients



were also calculated. Standard wind tunnel corrections (as described in Appendix I) were applied to the data to account for the effect of the images of the trailing vortices; this resulted in an increase in drag coefficient and also in an increase in effective angle of attack. Utilizing the photographs, cavity lengths were measured from the midchord at the centroid position.



## RESULTS

Experimental results were compared with predictions from Leehey's linearized theory [11], which utilizes the method of matched asymptotic expansions; the theory is valid to first order in angle of attack, and to second order in the reciprocal of aspect ratio. Comparisons were also made with a more detailed linear lifting surface calculation developed by Jiang and Leehey [12]. This numerical theory is expected to be more accurate at the lower values of  $\sigma_c/\alpha_T$ , where the cavity length is the same size as the foil span or longer; it should also be more accurate, in general, for prediction of moment coefficients. Synopses of the theories developed in references [11] and [12] are given in Appendices II and III, respectively; the experimental data are given in Appendix IV, both in raw form and with standard wind tunnel corrections (Appendix I) applied.

The wall boundary layer momentum thickness was approximately 1.9 mm, as inferred from measurements by Stellingner under similar conditions [9]. Since less than two percent of the wetted surface area of the small foil was within 1.9 mm of the upper wall, the upper wall boundary layer was assumed to have negligible effect on the force and moment coefficients of all three of the foils tested.





It should be noted that the only correction for wall effect which has been applied to the data in Figs. 4 through 30 is the correction for the effects of the images of the trailing vortices (Appendix I). Also worthy of note is the fact that the supercavitating condition was never achieved for the small foil at an angle of attack of 8 degrees. This fact bears upon the lack of scaling evident in the force and moment data of Figs. 4, 12, and 20 for this foil. This matter will be considered again in the subsequent discussion section.

#### Lift (Figs. 4 through 11)

There was very good agreement, overall, between theoretical predictions and the experimental data. For small values of the similarity parameter  $\sigma_c/\alpha_T$  (i.e., for long cavities), there was much better agreement with the numerical theory than with the asymptotic theory; in this case, the foil and cavity combination no longer has a large aspect ratio. For the higher values of  $\sigma_c/\alpha_T$ , Leehey's theory appears to underpredict, especially at the higher angles of attack. This is in apparent contradiction with Fig. 4 of reference [9]; it should, however, be noted that the data of reference [9] were based on cavitation numbers calculated with vapor pressure rather than with measured cavity pressure. It can be seen from Figs. 32



through 35 of the present work that, when based on measured cavity pressure, the cavitation number will be smaller, so that the above contradiction is only apparent. The small and medium foil data plotted almost on top of one another, whereas the large foil data plotted lower than did the small and medium foil data, especially at attack angles greater than 11 degrees.

#### Drag (Figs. 12 through 19)

When the effects of streamwise foil or flow curvature are negligible, linear theory predicts  $C_D = \alpha_T C_L$ , so that the drag data are plotted as  $C_D/\alpha_T^2$  vs.  $\sigma_C/\alpha_T$ .  $C_D/\alpha_T^2$  plotted somewhat higher than the theoretical predictions except for very long or for very short cavities. As with the lift data, the small and medium foil data plotted together, with the large foil data plotting somewhat below these, the effect becoming more pronounced at the higher angles of attack.

#### Moment (Figs. 20 through 27)

The moment coefficient was taken about the midchord consistent with the right-hand rule. As pointed out by Leehey and Stellingner [9], Leehey's matched asymptotic expansion theory neglects lifting surface corrections (third order in the reciprocal of aspect ratio) for the moment coefficient. It is not surprising, therefore, that



the current experimental data agreed best with the more detailed lifting surface theory of Jiang and Leehey [12]. The load cell utilized for moment measurements on the small foil was of inadequate sensitivity, and consequently, much of the small foil data at the smaller attack angles may be less accurate than the data for the medium and large foils; comparisons must therefore be made between the large and the medium foil data. Once again, the large foil data plotted below that of the medium foil, especially at the larger attack angles.

#### Cavity Length (Figs. 28 through 31)

As mentioned previously, cavity lengths were measured from midchord at the centroid position rather than from the leading edge, since this convention was utilized by Leehey [11]. Cavity length ( $L$ ) was nondimensionalized on the foil mean chord ( $c$ ). The cavity length data for the small and medium foils plotted on top of one another (Figs. 28 and 29); in both cases, the cavity lengths were slightly less than those predicted by theory, but the overall agreement with theory was good. In contrast, there was a marked deviation in the large foil cavity length (Fig. 30) and shape (Fig. 31), especially at the root, where local blockage was the worst. The tip vortices seen in the photographs had no evident effect upon the force or moment coefficients. Neither



Leehey's matched asymptotic expansion theory nor the numerical lifting surface theory developed by Jiang and Leehey accounts for the roll-up effects which produced these isolated trailing vortices in the wake.

Representative photographs of the large, medium, and small foils at the same angle of attack and at approximately the same cavitation number are shown in Fig. 31. The cavity shapes shown were averaged over the exposure time of  $1/40$  second; visual observations showed that the instantaneous cavity shape was highly unsteady. For the small and medium foils, the general outline of the cavity was elliptical, as predicted by theory; the cavity length was undoubtedly reduced toward the tip due to the hydrostatic pressure gradient existing in the tunnel.

#### Cavitation Number (Figs. 32 through 35)

Below a cavitation number of approximately 0.4, there was almost no difference between cavitation number calculated with measured cavity pressure or with vapor pressure. It should be noted that in this region there exists a large variation in cavity length from very short to very long. This indicates that for even short cavities, where ram effects of the re-entrant jet from the cavity end have heretofore been thought to have a pronounced effect on measured cavity pressure, the actual cavity pressure was approximately equal to the vapor pressure of the water.





Above a cavitation number of 0.4, the disparity between  $\sigma_v$  and  $\sigma_c$  increased with increasing cavitation number; the data in this region, however, were only for large angles of attack and small cavity lengths, indicating that there may indeed have been some effect caused by the impinging of the re-entrant jet on the cavity pressure tap.

After the series of basic experiments was completed, ram effects were further investigated on the large foil by Jiang and Leehey, this time utilizing a total head tube for cavity pressure measurement. The L-shaped total head tube protruded downwards into the cavity from the upper tunnel wall so that it was parallel to the foil wetted surface and pointed towards the leading edge and away from the impinging re-entrant jet. Cavity pressure readings were taken with both the standard foil surface pressure tap previously utilized and the total head tube, and vapor pressure was calculated as was done previously; results are shown in Fig. 35. For the larger attack angles and shorter cavities (higher cavitation numbers), use of the total head tube significantly reduced re-entrant jet effects; the result was that cavitation numbers calculated with total head tube data were as much as 5 to 8 percent higher than cavitation numbers calculated with data obtained from the previously used foil surface tap. Although a similar check was not made on the small and medium foils, it can be assumed that the same general trend would occur. It should



be noted, however, that data points in Figs. 32 and 33 exhibit a more pronounced downward "hook" at higher cavitation numbers than do the large foil data (Figs. 34 and 35), a fact which accounts for the noticeable "hooks" in the lift and moment data at the higher angles of attack (see, for example, Figs. 10, 11, 26, and 27). If the total head tube had been utilized throughout the entire series of experiments, these deviations from theory at high attack angles and short cavities would probably have been less.

#### Influence of Static Pressure Controller

As stated earlier, readings were taken for the various combinations of the two static pressure taps; this was done in order to determine the effect of blockage on pressure and velocity at the two different tap positions. It was anticipated that this variation in static pressure tap combination would have no effect on the forces and moments experienced by the foil. Due to the location within the system of the static pressure controller (Fig. 3) (which was inadvertently overlooked), the forces and moments varied significantly when the combination of static pressure taps was changed. The explanation for this is as follows. Before data were taken, both static pressure taps were opened and the controller setting reduced to  $\tilde{p}$ ; the actual static pressure in the tunnel was decreased by the control system



until the combined signal from both taps was  $\tilde{p}$ . When the instrument readings settled out, data were taken. The downstream static pressure tap was then closed, so that the only signal to the controller was  $p_U$ , which was greater than the controller setting,  $\tilde{p}$ . The controller therefore lowered the actual static pressure in the tunnel until  $p_U$  equaled  $\tilde{p}$ . Consequently, the effective cavitation number (as seen by the foil) decreased, causing the cavity to grow. This reduced the effective camber of the foil and cavity combination; this loss of effective camber resulted in a reduction of the force and moment coefficients from their previous values. On the other hand, the measured cavitation number increased slightly due to a small decrease in measured cavity pressure; the presence of the controller prevented the measured static pressure from changing significantly. The opposite effect was observed with the upstream tap open and the downstream tap closed (i.e., an increase in force and moment coefficients, an increase in effective cavitation number, and a slight decrease in measured cavitation number when compared to the case when both pressure taps were open); there were only a few of these data points taken.

Although the desired pressure readings were not obtained in the current experiment (i.e., the actual tunnel static pressure was different for each of the tap combinations), the results do show the significance of the blockage. When



comparing the results obtained with the different tap combinations for the small and medium foils, there was very little change in the plotted data points; the increased blockage in the case of the large foil resulted in significantly different force and moment data. For the sake of clarity, the data for the different tap combinations are shown only for the large foil at an angle of attack of 14 degrees. Unless otherwise specified, further remarks concerning foil data will be for the data obtained with both static pressure taps open.

The general trend of the data agrees with the experimental results obtained by Kermeen (see page 37 of reference [13]); he observed that the longer the cavity in supercavitating flow, the smaller the force coefficients. The same conclusion follows from the theoretical results of Leehey, as may be seen from Fig. 4 of reference [9].

At a later time, the system indicated by the dashed lines in Fig. 3 will be utilized to obtain data on the large foil; the present system would be operated with only tap U open to provide an indication of static pressure at "infinity" to the controller. This configuration will allow pressure measurements to be made without affecting the input signal to the static pressure controller.





## DISCUSSION

For the small and medium foils, it appears to be necessary to correct only for the effects of the images of the trailing vortices in accordance with standard wind tunnel procedure. These corrections to drag coefficient and effective angle of attack brought the data into good agreement with theory; the lift, moment, and cavity length data also agreed well with theoretical predictions. For the most part, the plots for the small and medium foils were very close to each other.

Upon application of the same corrections to the large foil data, good agreement with theory was seen for the force and moment coefficients; they were, however, generally lower than the data for the smaller foils, especially at higher attack angles. The plot of cavity length for the large foil, however, showed substantially longer cavities than predicted by either of the two theoretical models used for comparison. The most pronounced deviations in cavity length occurred for the long cavity (lower  $\sigma_c/\alpha_T$ ) data.

When compared with the data obtained from the two smaller foils, the general trend of the large foil data is in agreement with Baker's predictions for wall effects on two-dimensional supercavitating hydrofoils [8]. Baker makes the point that the wall effect is negligible for tunnel



height-to-foil chord ratios ( $H/c$ ) greater than 10 for cambered foils. Although he makes no such generalizations concerning supercavitating flat plates, (i.e., the case applicable to the current research), it is seen from Figs. 4 through 27 that the effect of blockage on the force and moment coefficients is not exceedingly large. The following line of reasoning explains why the force and moment data for the large foil were somewhat lower than for the two smaller foils. For the three foils at the same cavitation number and at the same angle of attack, the magnitude of the velocity on the cavity wall of all three foils is  $\sigma_c/2$  (from linearized theory); consequently, all three foils have identical pressure coefficients on the cavity. The largest foil experiences significantly more blockage than does either of the smaller foils, so that the velocity on the wetted surface of the large foil is much higher than for either of the smaller foils; the pressure coefficient on the wetted surface of the largest foil is therefore the least of all three foils, resulting in smaller lift, drag, and moment coefficients than for either of the smaller foils. It is interesting to note that this overall effect is contrary to blockage effects experienced in subcavitating water tunnel or wind tunnel testing, where force and moment coefficients are increased.



Baker also questions the sharp increase in wall effect predicted by Wu, Whitney, and Lin [6] for thin symmetric wedges or for small attack angles in the lifting flow case. The results of the present work do not show a marked increase in wall effect on force and moment coefficients at the lower angles of attack, in agreement with Baker.

Conversely, Baker's results indicate that the wall effect on the cavity plus wake can be tremendous. In the current research, this is, in fact, the most significant departure of the large foil data from the theoretical predictions and from the data of the two smaller foils (Figs. 28 through 30).

Several attempts were made to bring the large foil data into closer agreement with the small and medium foil data by using existing two-dimensional blockage corrections. Wu, Whitney, and Brennen [4] derive wall effect corrections for the two-dimensional pure-drag (wedge) case, employing the open-wake and Riabouchinsky models. Wu, Whitney, and Lin [6] consider wall effects in two-dimensional lifting cavity flows, a situation more applicable to the current research; Baker [8] utilizes a computer program to translate this into information which could be readily applied to correct experimental data.



The pure-drag, open-wake model employs corrections to both drag coefficient and cavitation number. The drag coefficient corrected for blockage,  $C_D'$ , can be expressed as

$$C_D' = \left[ \frac{1+\sigma'}{1+\sigma_c} \right] C_D + O(\lambda^2), \quad (1)$$

where  $\sigma'$ , the cavitation number corrected for blockage, is given by

$$\sigma' = \sigma_c - \left[ \frac{1+\sigma_c}{\sigma_c} \right] C_D \lambda + O(\lambda^2), \quad (2)$$

where  $\sigma_c$  is the measured cavitation number,  $C_D$  is the drag coefficient as defined in the nomenclature, and  $\lambda$  is the ratio of foil frontal width to tunnel width, which may be expressed as

$$\lambda = \frac{(\text{mean chord}) \times \sin(\alpha)}{\text{tunnel width}}. \quad (3)$$

For the large foil with  $\lambda$  defined in this fashion,  $\lambda \approx 0.30 \sin(\alpha)$ . Application of the above corrections to the large foil data shifted the data points down and to the left on the plots of  $C_D/\alpha_T^2$  vs.  $\sigma_c/\alpha_T$  (Figs. 12 through 19) but did not bring the data into any closer agreement with the small and medium foil data. When the cavity length data for the





large foil were replotted using the corrected cavitation numbers, the data points in Fig. 30 were moved downward; this downward movement was not sufficient, however, to bring the large foil cavity lengths into agreement with either theory or the small and medium foil data.

Actually, the straightforward application of such a two-dimensional correction to the case of a finite-span wing should overcorrect for blockage, making  $\lambda$  much larger than it should be. Perhaps a better representation of  $\lambda$  for the finite-span case would be

$$\begin{aligned}\lambda_{3D} &= \frac{\text{foil frontal area}}{\text{tunnel cross-sectional area (without foil)}} \\ &= \frac{(\text{foil planform area}) \times \sin(\alpha)}{\text{tunnel cross-sectional area (without foil)}}.\end{aligned}\tag{4}$$

Recalculating the corrections using  $\lambda_{3D}$  in place of  $\lambda$  in equations (1) and (2) would make the corrections even smaller than previously calculated. Since the previous corrections proved to be inadequate, there is no reason to believe that the modified corrections should be any better.

To correct measured cavitation number and measured drag coefficient utilizing the Riabouchinsky model, it is necessary to obtain  $p_b$ , the minimum pressure reading along the wall in the region of the cavity. Equation (1) is again



used to correct the drag coefficient, but now the corrected cavitation number is calculated as

$$\sigma' = (2/3)\sigma_c + (1/3)\sigma'' \quad (5)$$

where  $\sigma''$  is the cavitation number based on  $p_c$ ,  $p_b$ , and maximum velocity,  $V$ , and where  $\sigma_c$  is the cavitation number based on  $p_c$ ,  $p_\infty$ , and upstream velocity,  $U$ . It had originally been hoped that a reasonably close measurement of the minimum pressure could be obtained by using only the downstream tap (tap D in Fig. 3); as was shown earlier, the interaction of the static pressure controller precluded making this measurement accurately. In an attempt to apply the correction based on the Riabouchinsky model, the gross assumption was made that the maximum frontal area of the cavity was approximately the same as the frontal area of the foil; utilizing a continuity argument and the steady-flow Bernoulli equation, the pressure minimum was estimated, thus allowing application of the wall effect correction based on the Riabouchinsky model. Unfortunately, this procedure gave results which were comparable to those obtained using the open-wake model. The failure of both models in the current application should not be surprising since they were designed for two-dimensional, pure-drag cavity flows, and not for three-dimensional, lifting cavity flows.



Whereas the pure-drag wall effect corrections changed both drag coefficient and cavitation number, the results of Baker's computerization of the two-dimensional Wu, Whitney, and Lin [6] lifting case wall effect model are presented in terms of a change to the force coefficients (i.e., drag and lift coefficients in this case), referenced to the uncorrected measured cavitation number,  $\sigma_c$ . Accordingly, Baker's corrections to the lift and drag coefficients are expressed as a percentage difference from the free stream condition. He presents data for only one ratio of tunnel height-to-arclength (i.e., chord length),  $H/c = 4$ . Calculating this ratio using the mean chord of the large foil gives  $H/c \approx 3.33$ ; recalculating  $H/c$  as the ratio of tunnel cross-sectional area to foil area,  $H/c \approx 4.48$  is obtained. It was concluded, therefore, that the  $H/c = 4$  corrections given by Baker should be suitable for correction of the large foil data. Upon application of these additive corrections to both lift and drag data, it was found to bring the large foil data into close agreement with the small and medium foil data.

Because an infinite wake model is utilized in reference [8], Baker's results give no correction for the extremely large cavity lengths recorded for the large foil. His results do show, however, that as blockage increases,



the nondimensional cavity thickness increases. This was borne out nicely when the cavitation characteristics of the three foils utilized in the current research were compared at an angle of attack of 8 degrees. On the small foil, which produced the least blockage, supercavitation was never totally achieved, no matter how low the static pressure was brought. For the medium and large foils, which produced more blockage than did the small foil, cavity termination was achieved behind the foil over a range of static pressures.





### CONCLUSIONS

As a general rule, the agreement of the experimental data with unbounded flow theory was good for the small and medium foils, whose ratios of half-span to tunnel width were  $1/4$  and  $1/2$ , respectively, and whose ratios of tunnel height to mean chord were approximately 10 and 5, respectively. It appeared that in order to bring the small foil and medium foil data into agreement with theory, it was necessary to apply only standard wind tunnel procedures in correcting for the effects of the images of the trailing vortices.

Of the three geometrically similar aspect ratio five foils, the largest foil, which protruded  $3/4$  of the way into the tunnel, and which had a ratio of tunnel height to mean chord of approximately 3.33, had force and moment data which were close to the small and medium foil data, although slightly lower; the cavity length data for the large foil differed greatly from the small and medium foil data, showing much longer cavities for the same ratio of cavitation number to angle of attack. It is evident that blockage corrections are required in addition to the standard wind tunnel downwash corrections.

Application and modification of blockage corrections based on various two-dimensional pure-drag cavity flow models failed to bring the large foil data into agreement with the



data for the two smaller foils. It was found, however, that corrections based on a two-dimensional lifting cavity flow model brought the large foil force coefficient data into much closer agreement with the small and medium foil data. While these force coefficient corrections were found to give an "engineering order of accuracy," no corrections have been found which give adequate corrections to the large foil cavity length data; it is clearly evident that further analytical work is necessary in this area.

It is recommended that for future experiments, a static pressure measuring system similar to that depicted in Fig. 3 be utilized.



REFERENCES

1. Pope, A., and Harper, J.J., Low Speed Wind Tunnel Testing. Wiley, New York, 1969.
2. Pankhurst, R.C., and Holder, D.W., Wind-Tunnel Technique. Sir Isaac Pitman & Sons, Ltd., London, 1965.
3. Whitney, A.K., "A Simple Correction Rule for Wall Effect in Two Dimensional Cavity Flows," Cavitation State of Knowledge, ASME, New York, 1969, p. 138.
4. Wu, T.Y., Whitney, A.K., and Brennen, C., "Cavity-Flow Wall Effects and Correction Rules," Journal of Fluid Mechanics, Vol. 49, Part 2, 1971, p. 223.
5. Wu, T.Y., Whitney, A.K., and Brennen, C., "Wall Effects in Cavity Flows and Their Correction Rules," Non-Steady Flow of Water at High Speeds, Proceedings of the IUTAM Symposium in Leningrad, June 22-26, 1971, Nauka Publishing House, Moscow, 1973, p. 461.
6. Wu, T.Y., Whitney, A.K., and Lin, J.D., "Final Report: Wall Effects in Cavity Flows," Calif. Inst. of Tech. Div. of Eng. & App. Sci. Report No.E-111A.5, 1969.
7. Whitney, A.K., Brennen, C., and Wu, T.Y., "Experimental Verification of Cavity-Flow Wall Effects and Correction Rules," Calif. Inst. of Tech. Div. of Eng. & App. Sci. Report No. E-97A-18, 1970.
8. Baker, E., "Analytical Prediction of Wall Effect on Fully Cavitating Lifting Foils, Using Nonlinear Theory," NSRDC Report 3688, 1972.
9. Leehey, P. and Stellingner, T.S., "Force and Moment Measurements of Supercavitating Hydrofoils of Finite Span with Comparison to Theory," Journal of Fluids Engineering, Vol. 97, No. 4, December 1975, p. 453.
10. Smith, L.B., Keyes, F.G., and Gerry, H.T., "The Vapor Pressure of Water, Part II, Steam Research Program," Proceedings of the American Academy of Arts and Sciences, published by the Society, Boston, Vol. 69, 1934, p. 137.
11. Leehey, P., "Supercavitating Hydrofoil of Finite Span," Non-Steady Flow of Water at High Speeds, Proceedings of the IUTAM Symposium in Leningrad, June 22-26, 1971, Nauka Publishing House, Moscow, 1973, p. 277.



12. Jiang, C.W., and Leehey, P., "A Numerical Method for Determining Forces and Moments on Supercavitating Hydrofoils of Finite Span," Proceedings of the Second International Conference on Numerical Ship Hydrodynamics, September 1977 (to be published).
13. Kermeen, R.W., "Experimental Investigations of Three-Dimensional Effects on Cavitating Hydrofoils," Journal of Ship Research, Vol. 5, No. 2, September 1961, p. 22.






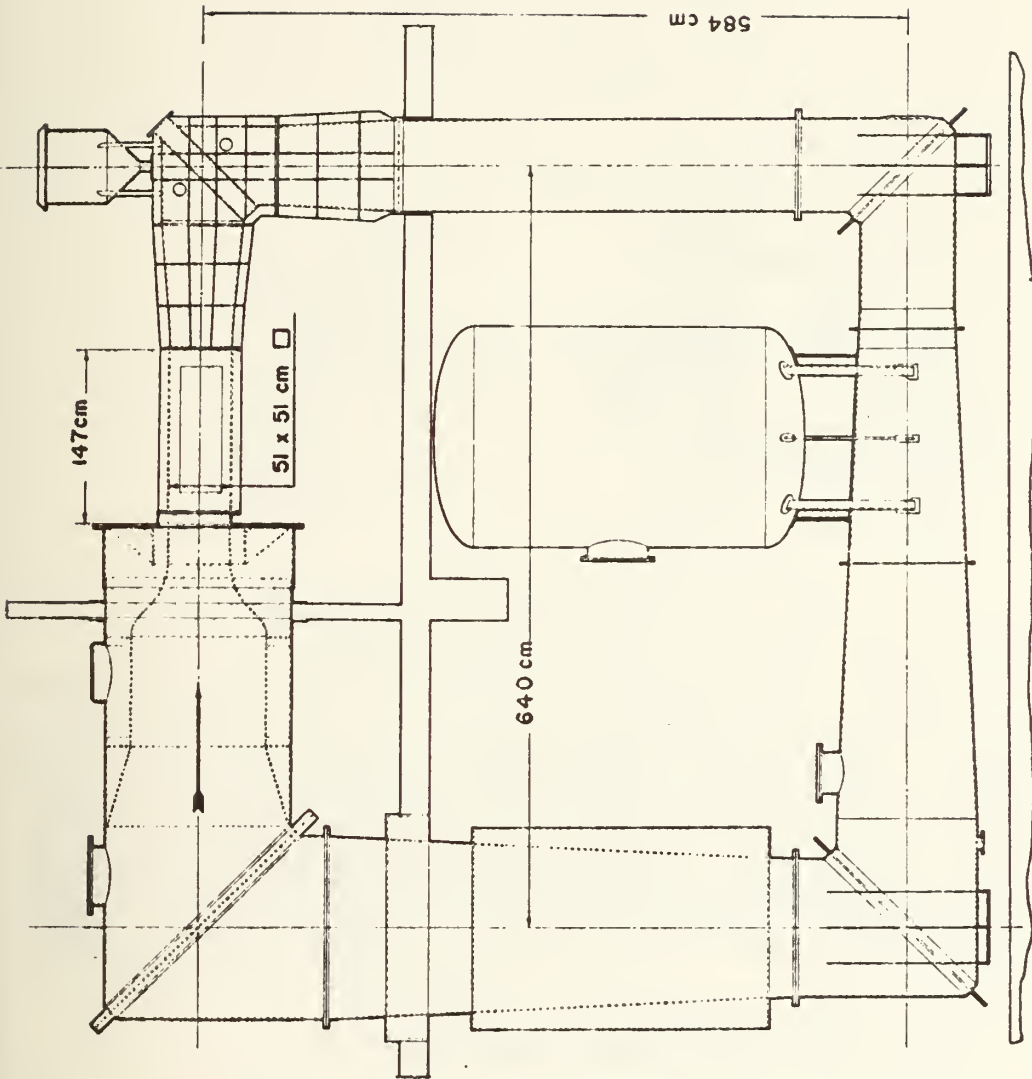


FIG. 1: M.I.T. TEST FACILITY



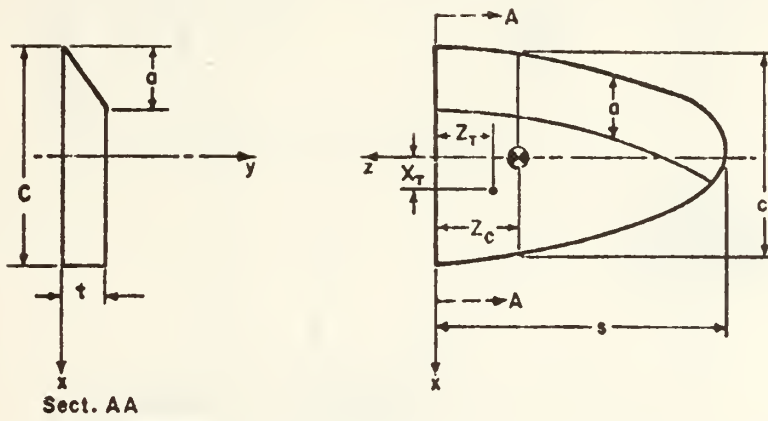

FOIL	C	c	s	a	$S(\text{cm}^2)$	$Z_C$	$Z_T$	$X_T$	t
LARGE	19.50	15.33	38.10	7.65	580.6	16.17	12.55	2.54	1.60
MEDIUM	13.00	10.22	25.40	5.10	258.1	10.78	8.18	3.18	1.20
SMALL	6.50	5.11	12.70	2.55	64.5	5.39	4.67	1.43	.65

FIG. 2: FOIL DIMENSIONS (cm)



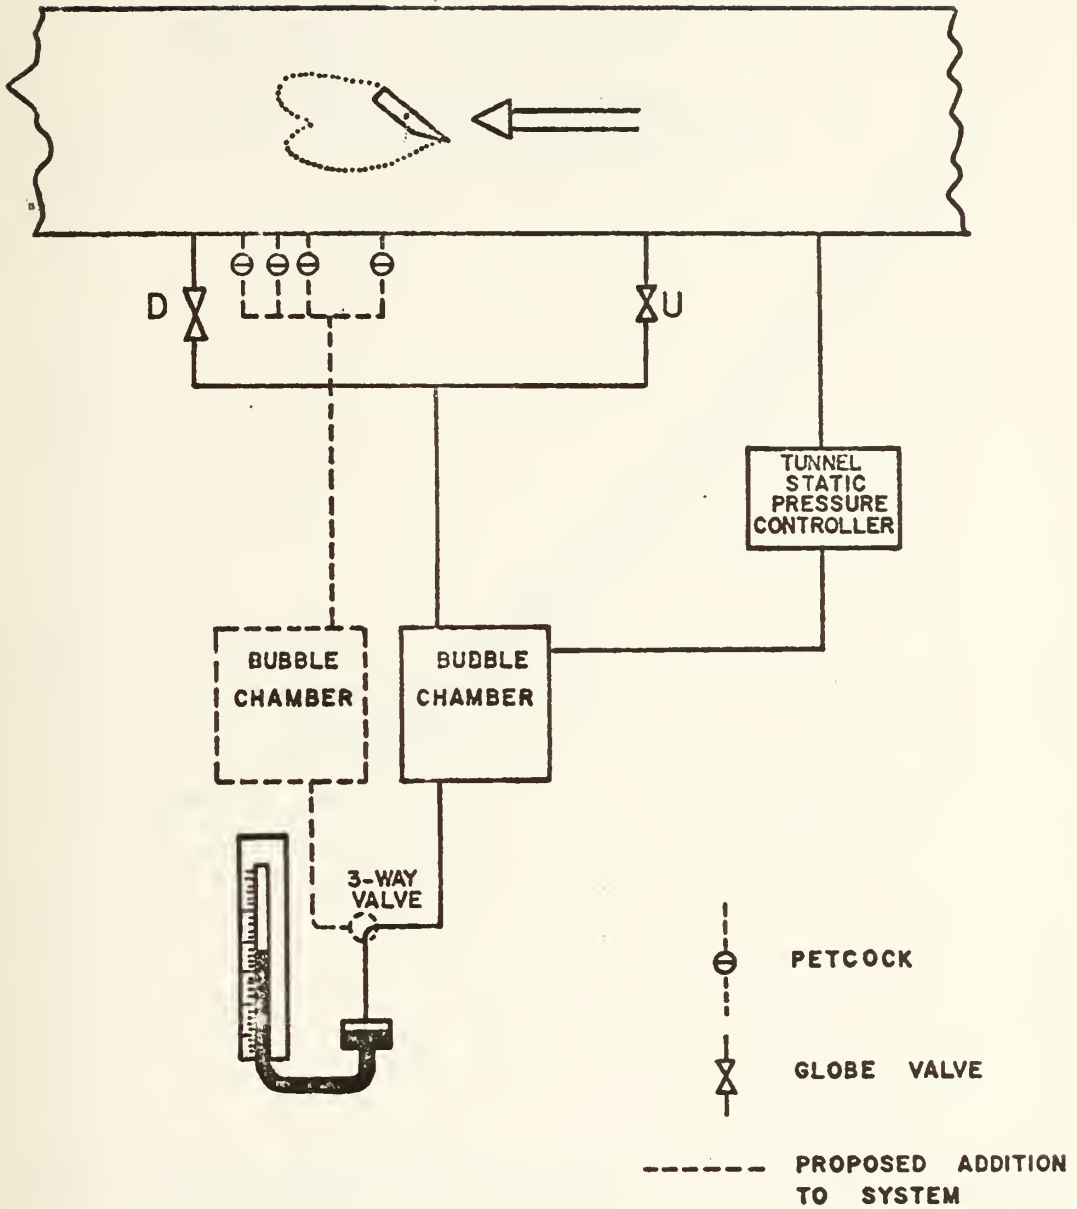


FIG.3 : STATIC PRESSURE MEASUREMENT



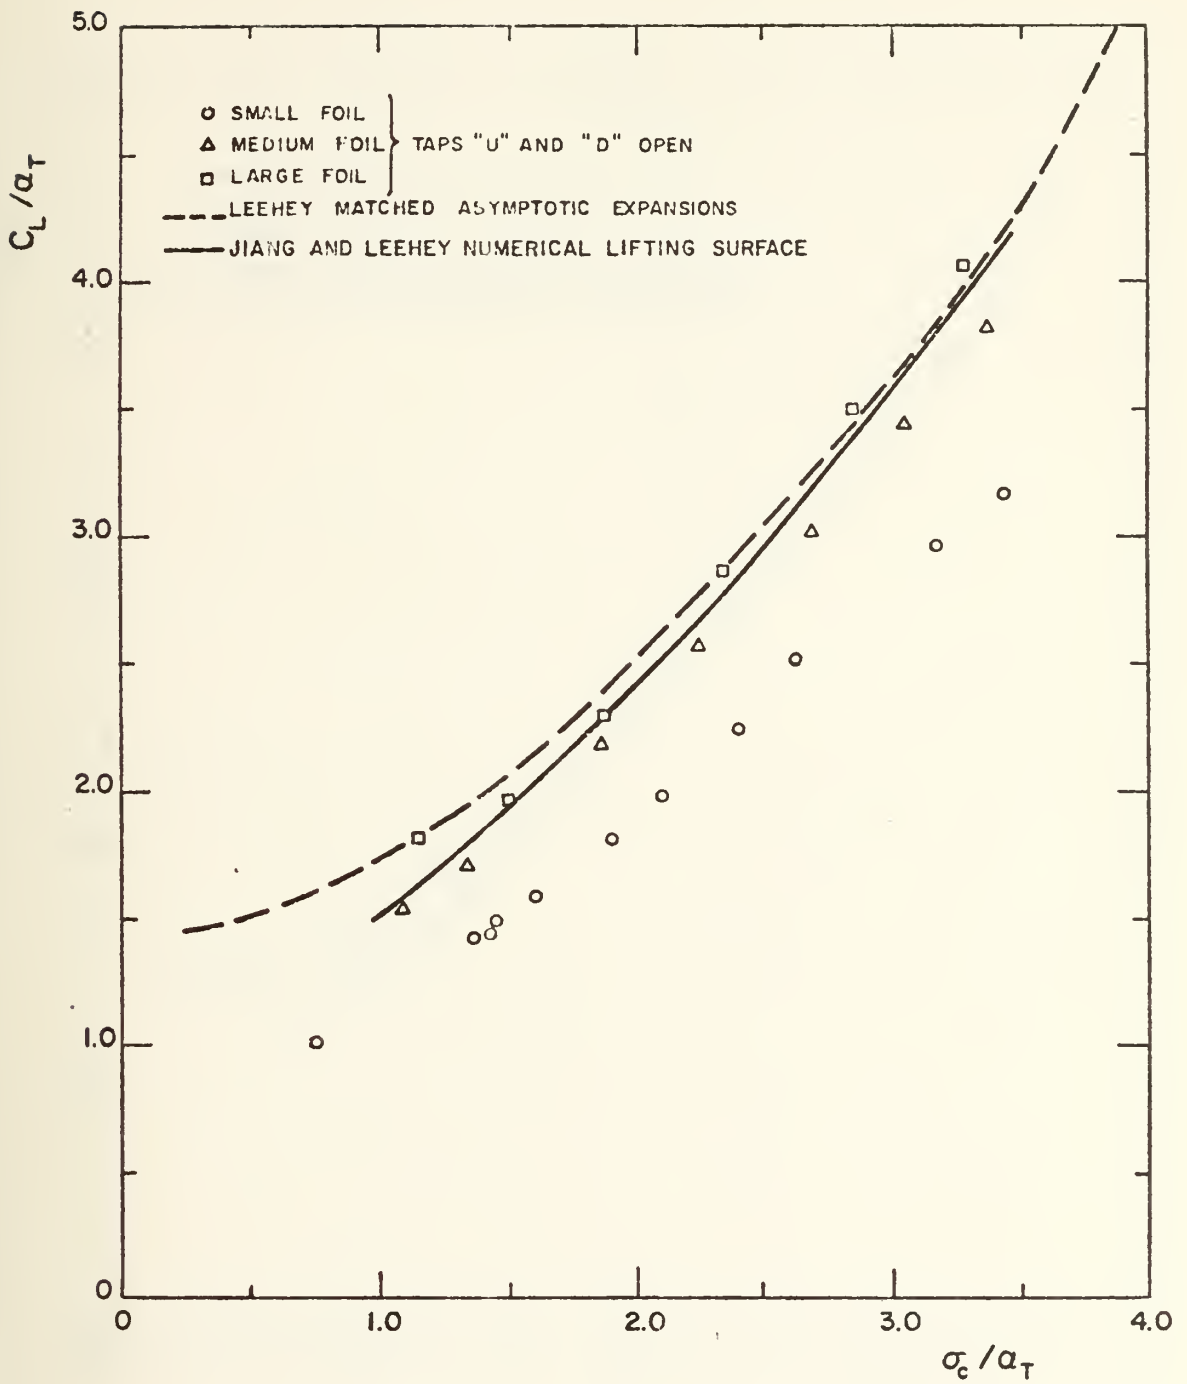


FIG. 4:  $C_L/a_T$  vs  $\sigma_c/a_T$ ,  $\alpha = 8.0^\circ$





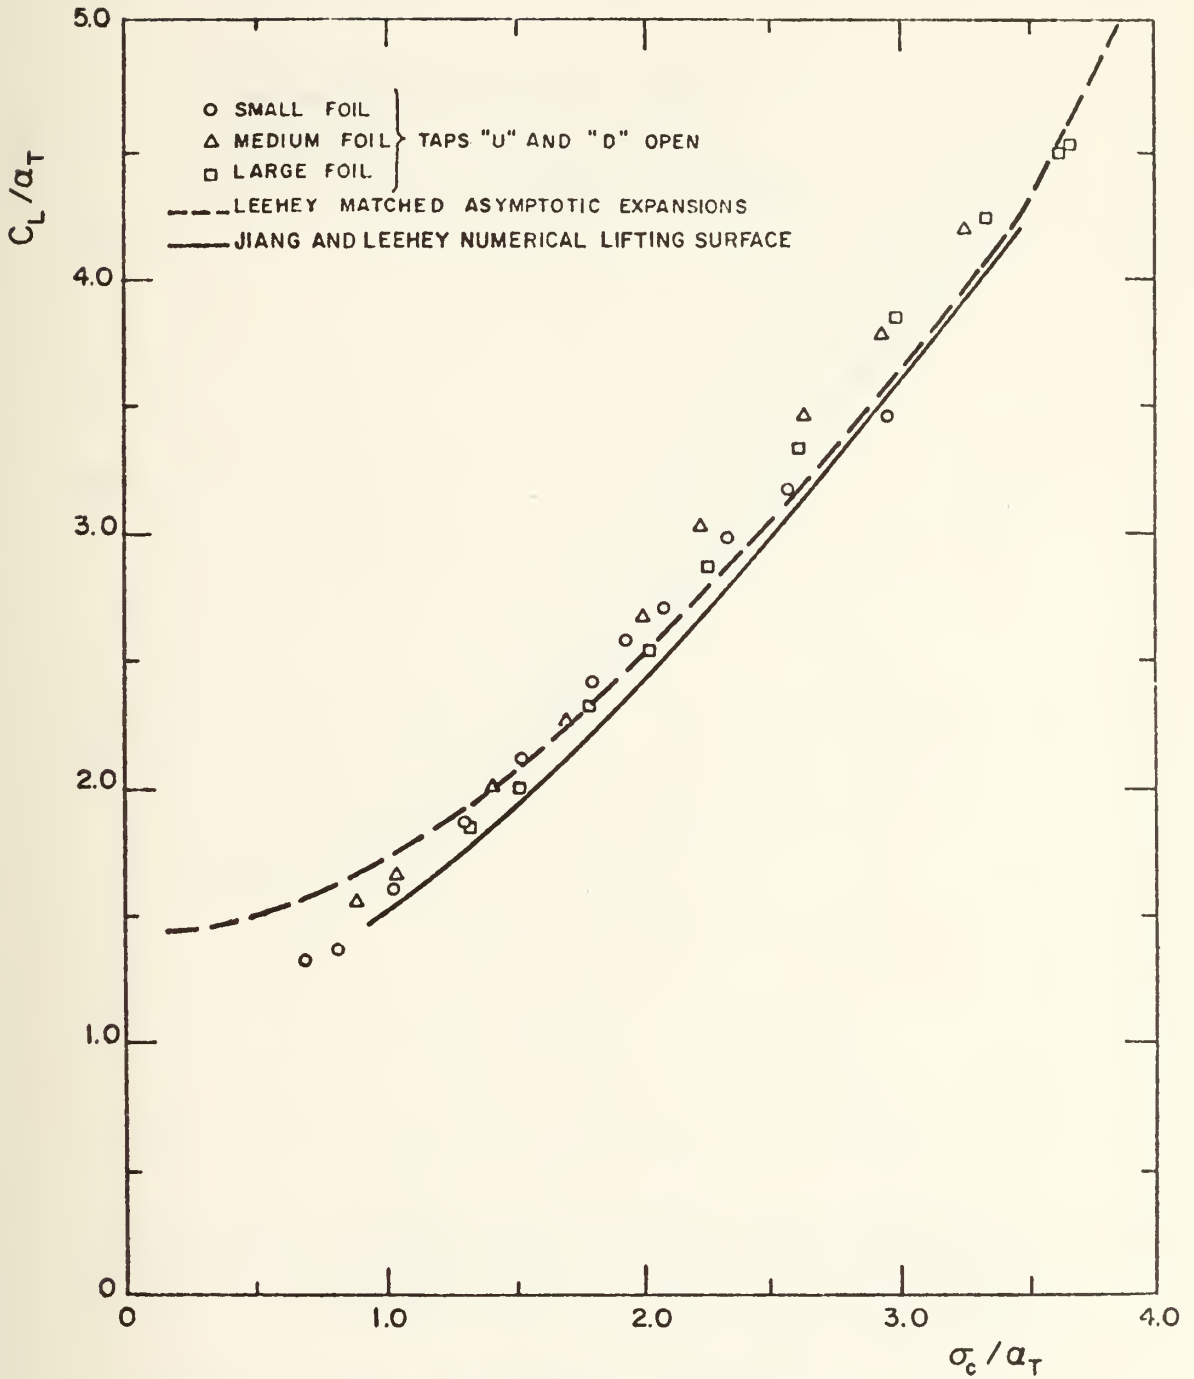


FIG. 5:  $C_L/a_T$  vs  $\sigma_c/a_T$ ,  $\alpha = 9.5^\circ$



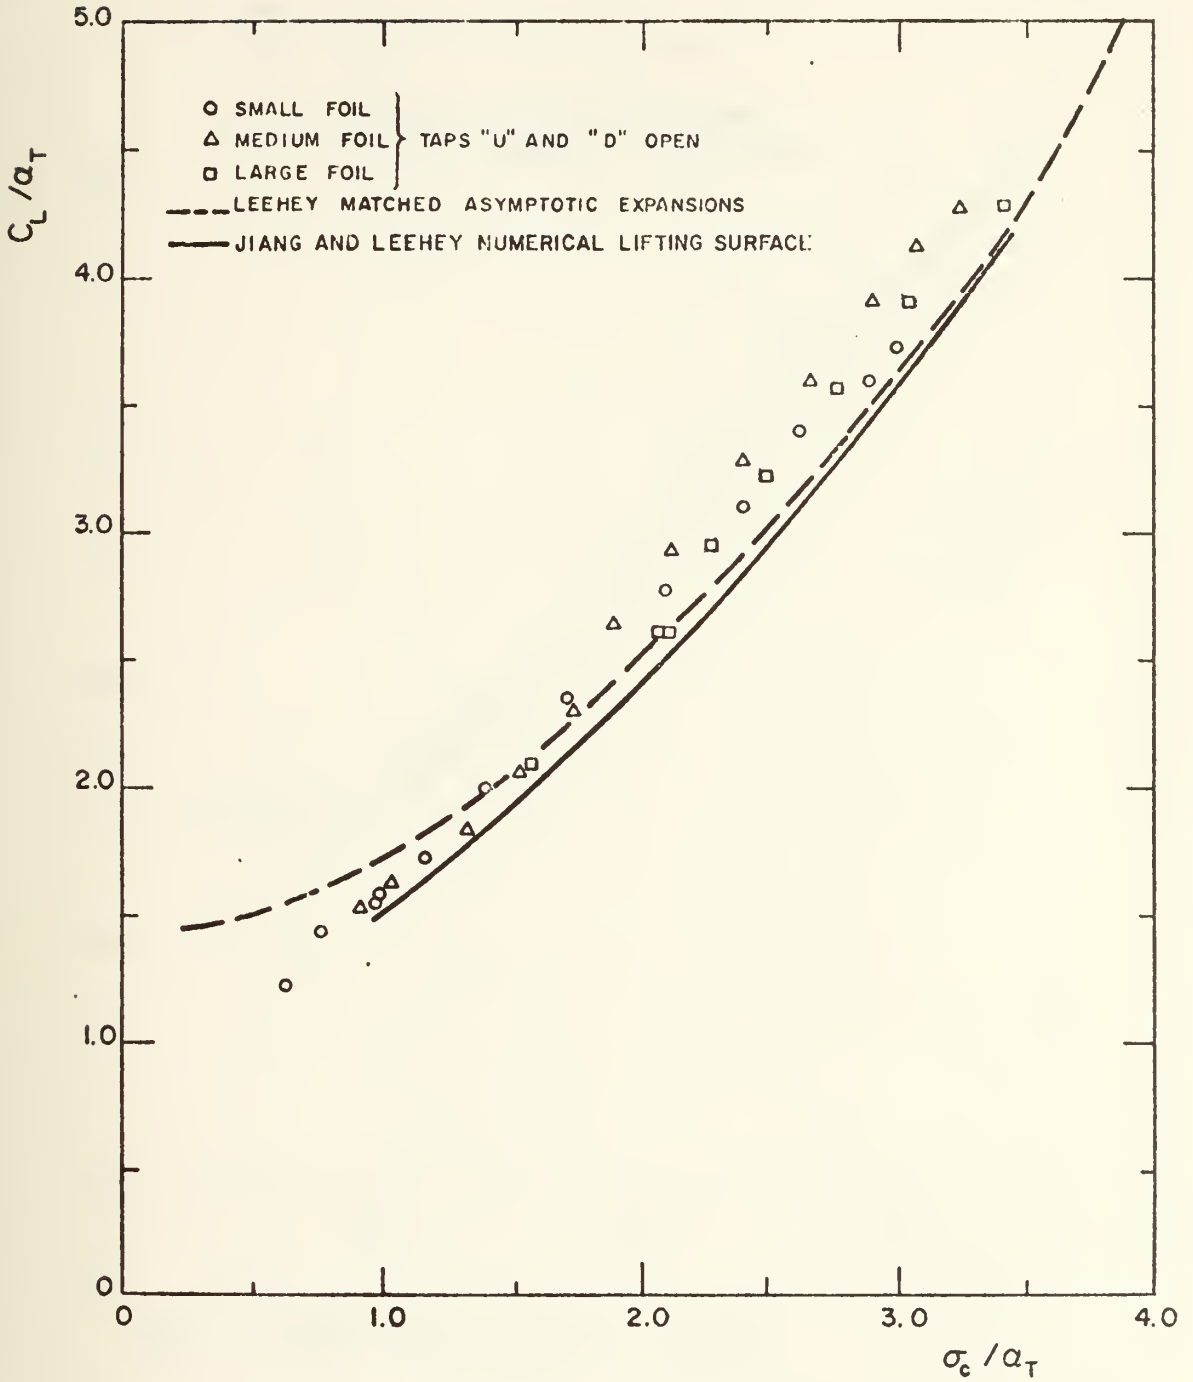


FIG. 6:  $C_L/a_T$  vs  $\sigma_c/a_T$ ,  $\alpha = 11.0^\circ$



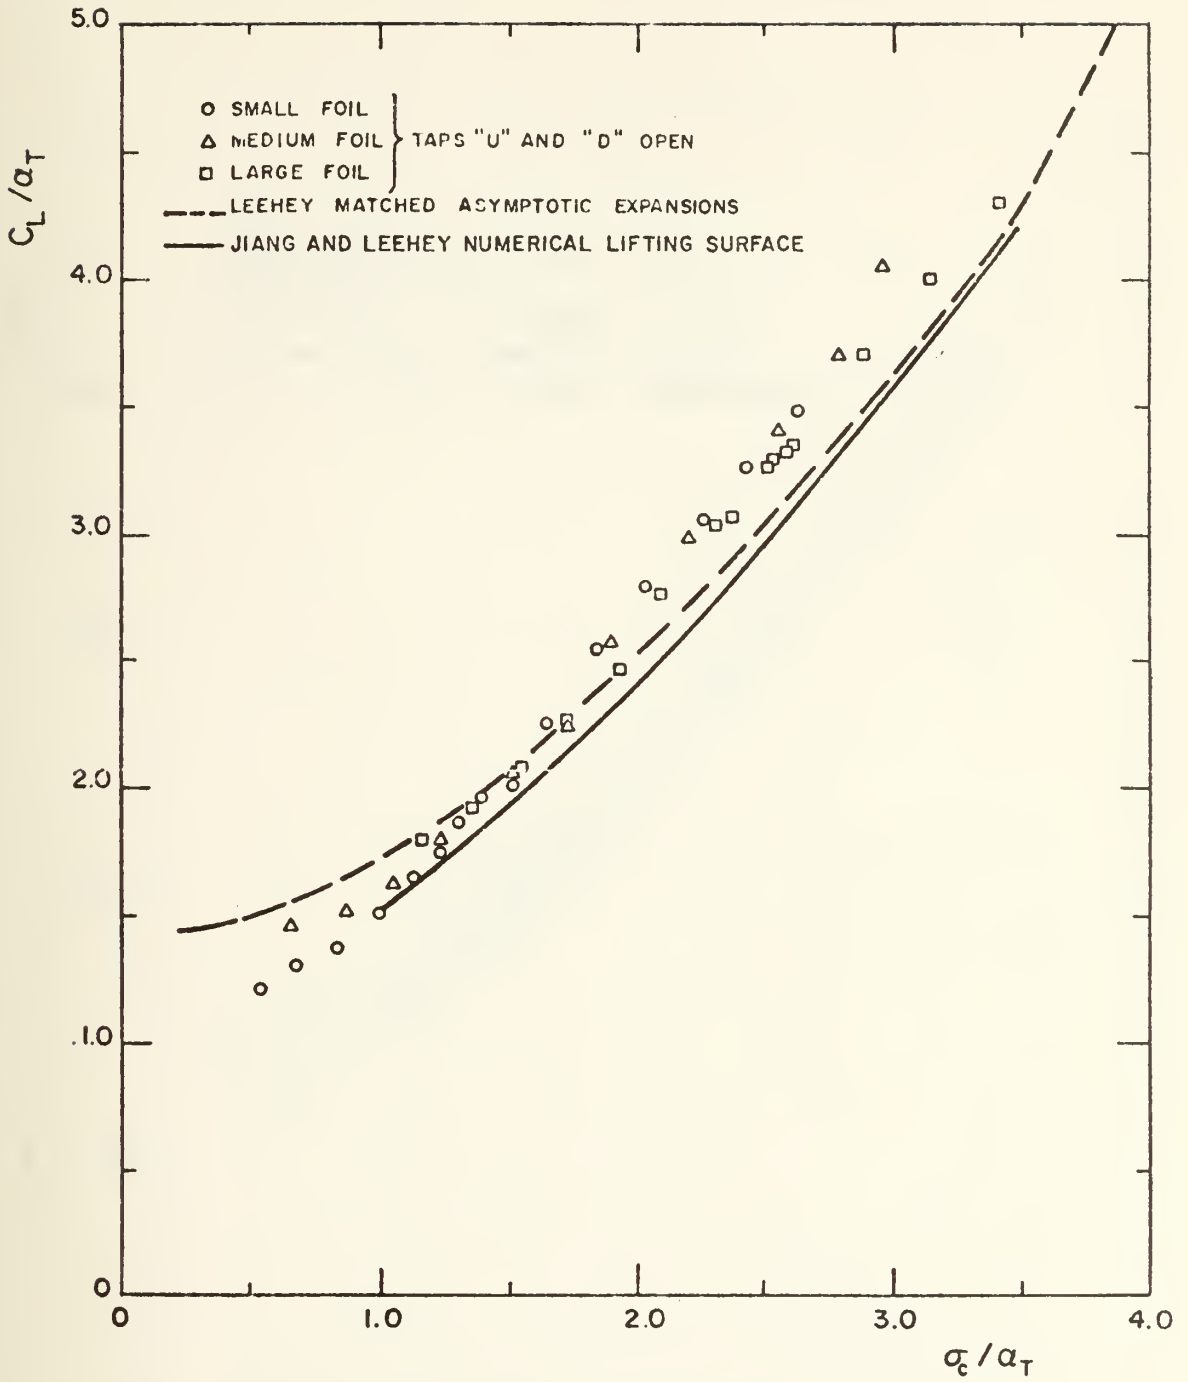


FIG. 7:  $C_L/a_T$  vs  $\sigma_c/a_T$ ,  $\alpha = 12.0^\circ$



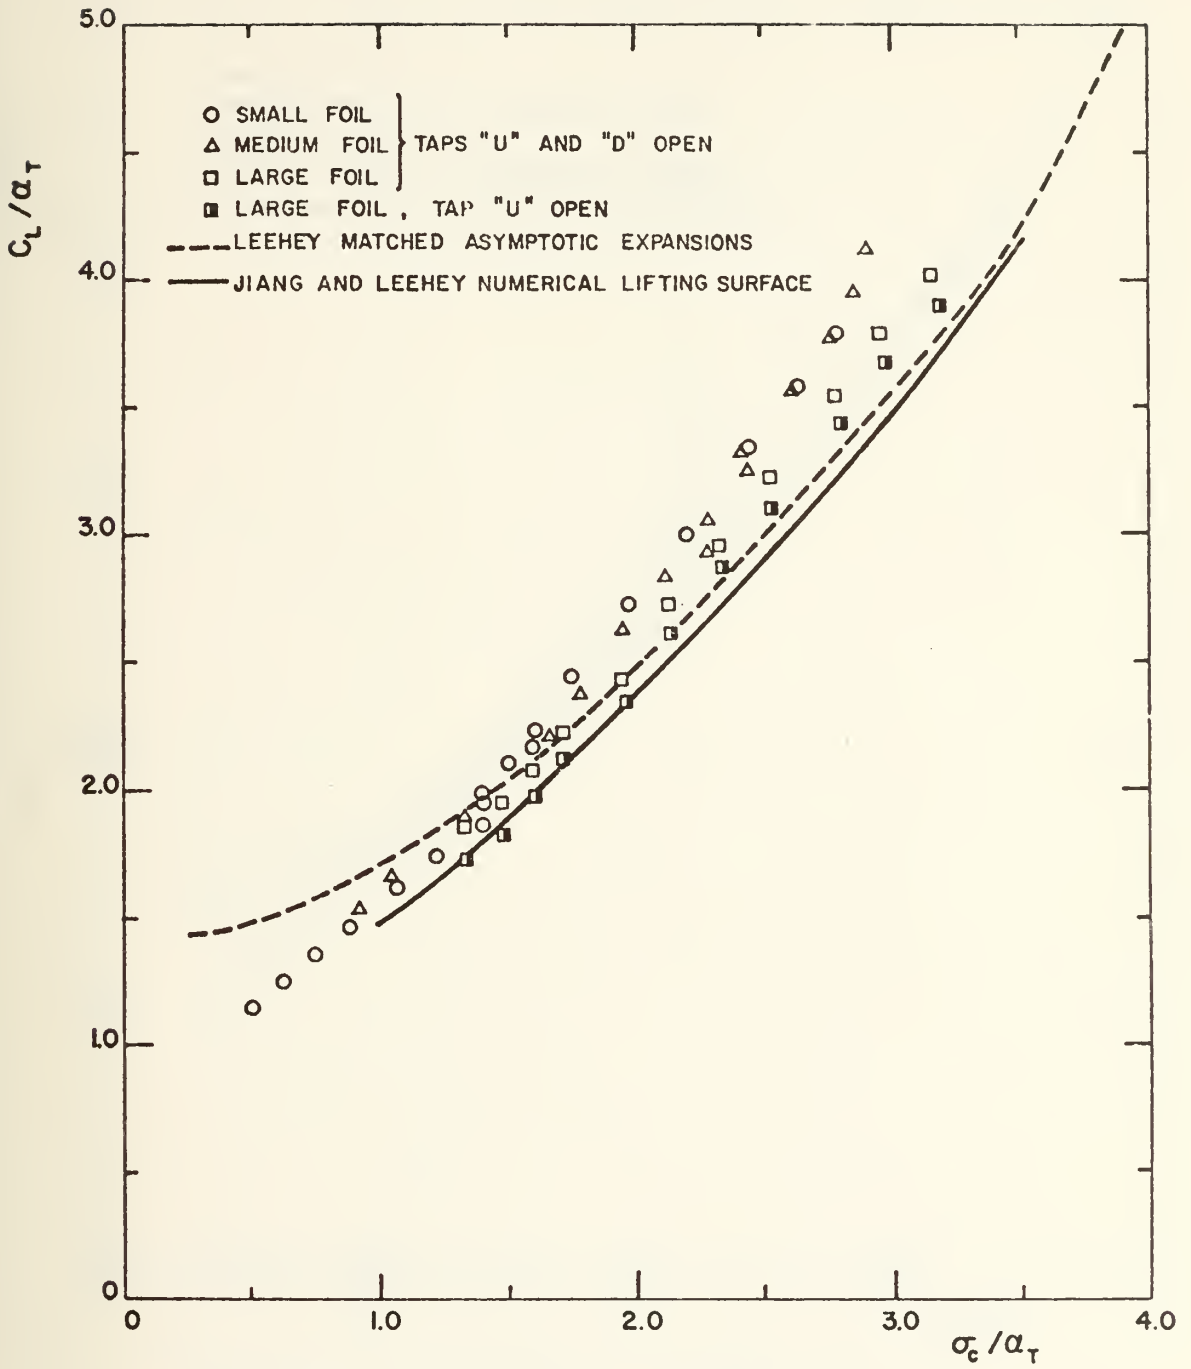


FIG. 8 :  $C_L/a_T$  vs  $\sigma_c/a_T$  ,  $\alpha = 14.0^\circ$





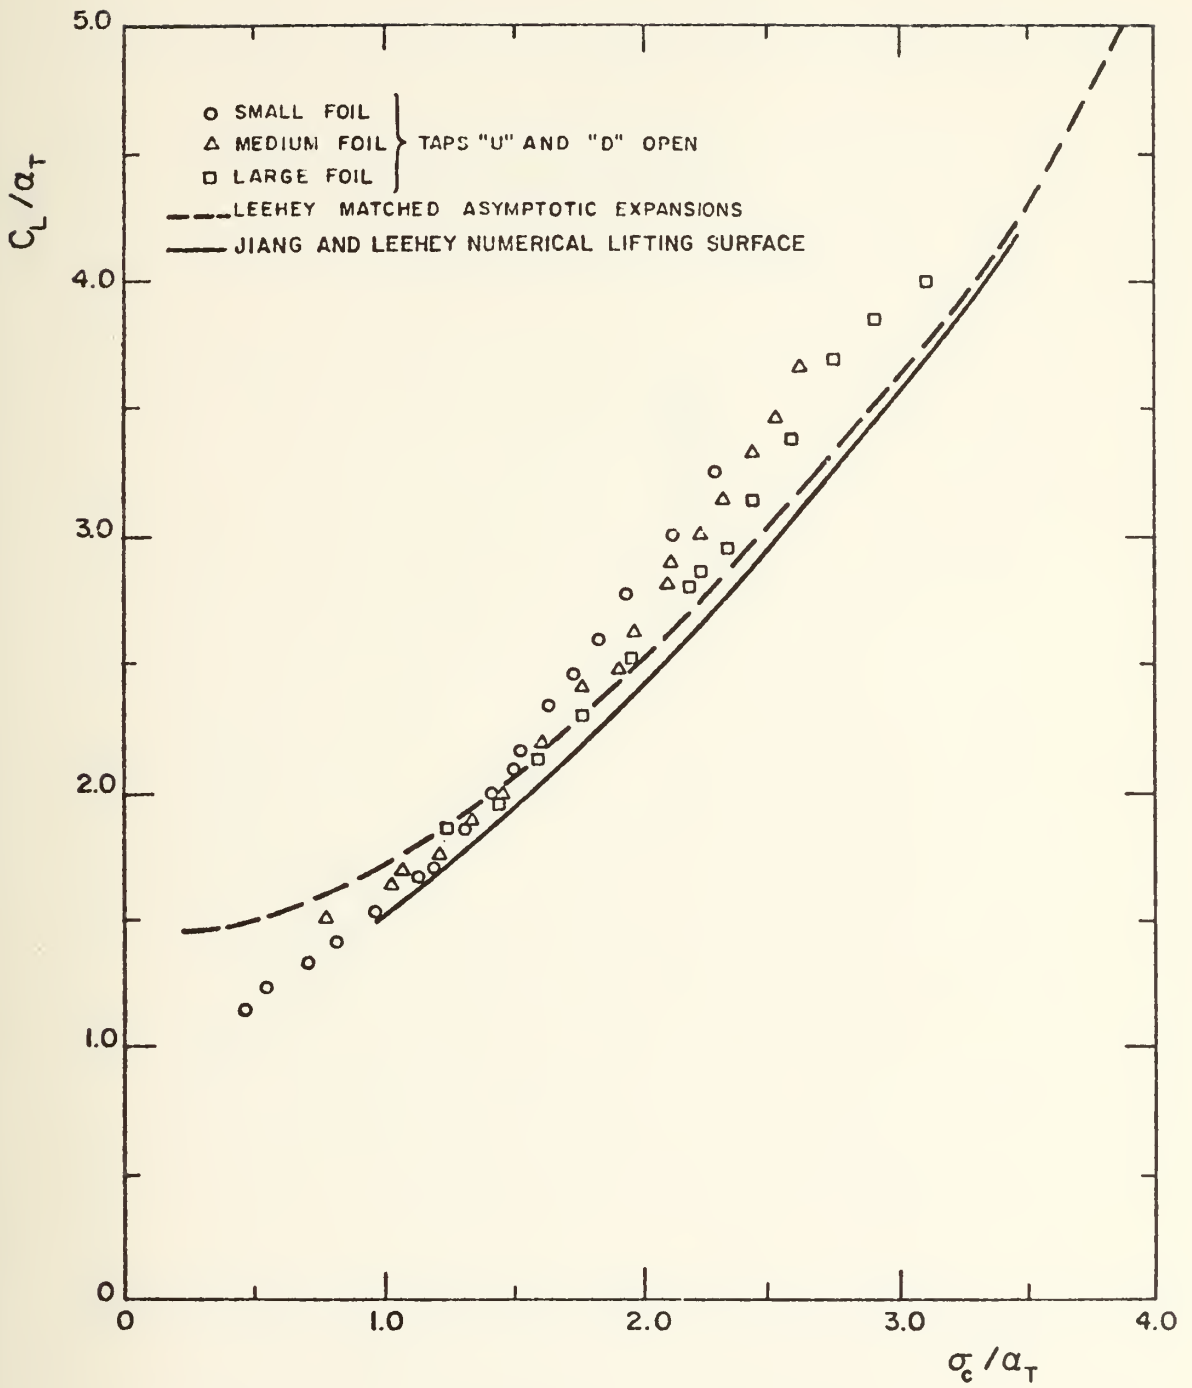


FIG. 9:  $C_L/a_T$  vs  $\sigma_c/a_T$ ,  $\alpha = 16.0^\circ$



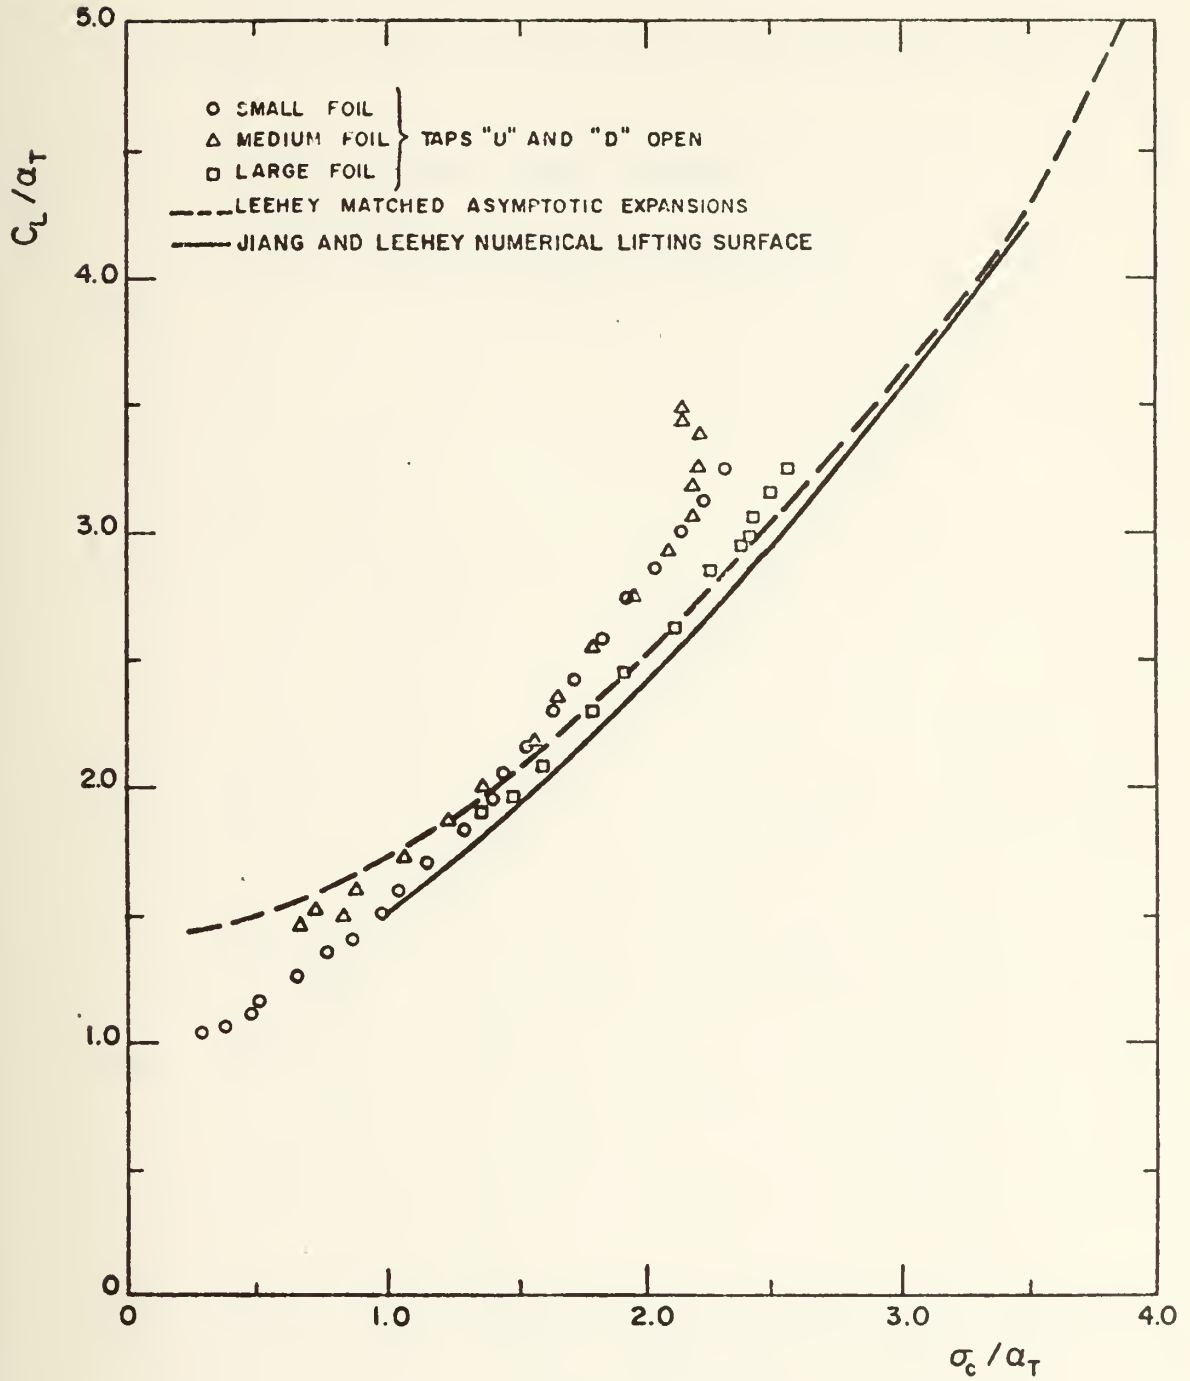


FIG.10:  $C_L/a_T$  vs  $\sigma_c/a_T$ ,  $\alpha = 18.0^\circ$



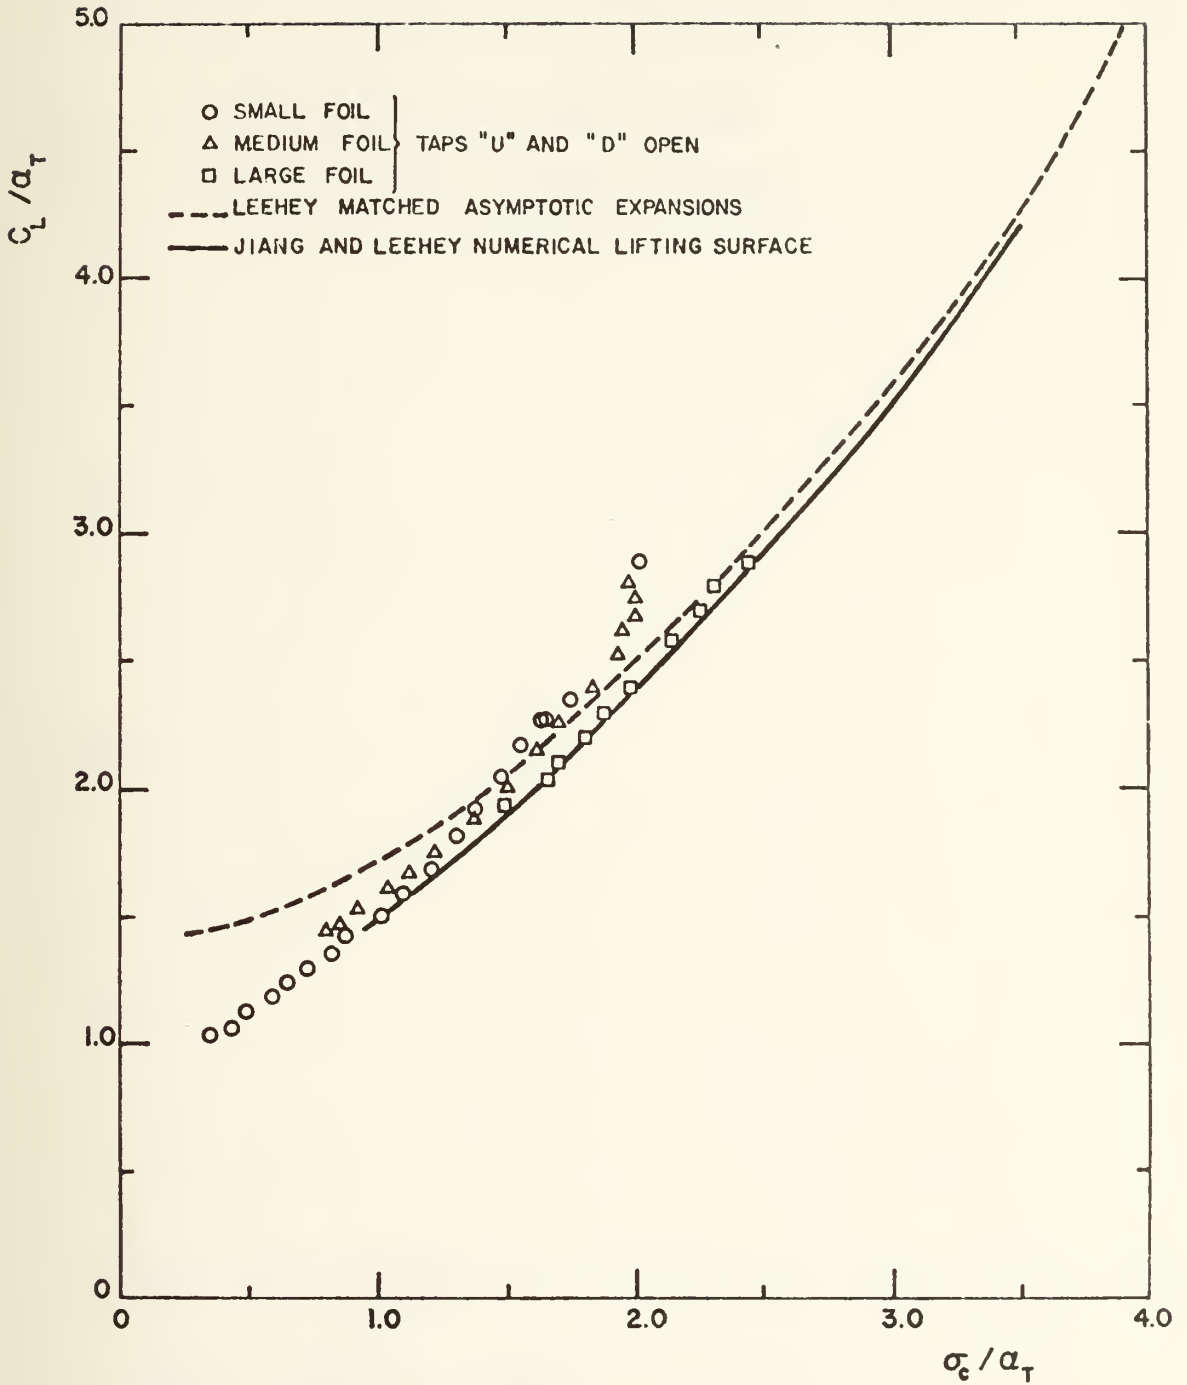


FIG. 11:  $C_L / a_T$  vs  $\sigma_c / a_T$ ,  $\alpha = 21.0^\circ$



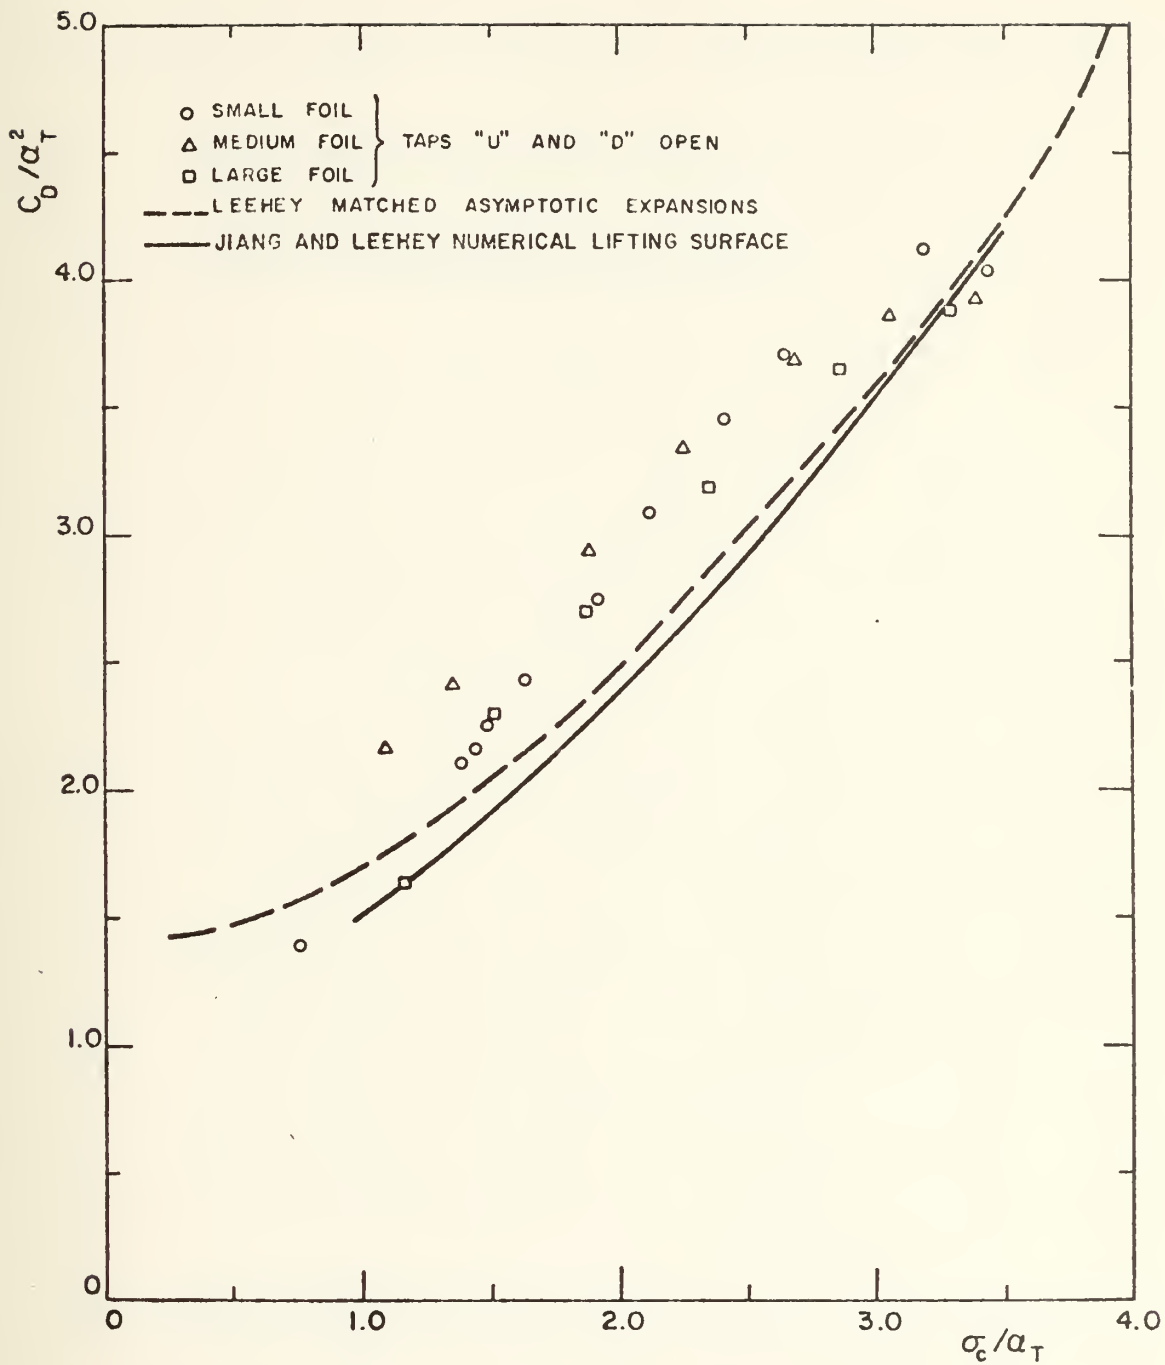


FIG. 12:  $C_D/a_T^2$  vs  $\sigma_c/a_T$ ,  $\alpha = 8.0^\circ$





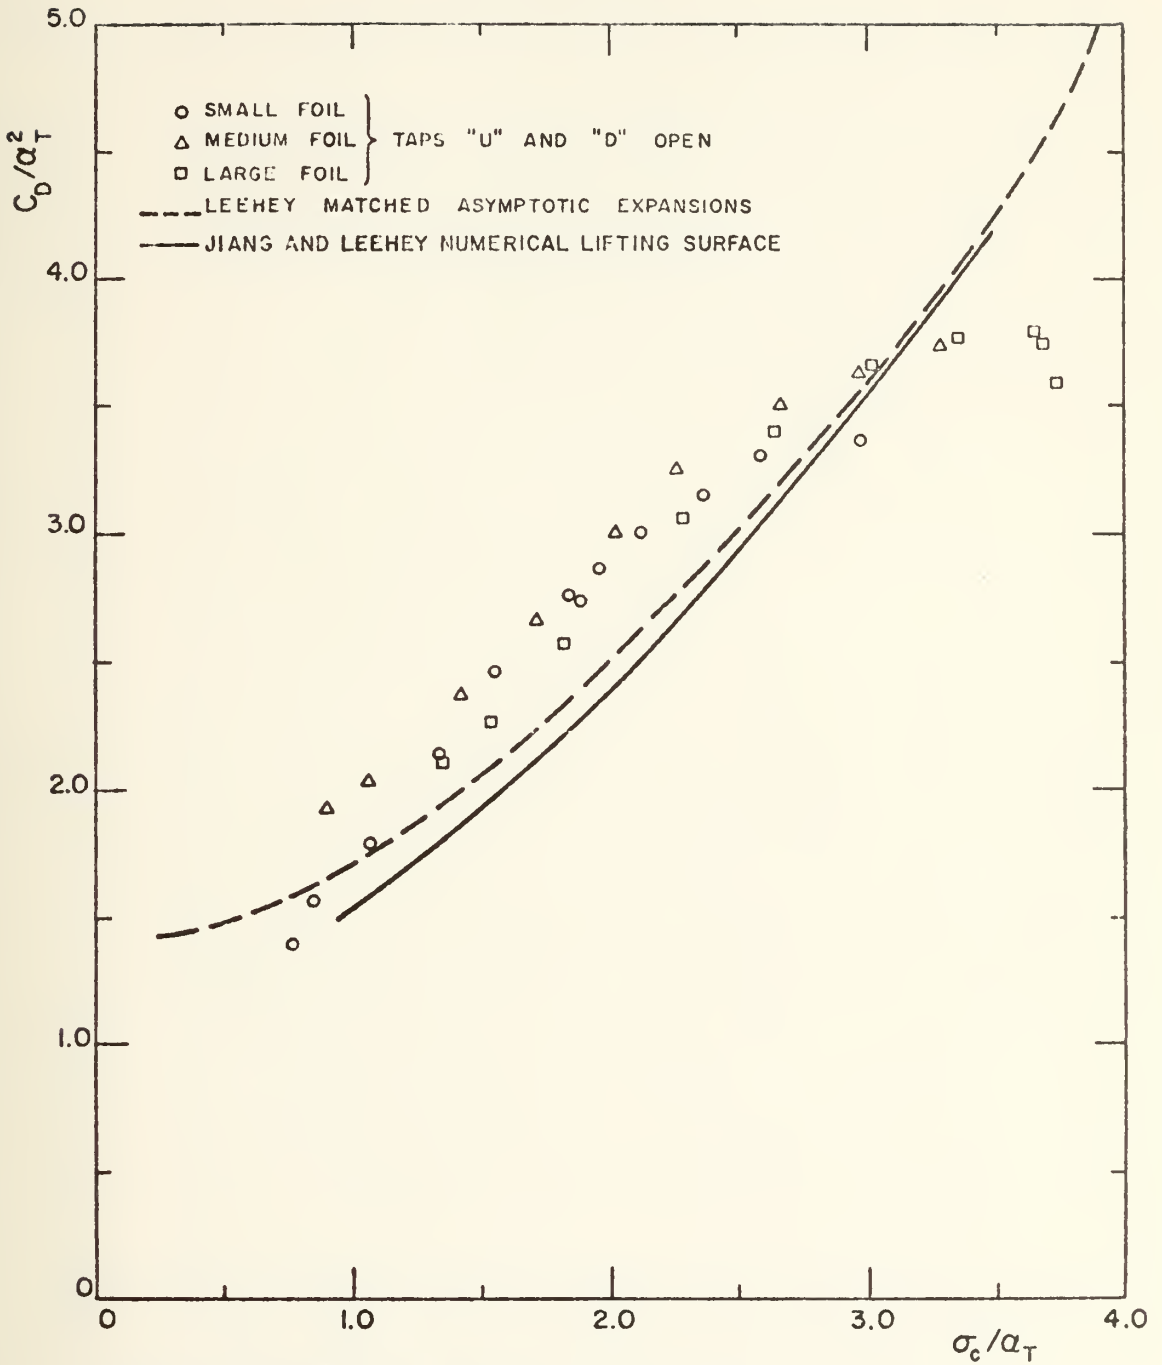


FIG. 13:  $C_D/a_T^2$  vs  $\sigma_c/a_T$ ,  $\alpha = 9.5^\circ$



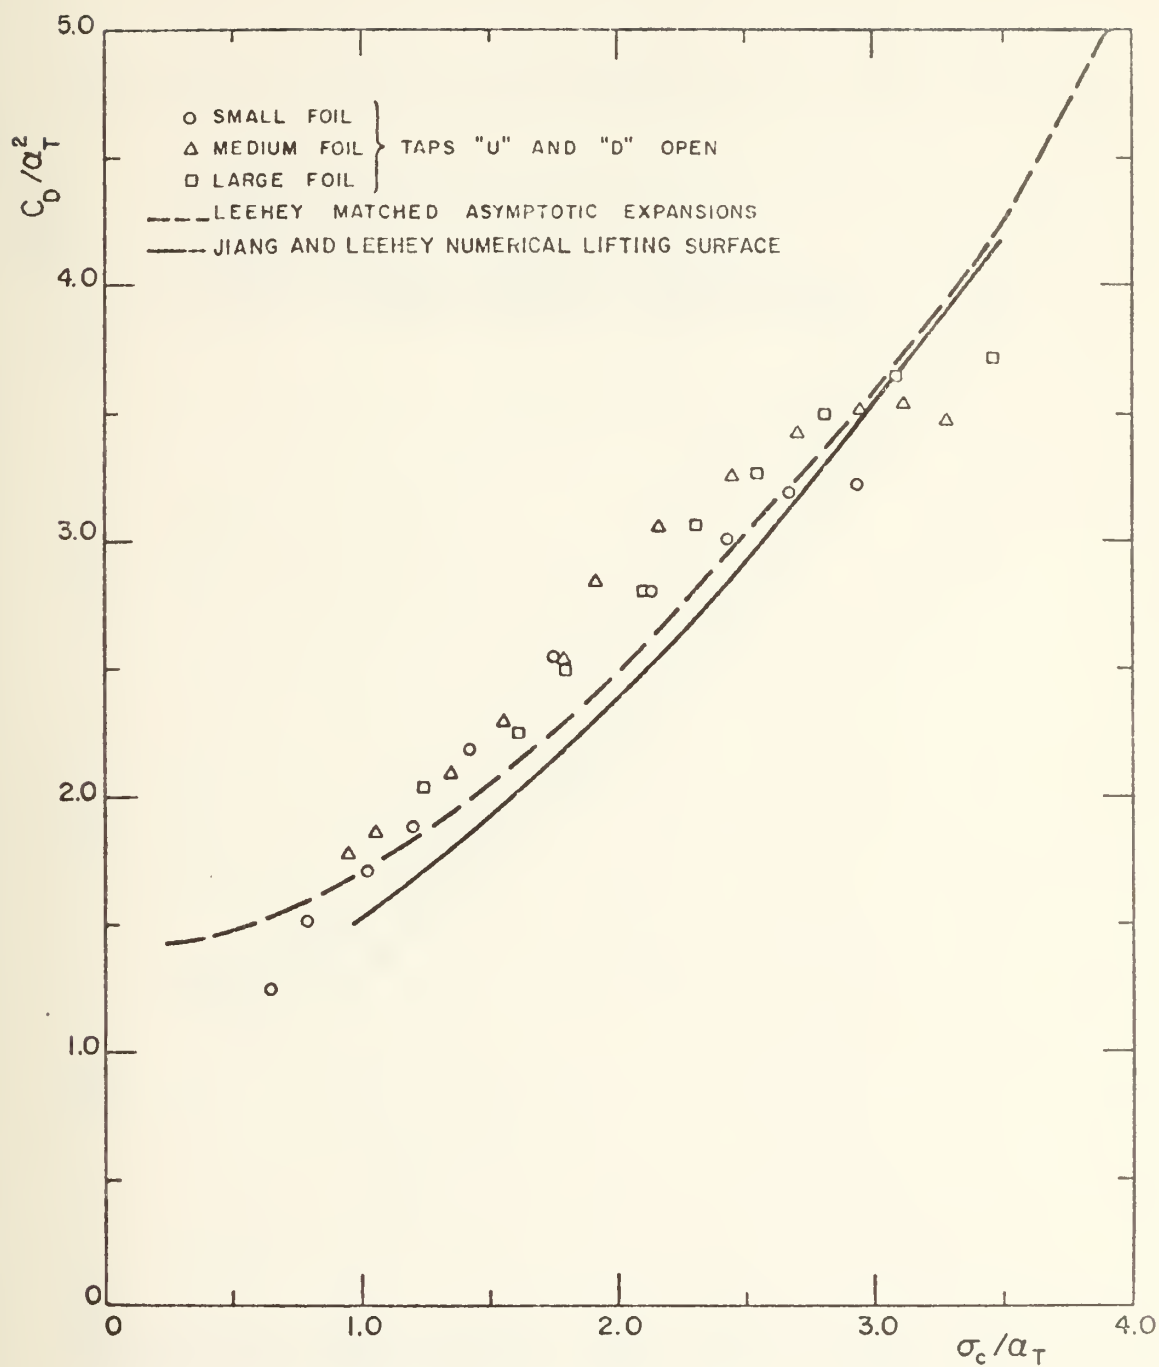


FIG. 14:  $C_D/a_T^2$  vs  $\sigma_c/a_T$ ,  $\alpha = 11.0^\circ$



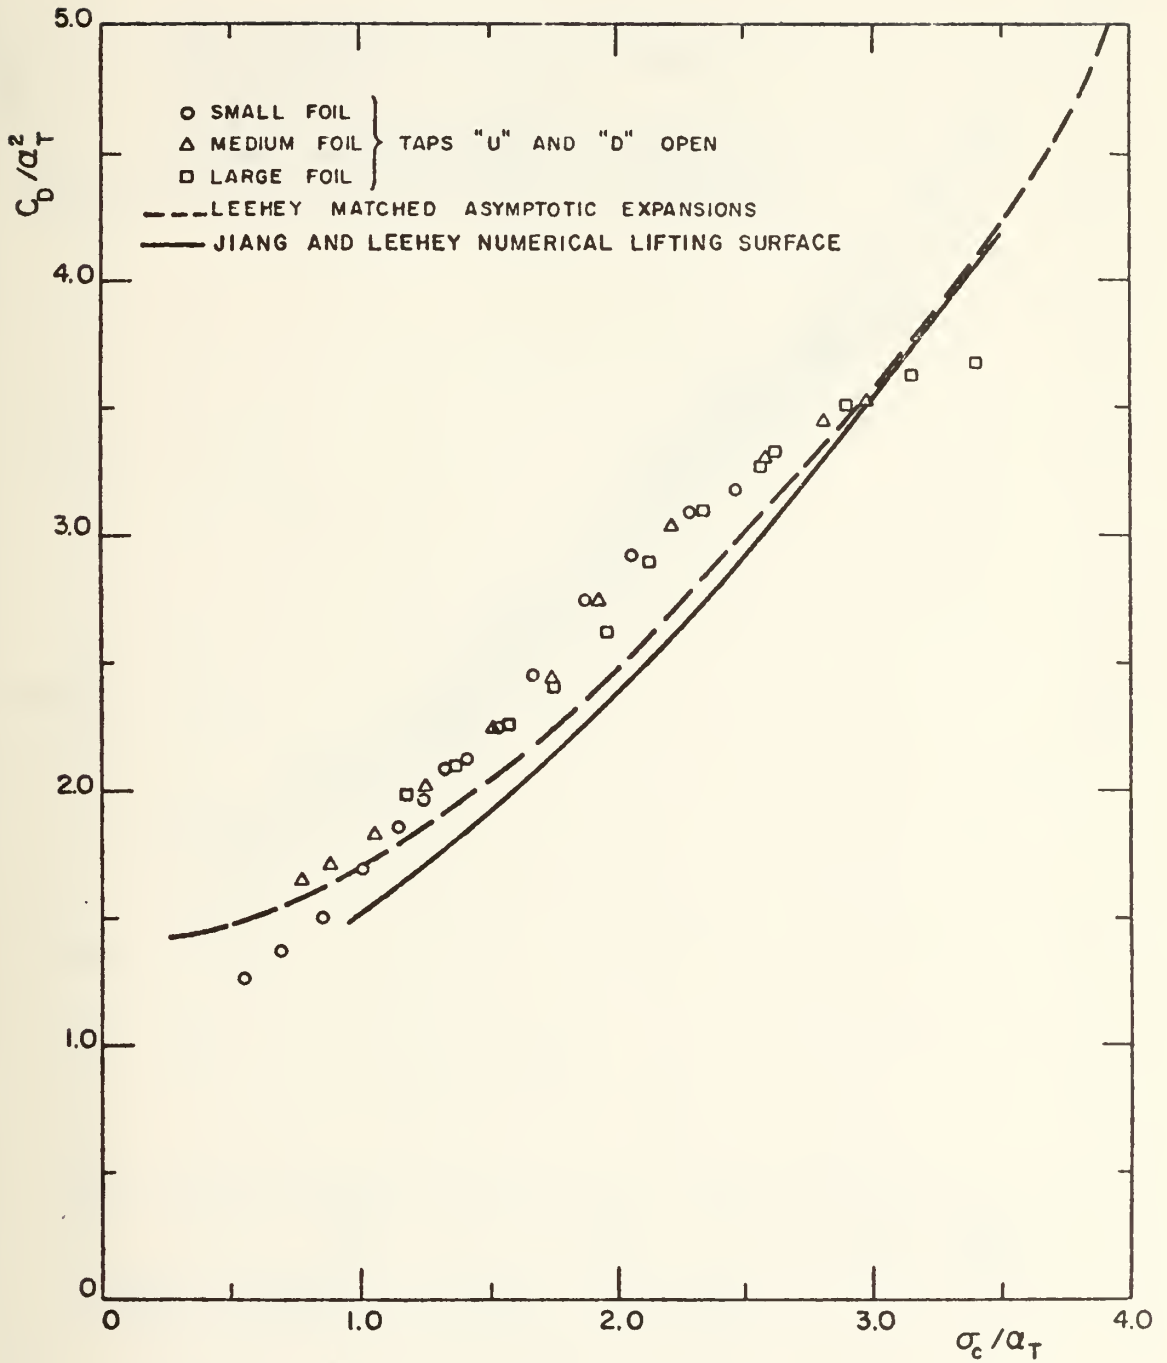


FIG. 15:  $C_D/a_T^2$  vs  $\sigma_c/a_T$ ,  $\alpha = 12.0^\circ$



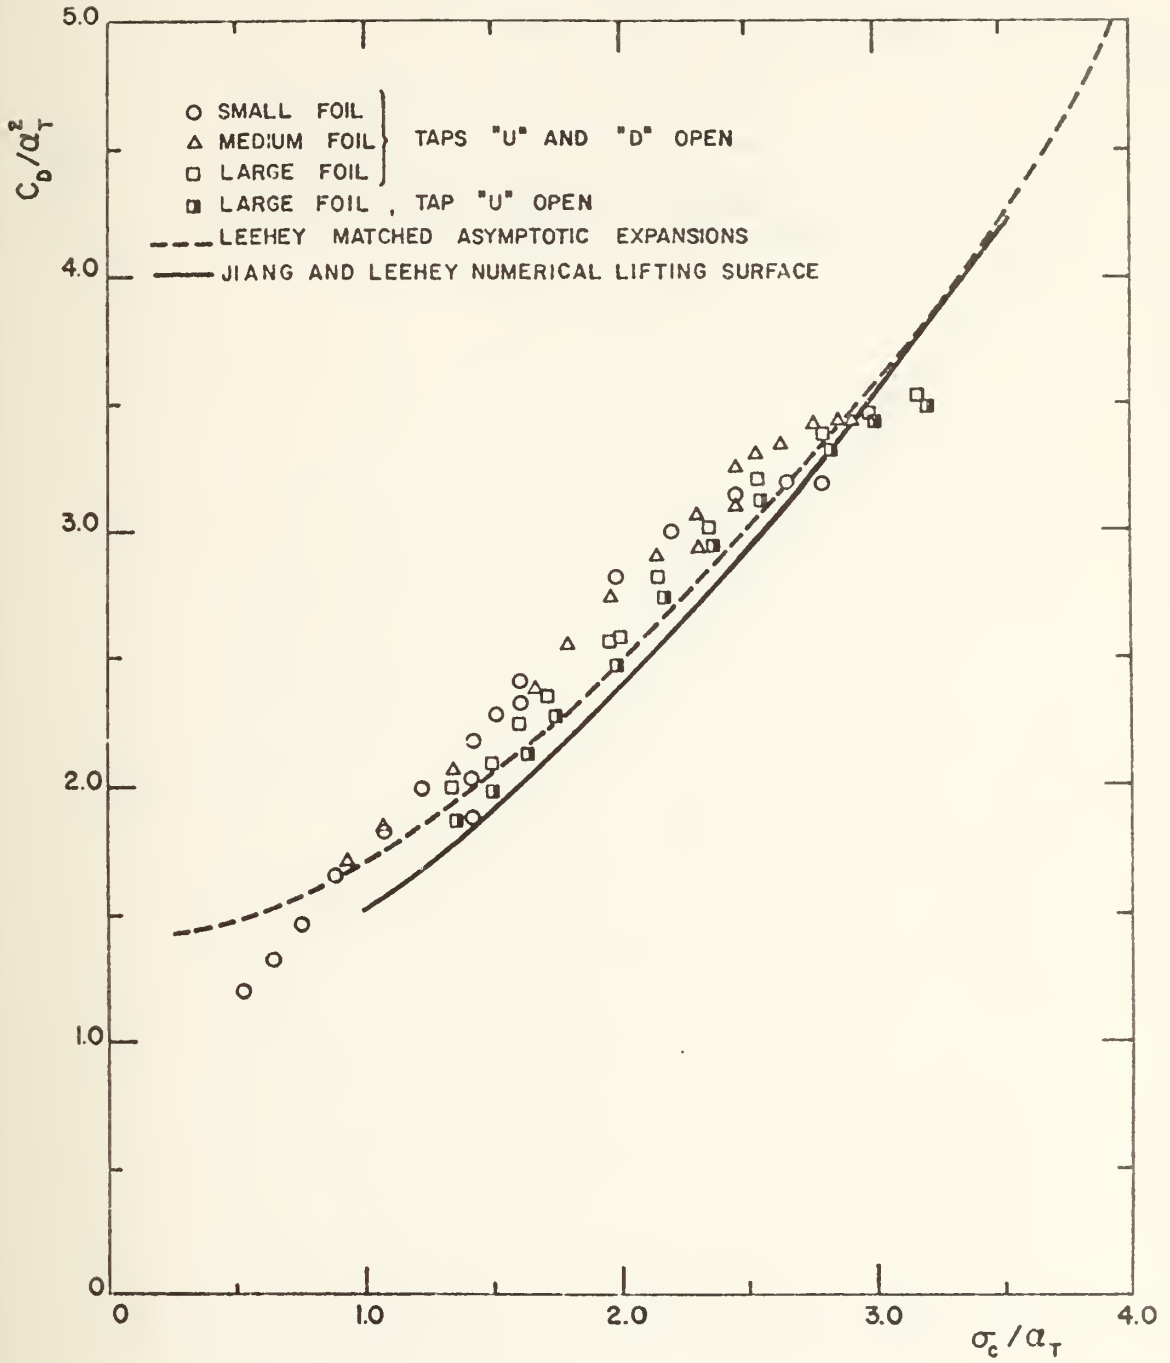


FIG.16:  $C_D/a_T^2$  vs  $\sigma_c/a_T$ ,  $\alpha = 14.0^\circ$





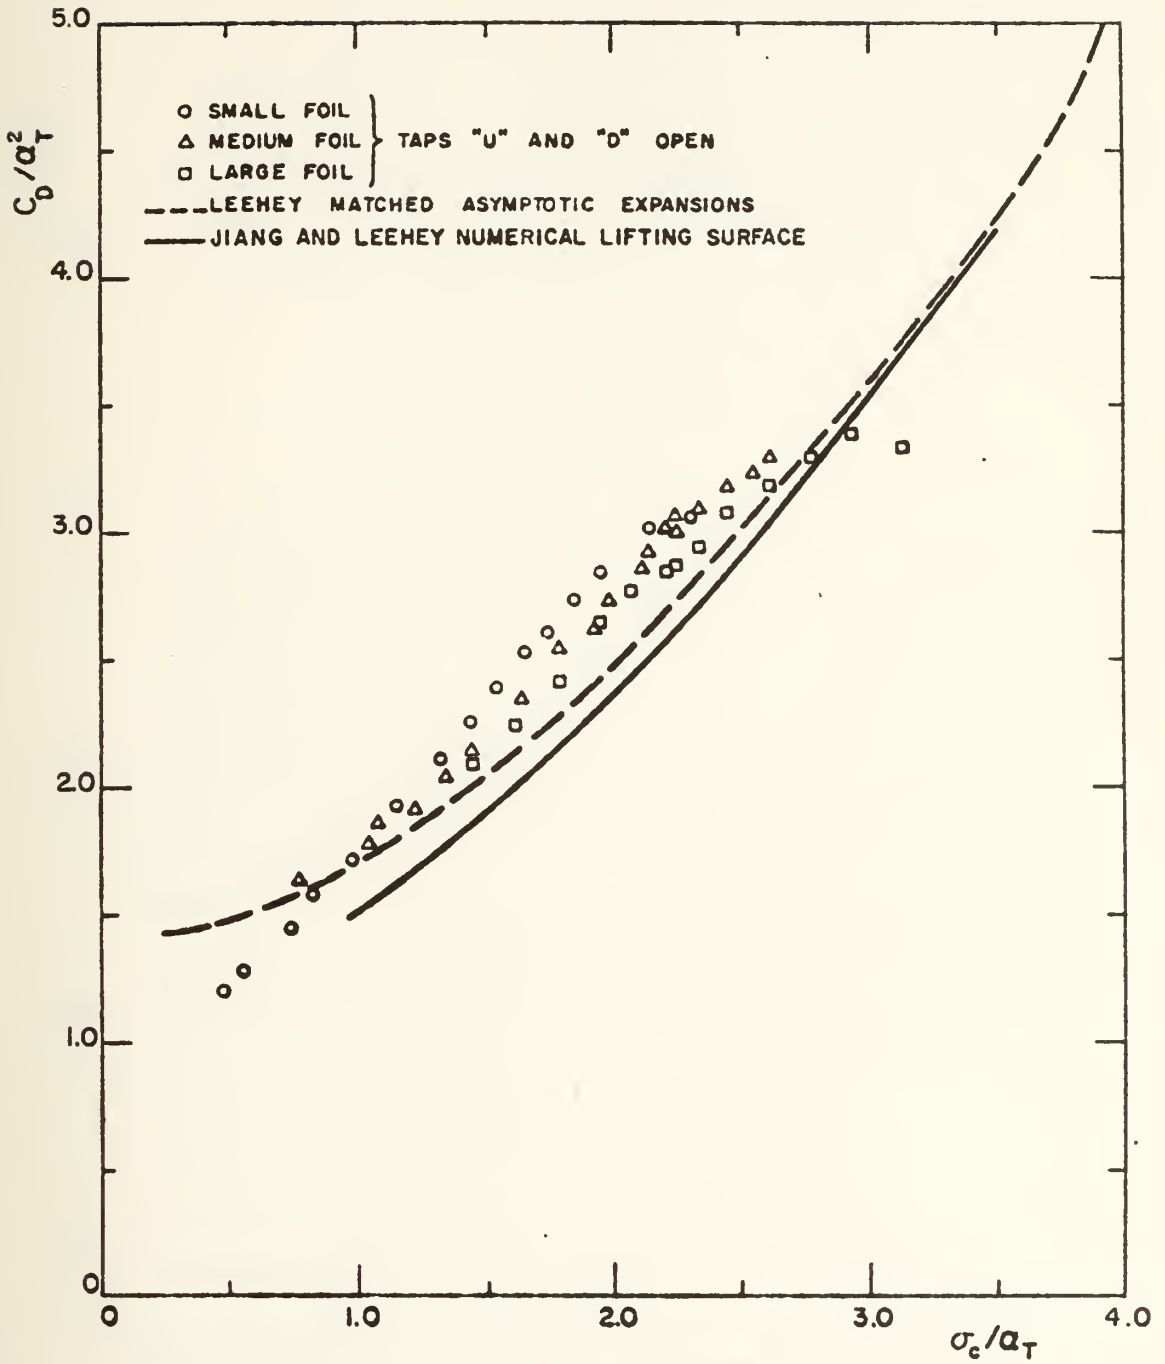


FIG. 17:  $C_D/a_T^2$  vs  $\sigma_c/a_T$ ,  $\alpha = 16.0^\circ$



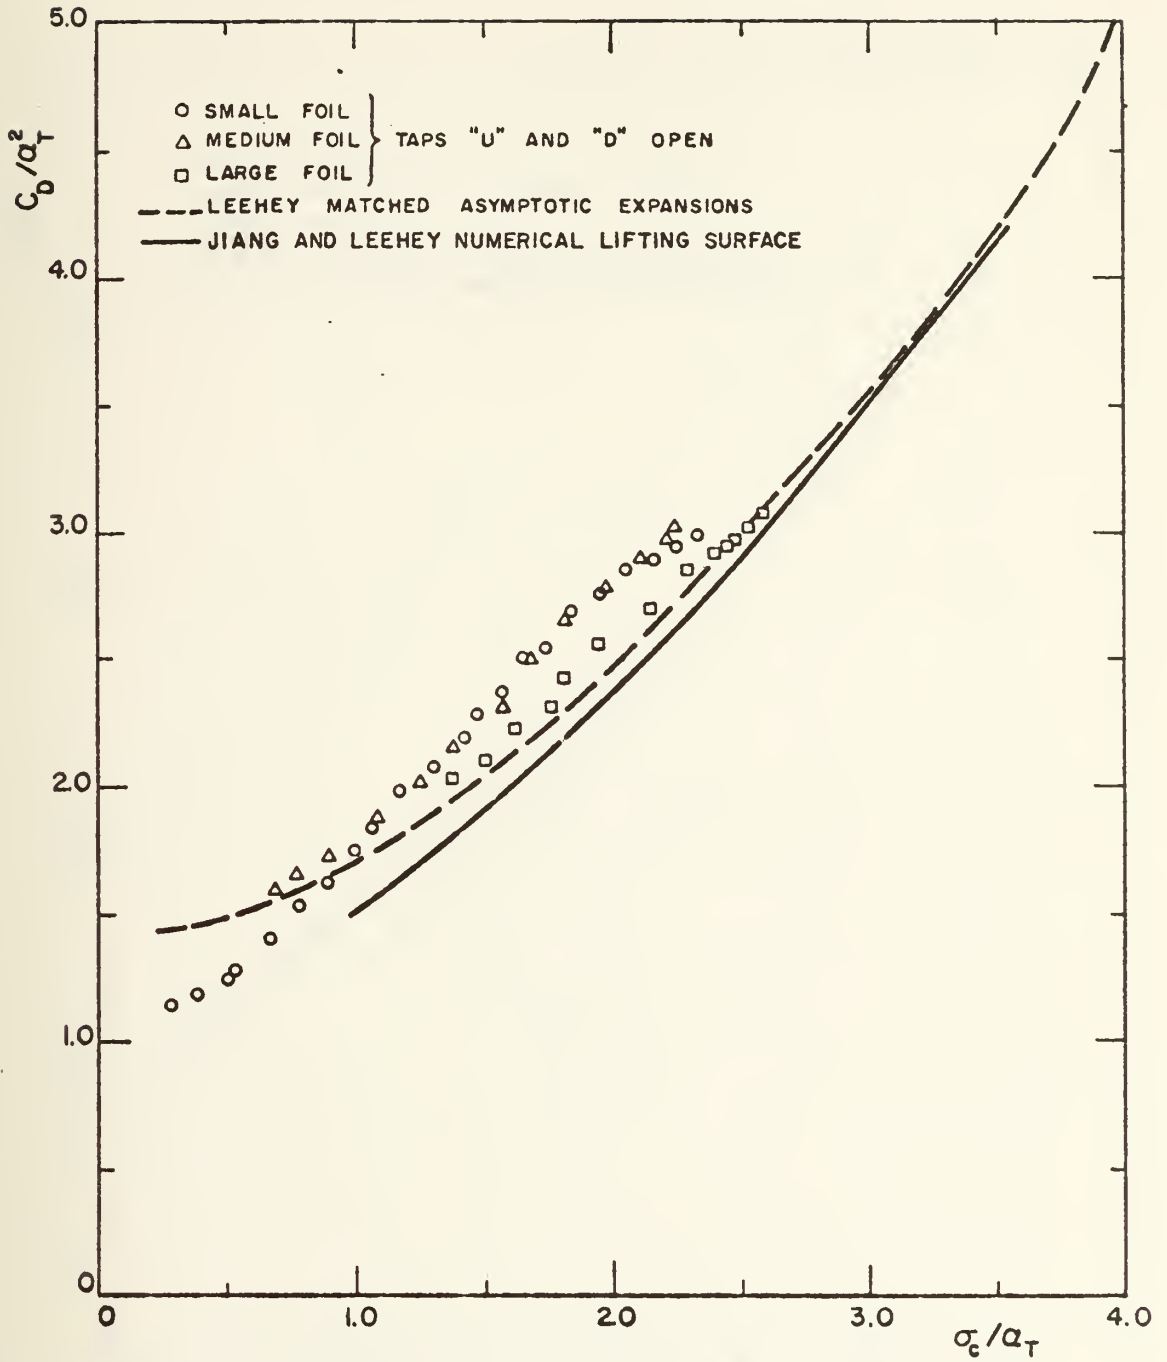


FIG. 18:  $C_D/a_T^2$  vs  $\sigma_c/a_T$ ,  $\alpha = 18.0^\circ$



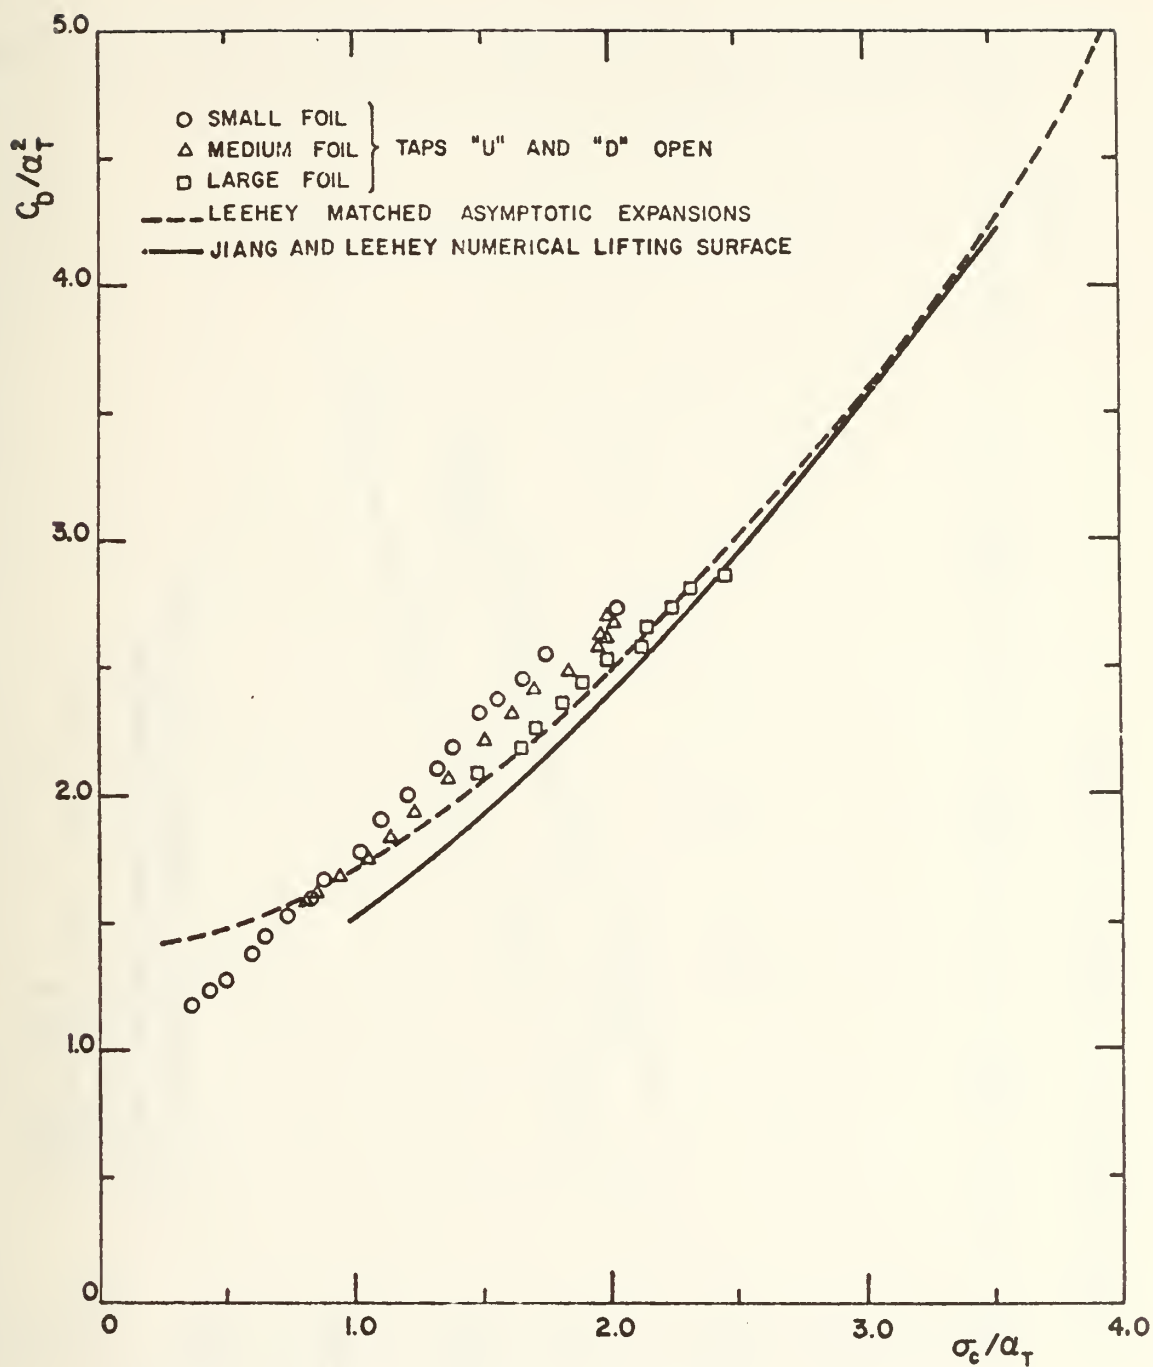


FIG.19:  $C_D/a_T^2$  vs  $\sigma_c/a_T$ ,  $\alpha = 21.0^\circ$



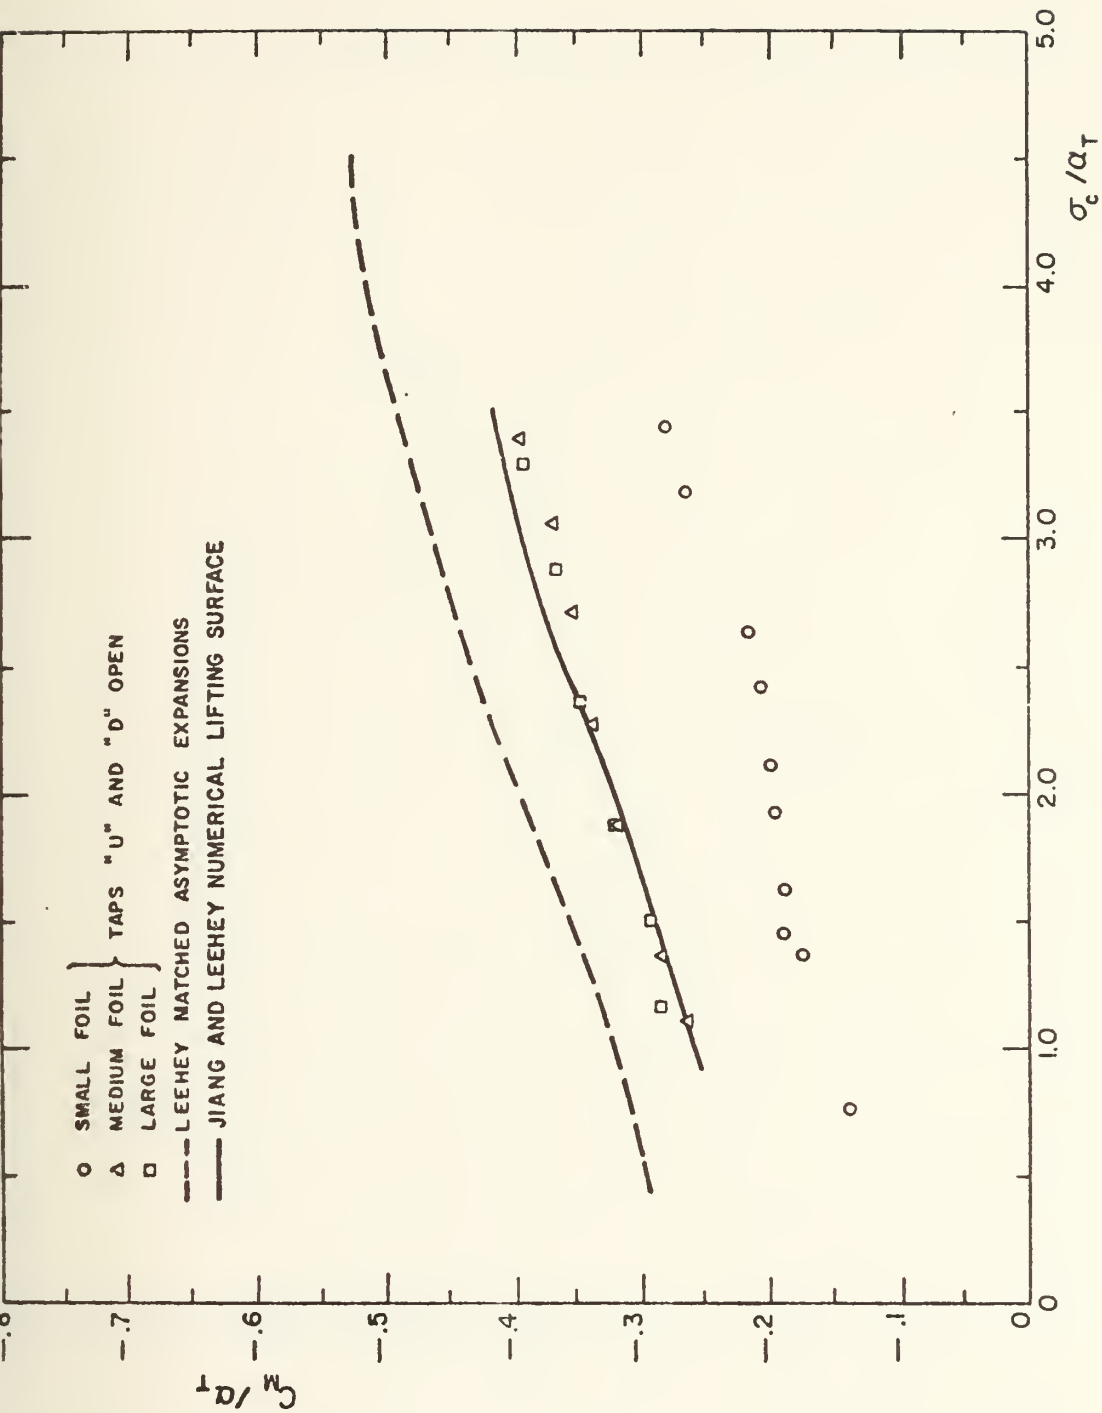


FIG. 20:  $C_M/a_T$  vs  $\sigma_c/a_T$ ,  $\alpha = 8.0^\circ$





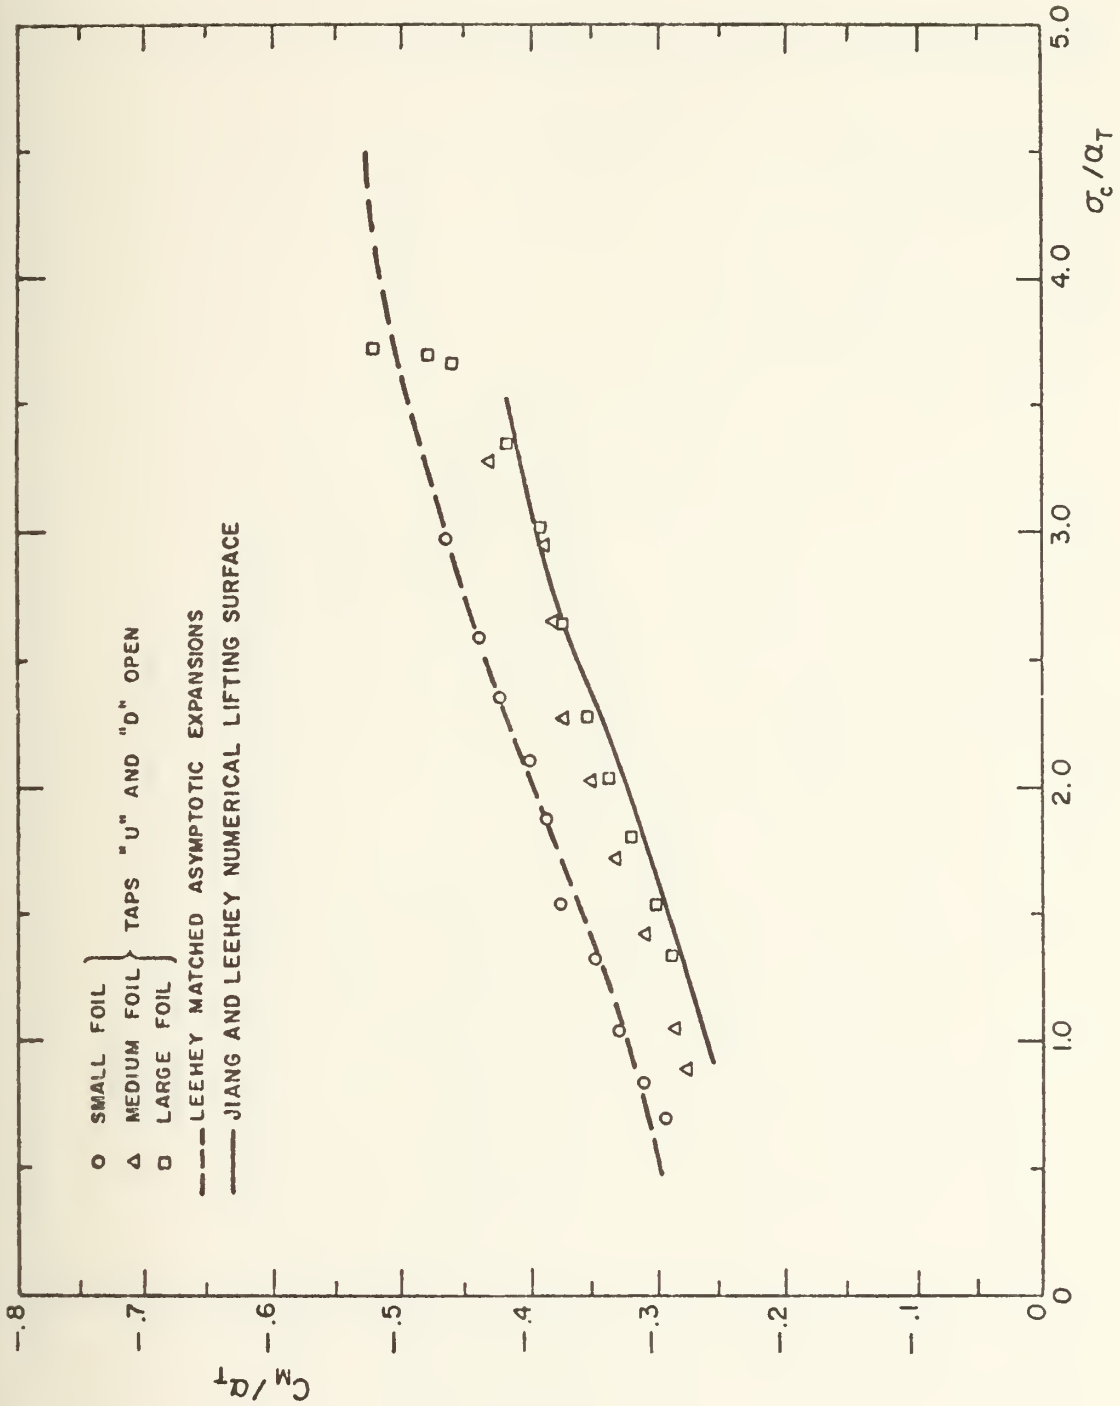


FIG. 21:  $C_M/a_T$  vs  $\sigma_c/a_T$ ,  $\alpha = 9.5^\circ$



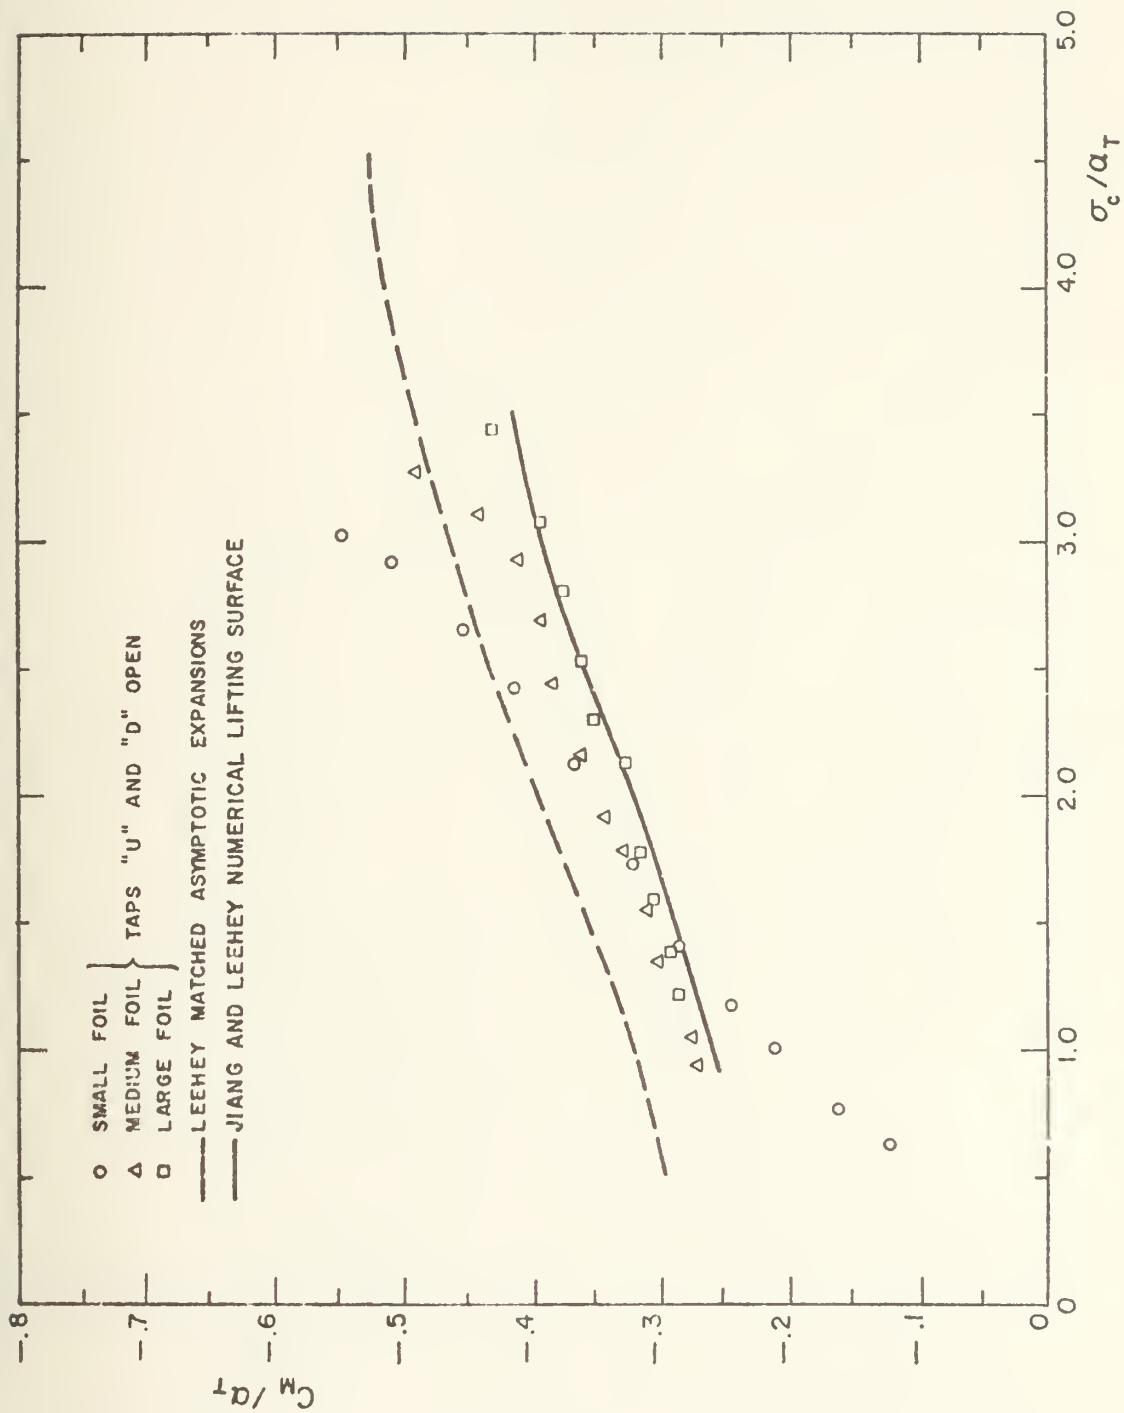


FIG.22:  $C_M / a_T$  vs  $\sigma_c / a_T$ ,  $\alpha = 11.0^\circ$



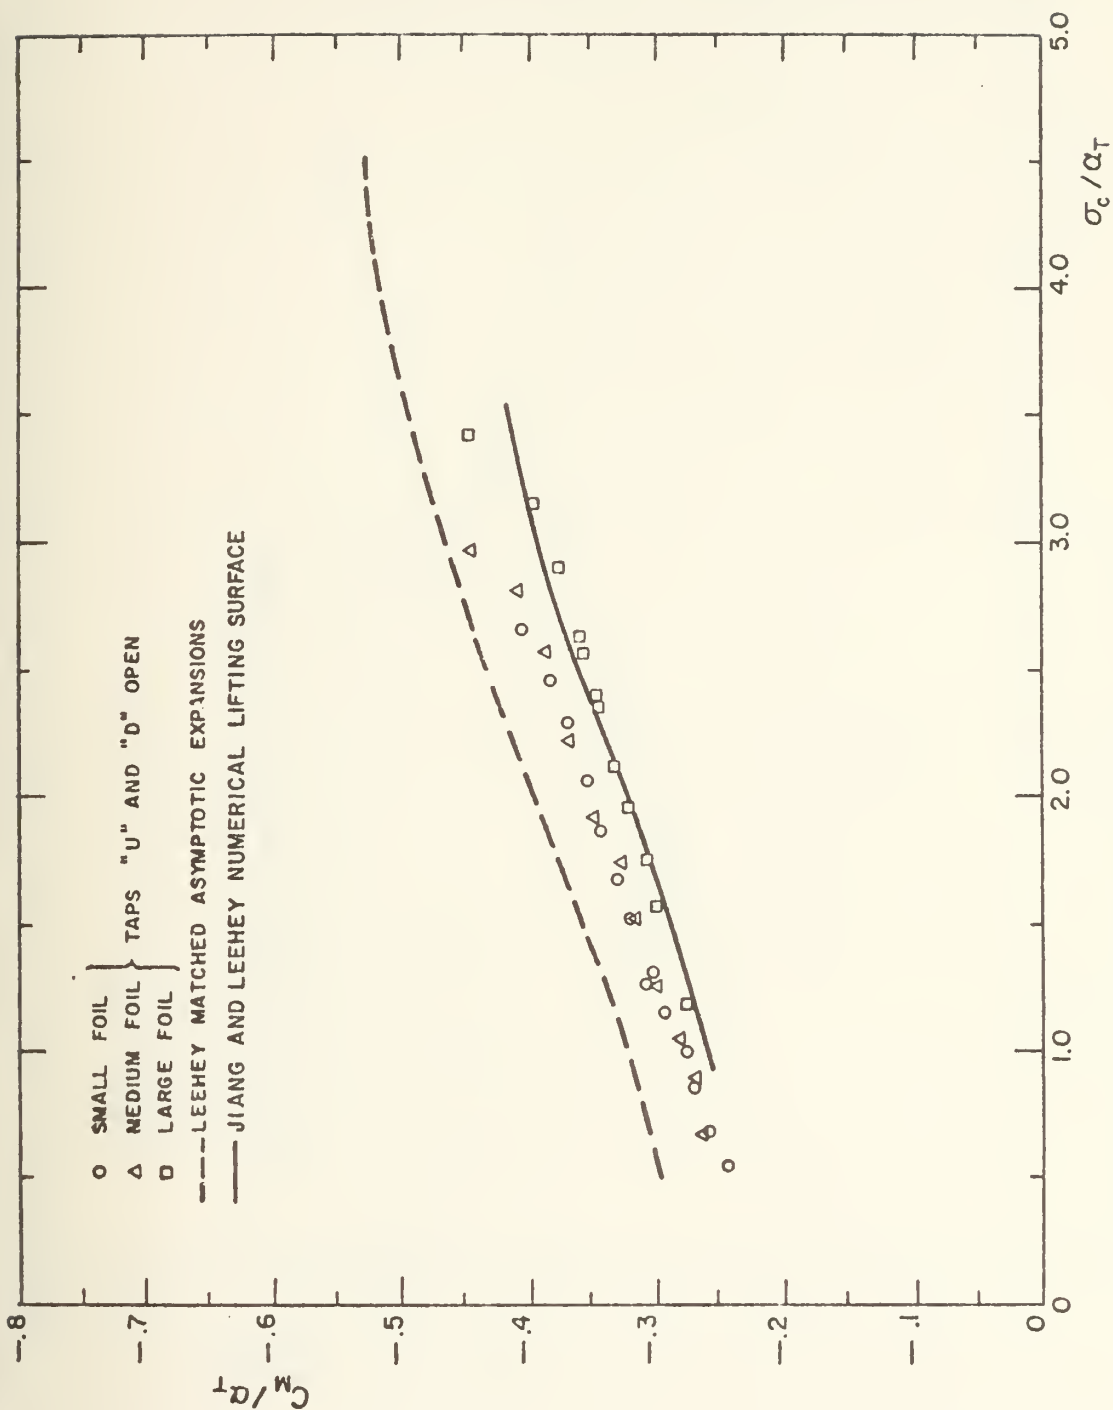


FIG.23:  $C_M / \alpha_T$  vs  $\sigma_c / \alpha_T$ ,  $\alpha = 12.0^\circ$



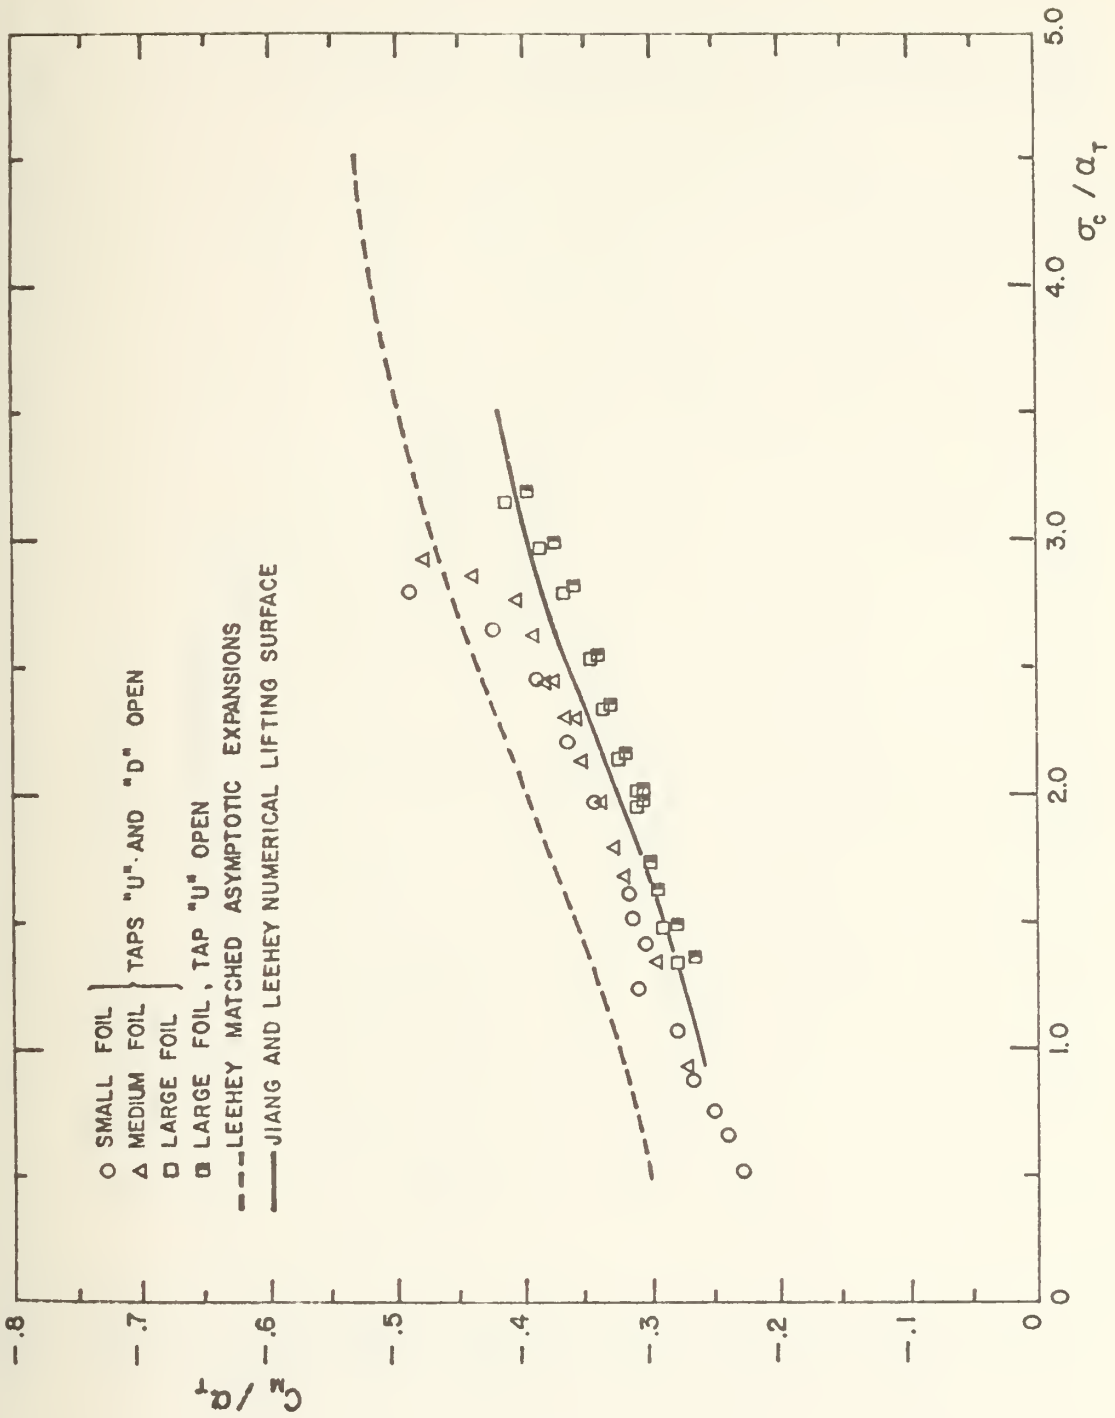


FIG. 24:  $C_m / \alpha_T$  vs  $\sigma_c / \alpha_T$ ,  $\alpha = 14.0^\circ$





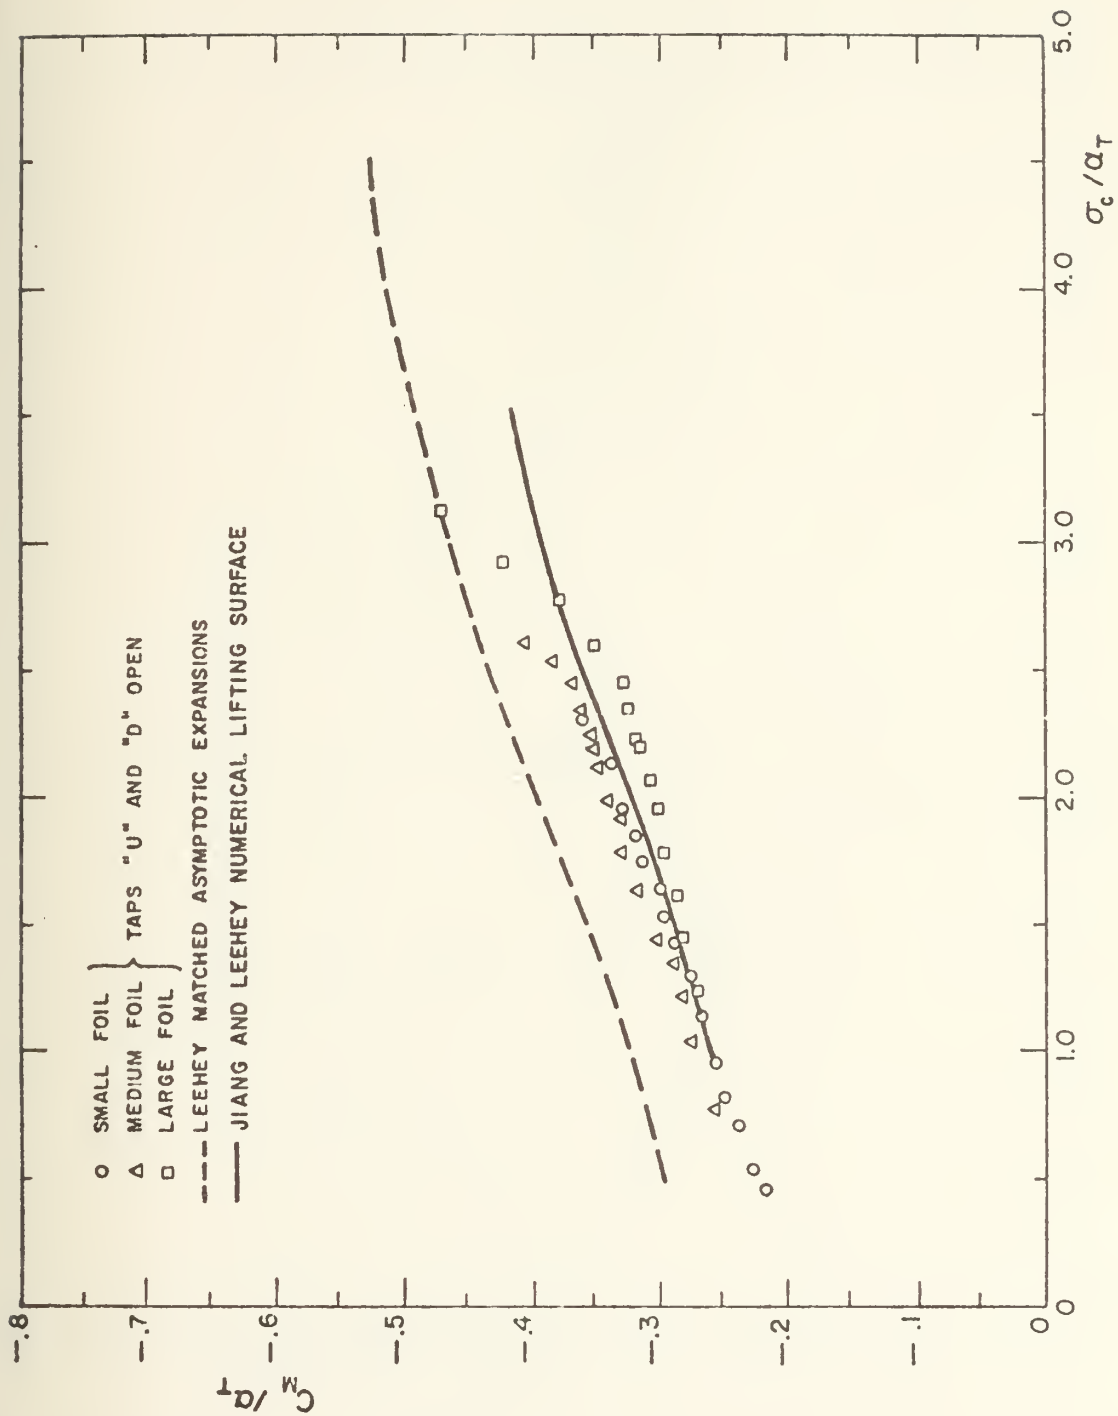


FIG. 25:  $C_M/a_T$  vs  $\sigma_c/a_T$ ,  $\alpha = 16.0^\circ$



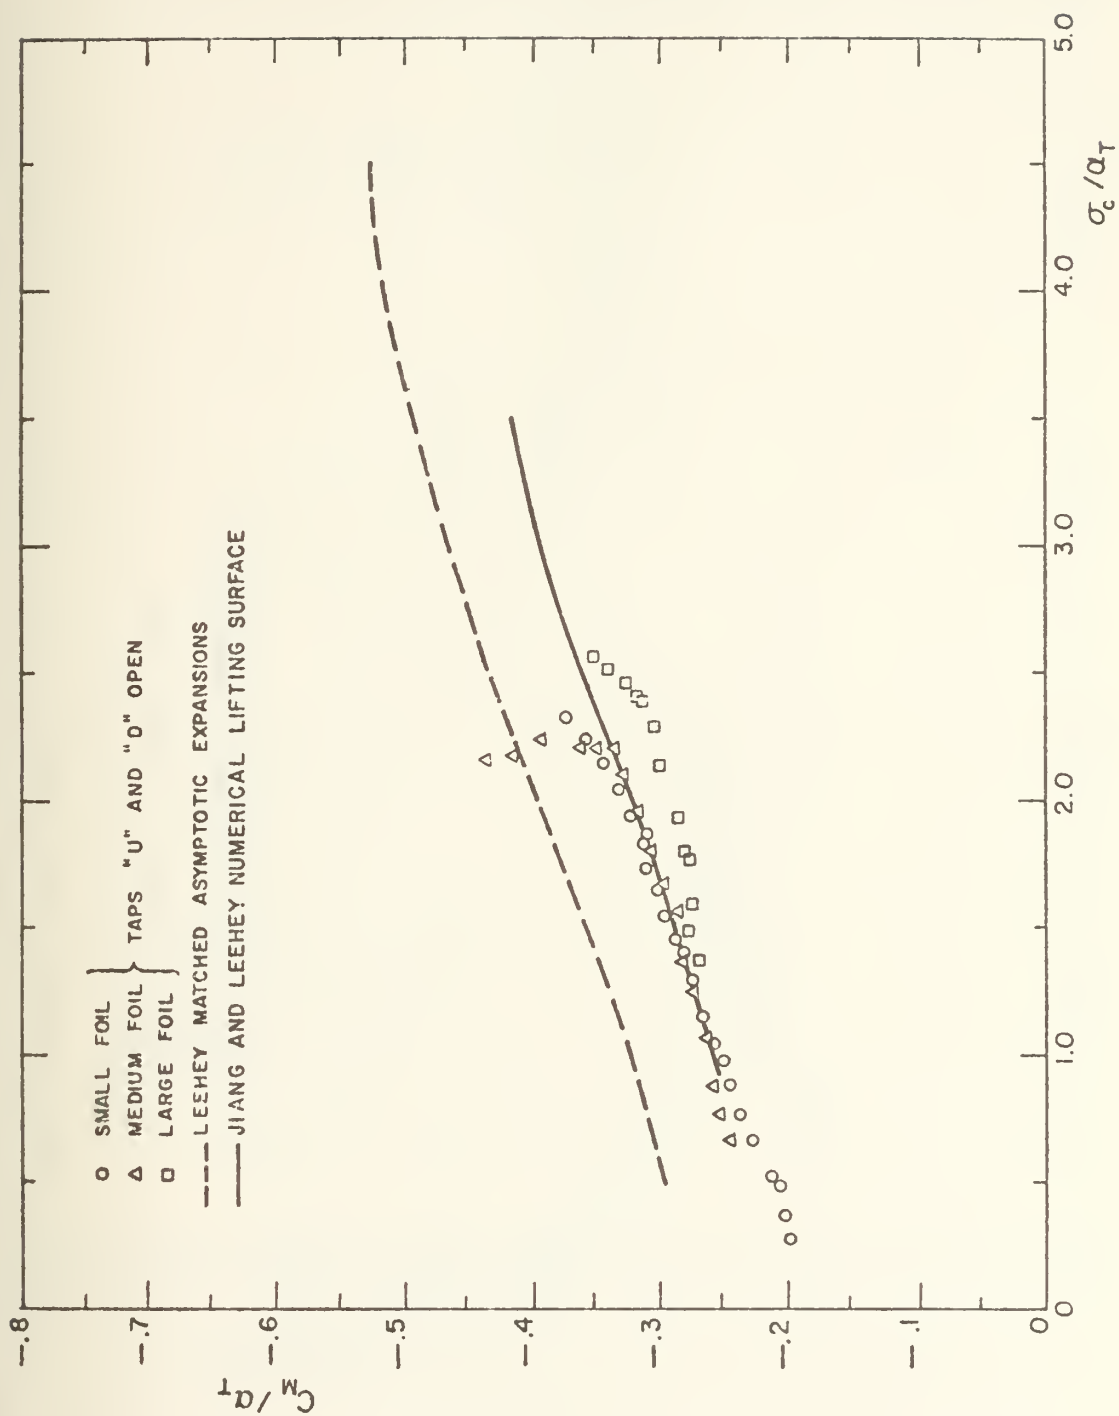


FIG. 26:  $C_M / a_T$  vs  $\sigma_c / a_T$ ,  $\alpha = 18.0^\circ$



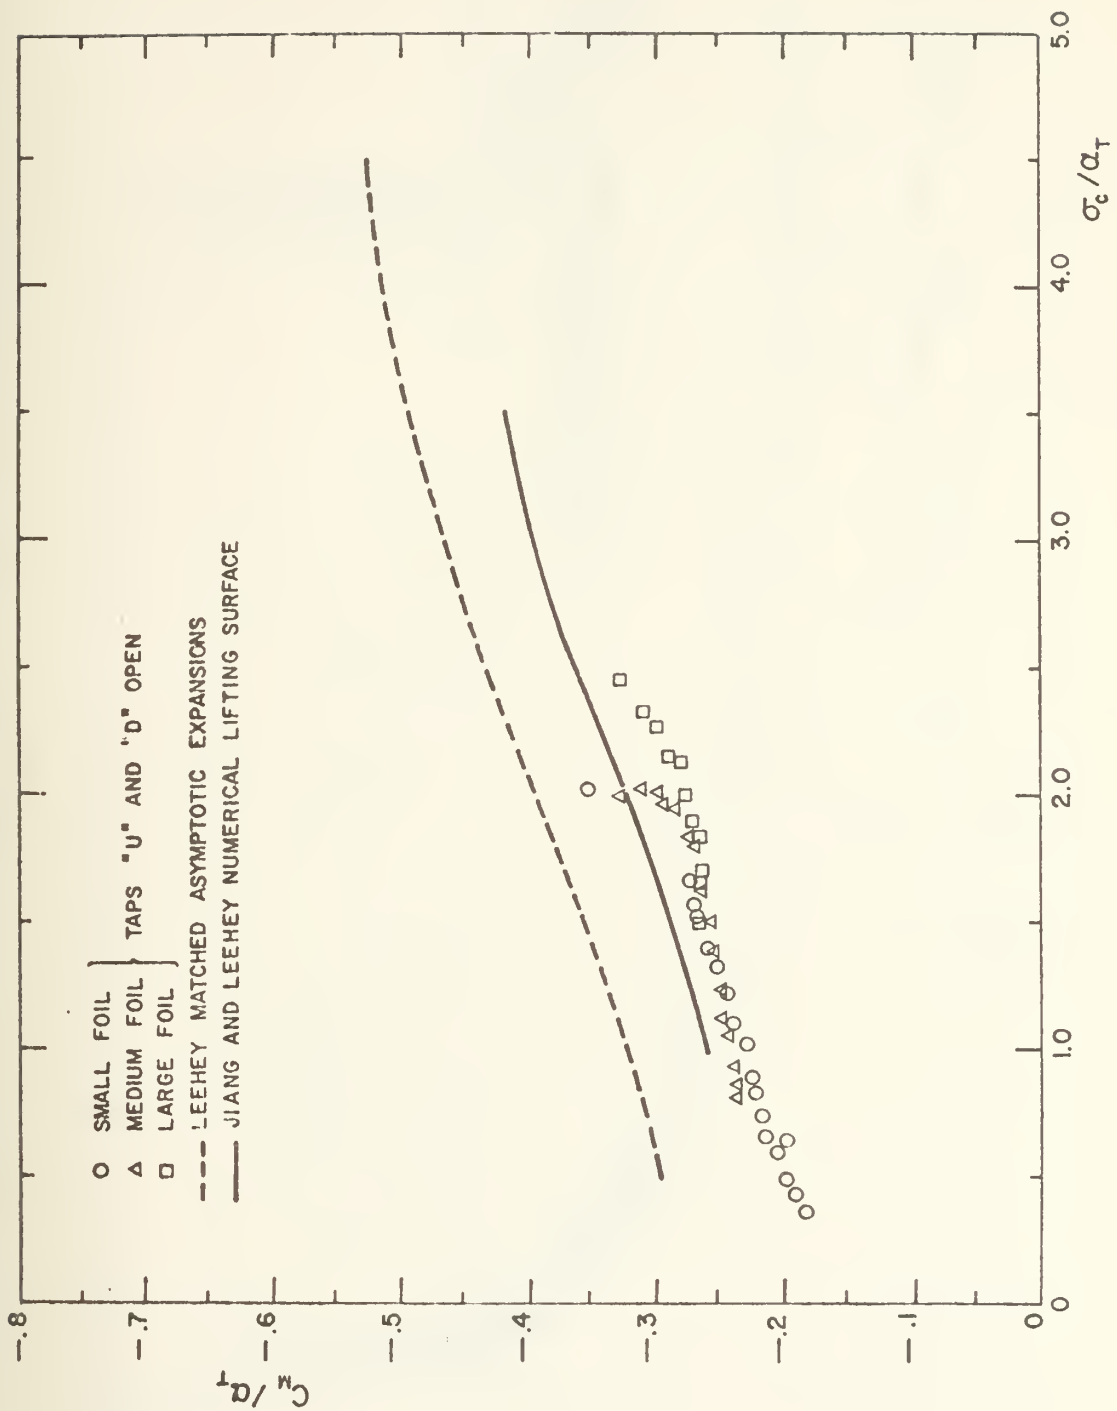


FIG.27:  $C_m/a_T$  vs  $\sigma_c/a_T$ ,  $\alpha = 21.0^\circ$



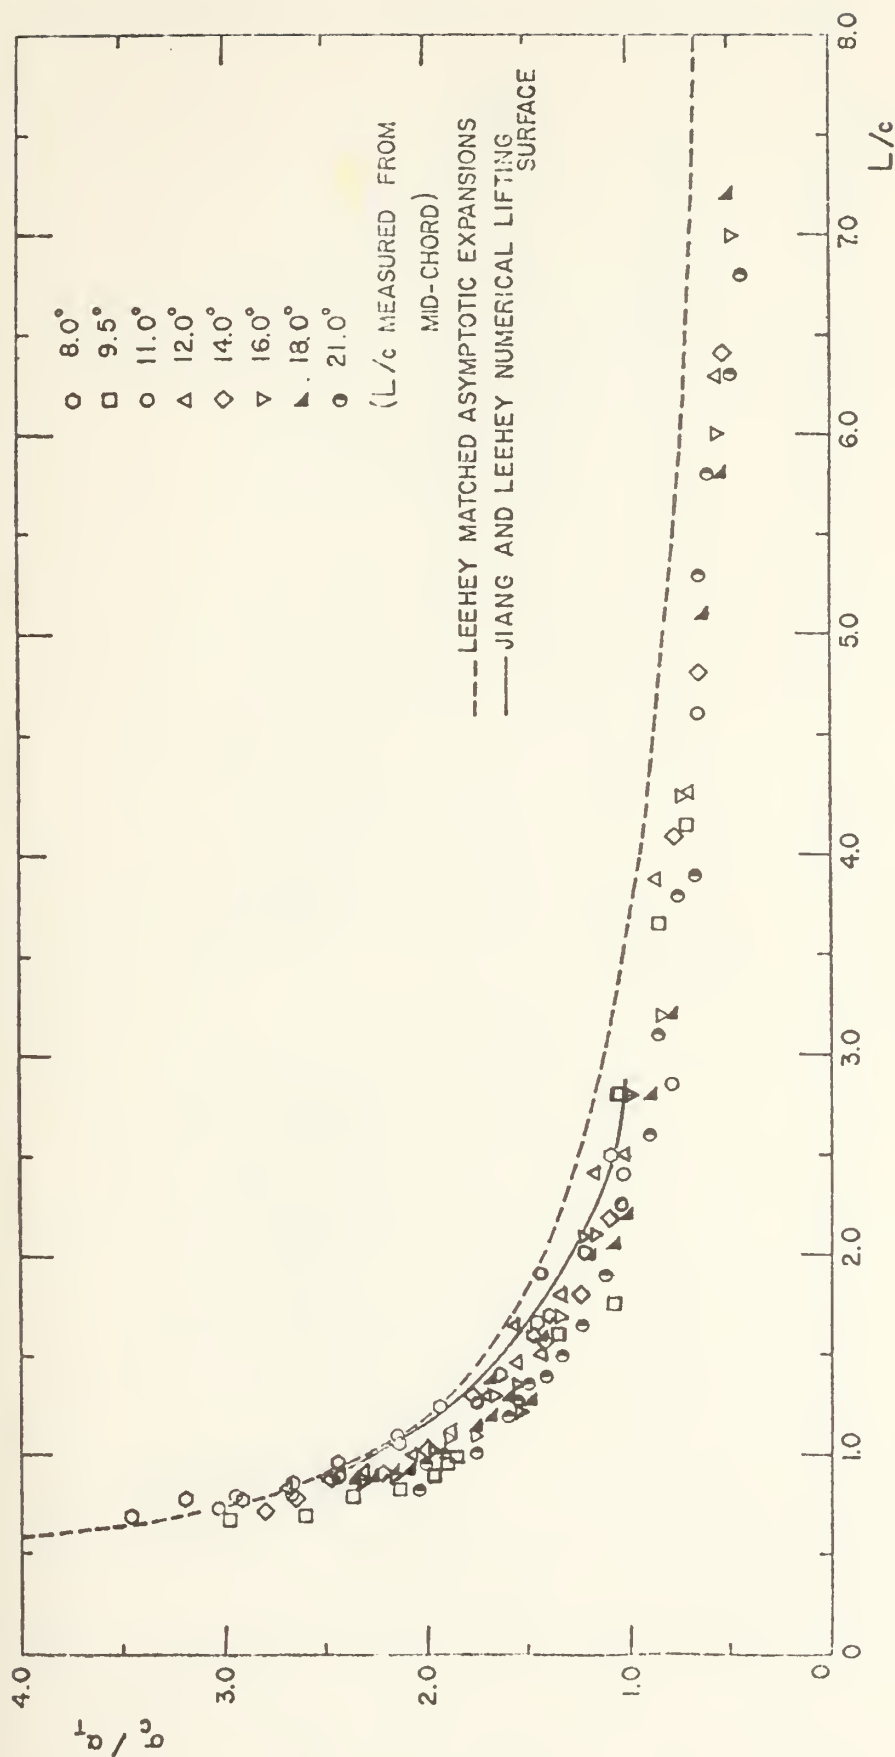


FIG.28:  $\sigma_c / \alpha_T$  vs  $L/c$ , SMALL FOIL





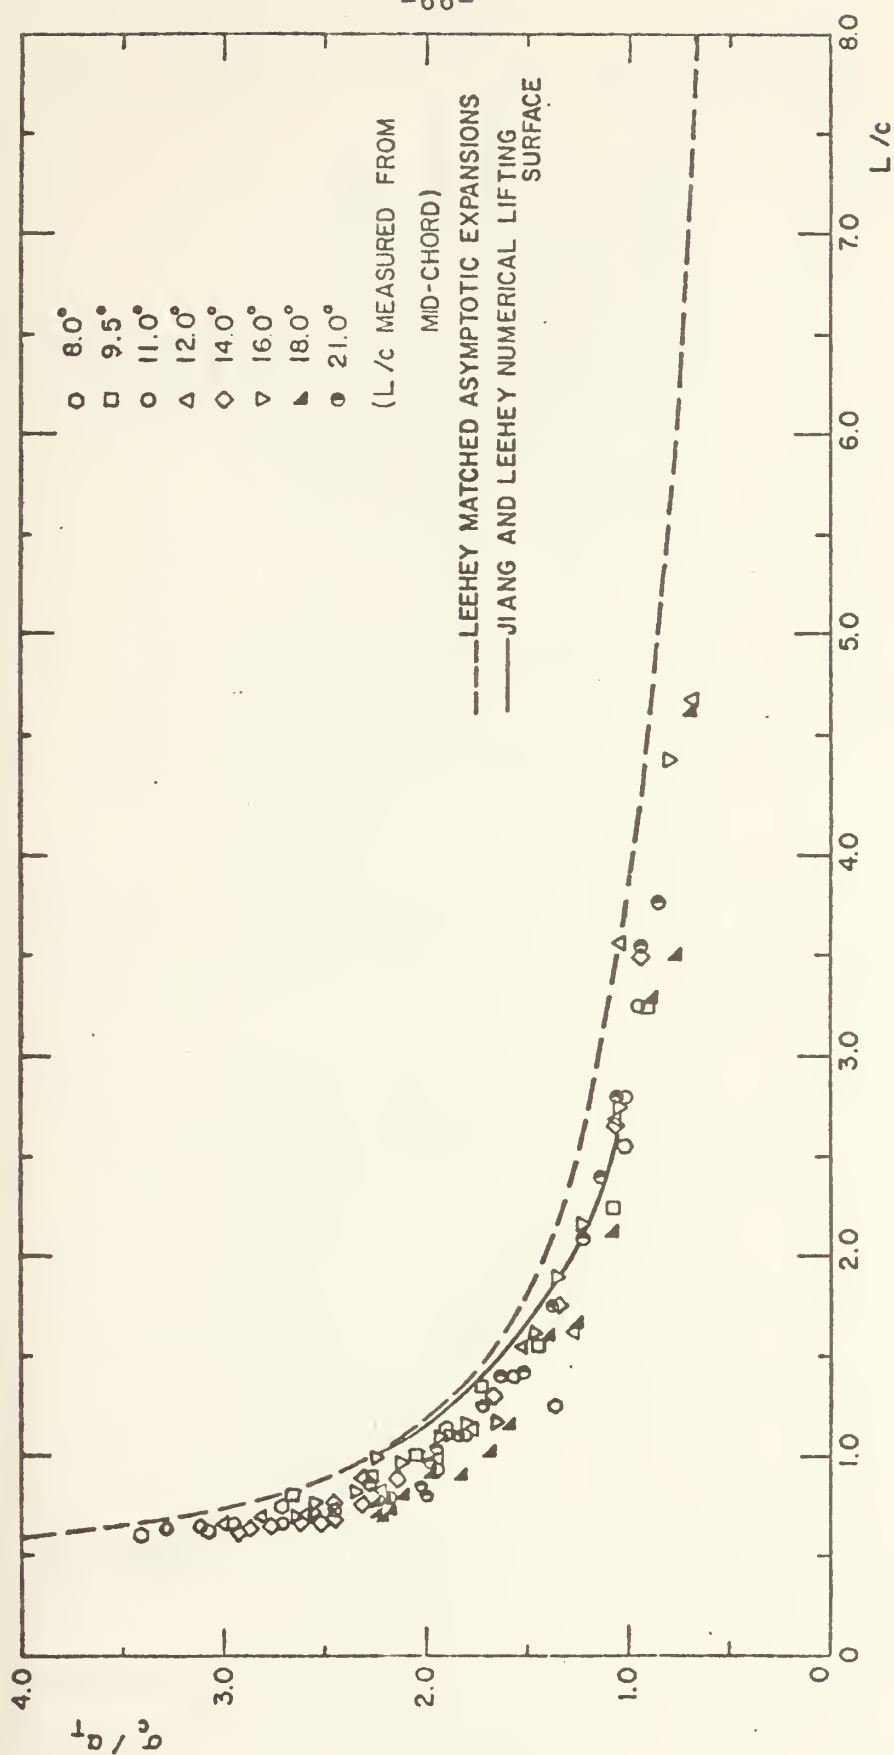


FIG.29:  $\sigma_c / \alpha_T$  vs  $L/c$ , MEDIUM FOIL




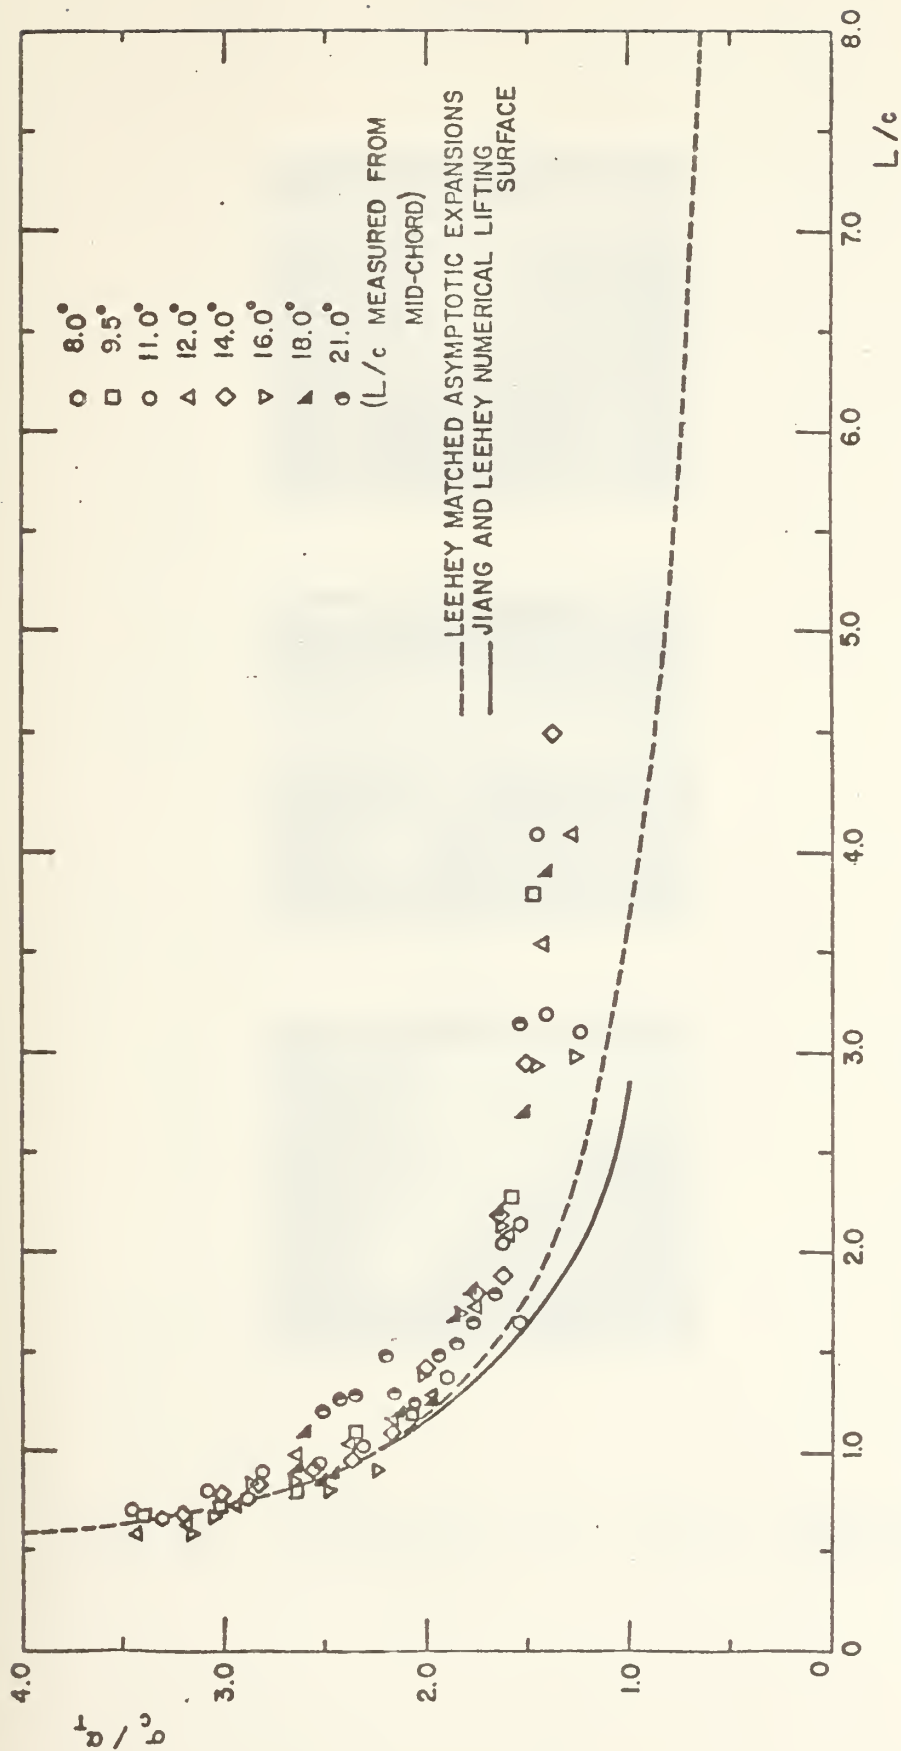


FIG. 30:  $\sigma_c / \alpha_T$  vs  $L/c$ , LARGE FOIL





(a) SMALL FOIL:  $\alpha = 12^\circ$ ,  $\sigma_c = .3545$ ,  $L/c = 1.3$

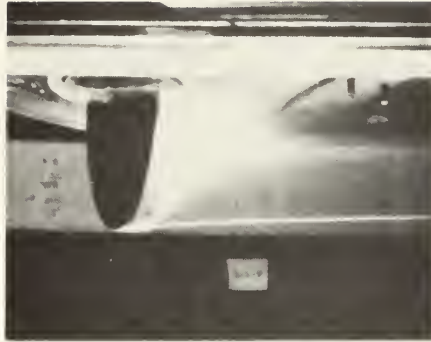

(b) MEDIUM FOIL:  $\alpha = 12^\circ$ ,  $\sigma_c = .3473$ ,  $L/c = 1.55$



(c) LARGE FOIL:  $\alpha = 12^\circ$ ,  $\sigma_c = .3265$ ,  $L/c = 2.1$

FIG. 31: COMPARISON OF CAVITY LENGTHS



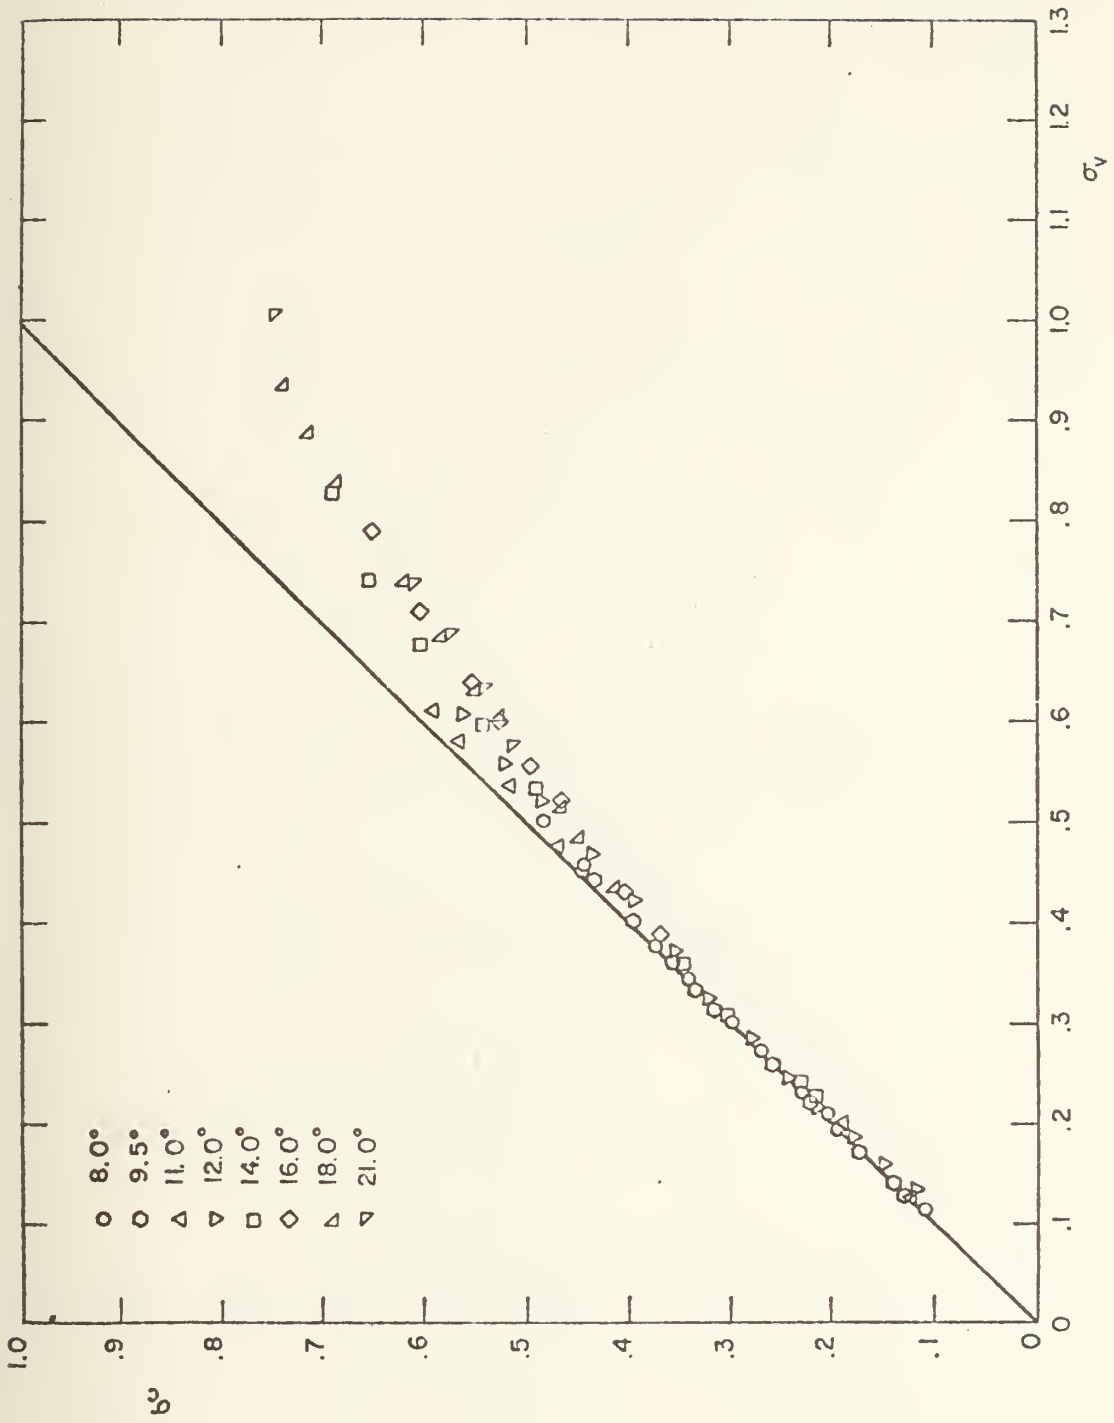


FIG. 32:  $\sigma_c$  vs  $\sigma_v$ , SMALL FOIL





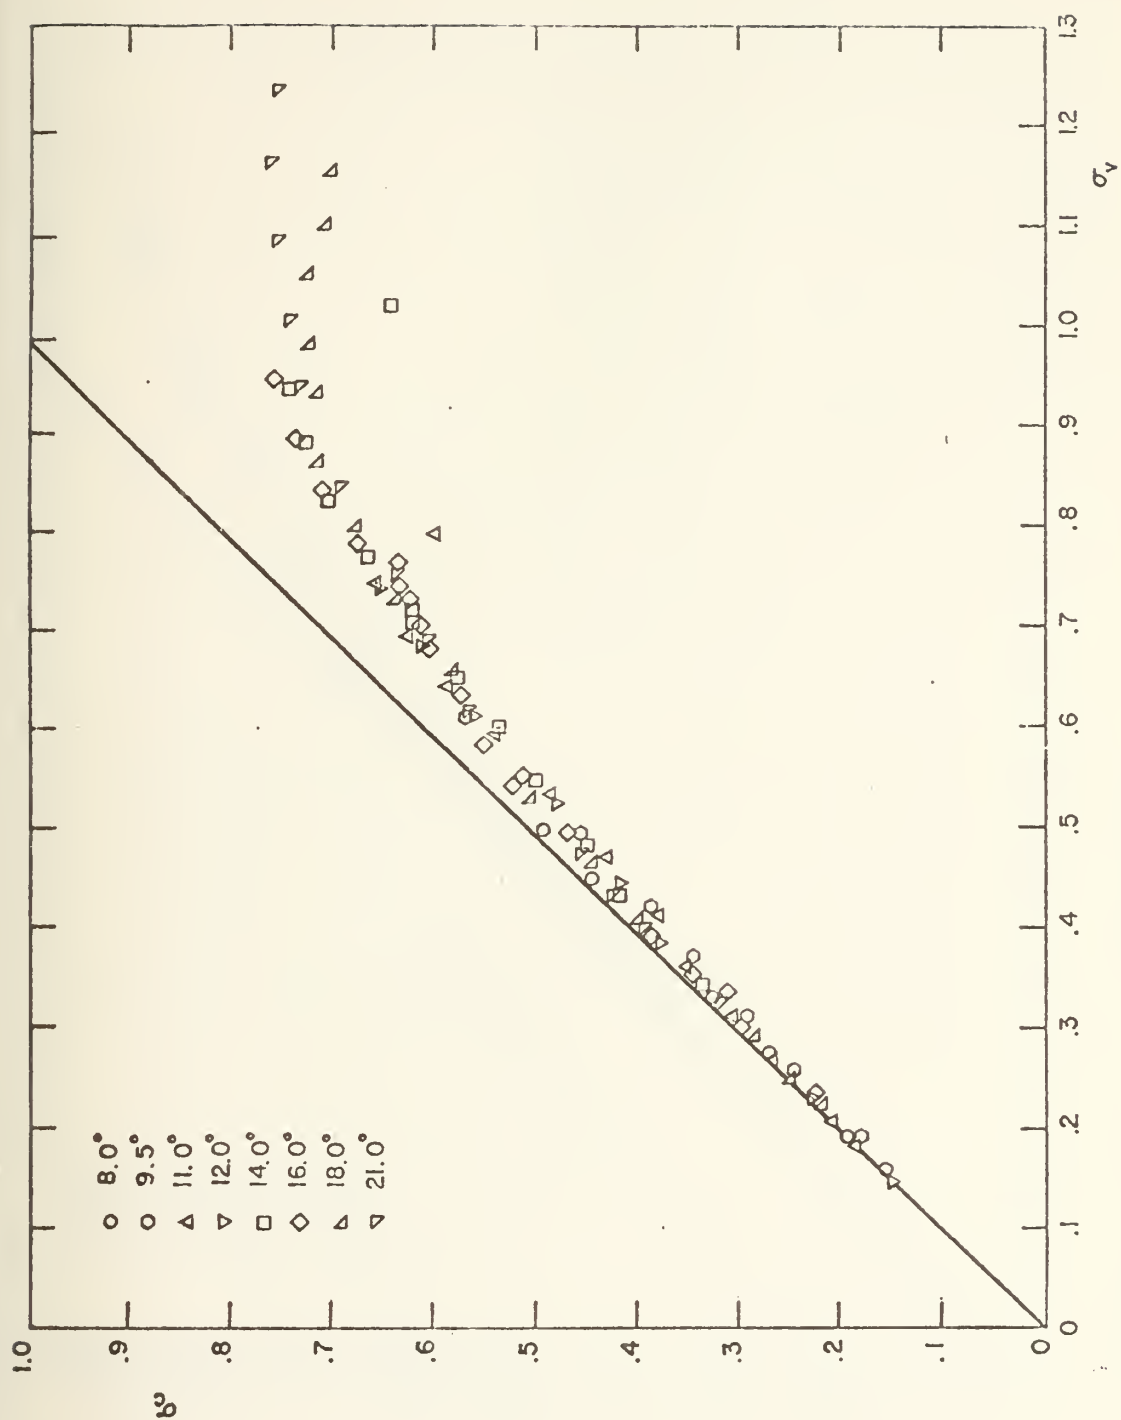


FIG. 33:  $\sigma_c$  vs  $\sigma_y$  , MEDIUM FOIL



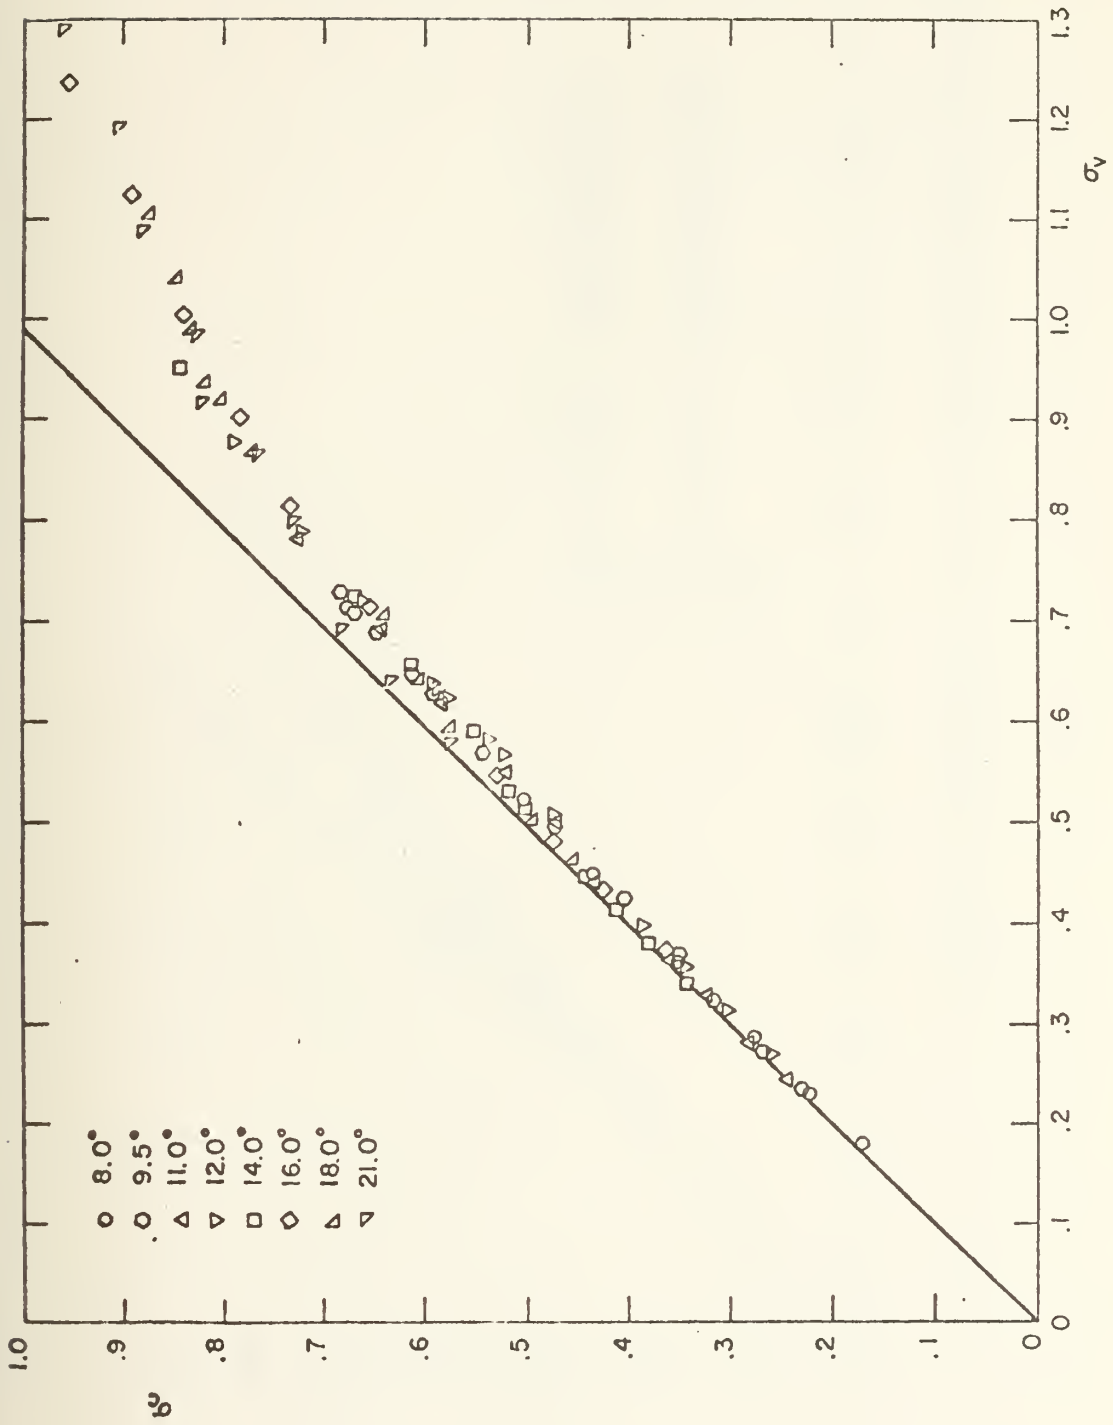


FIG. 34:  $\sigma_c$  vs  $\sigma_v$  , LARGE FOIL



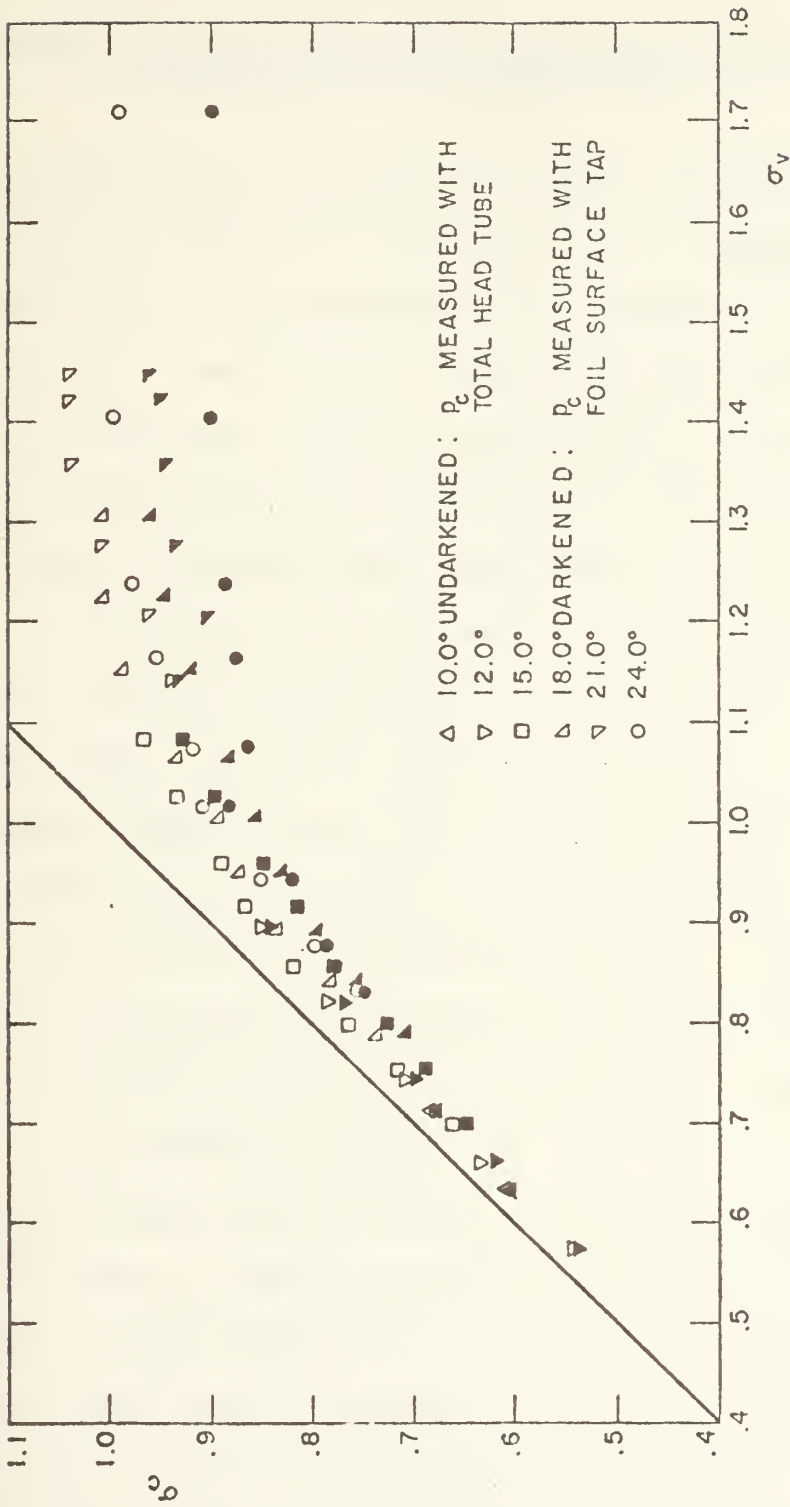


FIG.35:  $\sigma_c$  vs  $\sigma_v$ , LARGE FOIL: COMPARISON OF CAVITY PRESSURE MEASUREMENT TECHNIQUES



APPENDIX I

Standard Wind Tunnel Corrections for Effects of  
Images of Trailing Vortices

The experimental data shown in Figs. 4 through 30 are corrected for the apparent upwash due to the interference of the tunnel walls, in accordance with standard wind tunnel practice. The boundary condition of zero normal velocity at the tunnel walls is satisfied in the analytical treatment of the problem by introducing a doubly infinite system of image vortices; the interference due to the presence of the tunnel walls is then calculated to be the interference caused by the series of vortex images on the flow at the model. The net result is an additive correction to the induced drag and the angle of attack (to be perfectly correct, there is also a slight negative correction to the measured lift, but this is usually neglected). Upon application of the correction factor, the flow about the model is transformed to the flow which would be seen if the foil were in an infinite stream.

Since the hydrofoils tested in the square tunnel were only of half-span, a full-span model would require a duplex tunnel (that is, one whose ratio of height to width is  $1/2$ ). The ratio of model span to tunnel width for the small, medium, and large foils is  $1/4$ ,  $1/2$ , and  $3/4$ , respectively. Entering Fig. 6.34 of Pope and Harper [1],  $\delta$ , the tunnel correction





factor for the influence of the images of the trailing vortex system was found to be 0.126 for the small, 0.104 for the medium, and 0.092 for the large foil. If the ratio of the foil area to tunnel cross-sectional area is  $S/S_0$ , then the change in angle of attack is

$$\Delta\alpha_i = \delta \frac{S}{S_0} C_L. \quad (\text{radians}) \quad (\text{I-1})$$

The maximum value for  $\Delta\alpha_i$  encountered in the experiments was 1.47 degrees. When  $\Delta\alpha_i$  is added to the measured geometrical angle of attack,  $\alpha$ , the "true" angle of attack is obtained

$$\alpha_T = \alpha + \Delta\alpha_i. \quad (\text{I-2})$$

(In addition to the above correction, the data reduction program accounted for the dynamometer shaft twist, which never exceeded 0.06 degree.) The change in induced drag is

$$\begin{aligned} \Delta C_{D_i} &= \delta \frac{S}{S_0} C_L^2 \\ &= \Delta\alpha_i C_L \end{aligned} \quad (\text{I-3})$$

so that the total drag coefficient is

$$C_D = C_{D_{\text{uncor}}} + \Delta C_{D_i} \quad (\text{I-4})$$

where  $C_{D_{\text{uncor}}}$  is the uncorrected drag coefficient calculated from the raw experimental data.



## APPENDIX II

### Leehey's Matched Asymptotic Solution for Supercavitating Hydrofoils of Large Aspect Ratio

A synopsis of Leehey's theoretical results, as derived in references [9] and [11], is given.

Leehey's linearized steady-flow theory, which utilizes the method of matched asymptotic expansions, is valid to first order in angle of attack, and to second order in the reciprocal of the aspect ratio. Gravitational effects were neglected in the derivation. The analysis shows that the lift, drag, and moment coefficients, and non-dimensional cavity length (measured from midchord) are given by the following relationships:

$$C_L = \frac{\pi\alpha}{\sin\gamma(1+\sin\gamma)} \left\{ 1 - \frac{2\sin\gamma-1}{A(1+\sin\gamma)} \right\}, \quad (\text{II-1})$$

$$C_D = \alpha C_L = \frac{\pi\alpha^2}{\sin\gamma(1+\sin\gamma)} \left\{ 1 - \frac{2\sin\gamma-1}{A(1+\sin\gamma)} \right\}, \quad (\text{II-2})$$

$$C_M = \frac{-4\alpha}{\pi(1+\sin\gamma)^2} \left\{ 1 - \frac{1-2\sin\gamma+2\sin^2\gamma}{A \sin\gamma(1+\sin\gamma)} \right\}, \quad (\text{II-3})$$

and

$$L/c = \sec^2\gamma - 1/2 - \frac{8}{\pi\alpha A} \left( \frac{\alpha}{\sigma_c} \right)^2 C_{L_{2D}}, \quad (\text{II-4})$$

where  $C_{L_{2D}}$ , the two-dimensional lift coefficient may be expressed as



$$C_{L2D} = \frac{\pi\alpha}{\sin\gamma(1+\sin\gamma)}, \quad (\text{II-5})$$

and where

$$\gamma \equiv \arctan \left( \frac{2\alpha}{\sigma_c} \right), \quad (\text{II-6})$$

and

$$\sigma_c \equiv \frac{p_\infty - p_c}{(1/2)\rho U^2}. \quad (\text{II-7})$$

Experiments performed by Leehey and Stellingner [9] showed that the above predictions for lift and drag coefficients and for cavity lengths were good; it was evident from the experimental results, however, that lifting surface corrections would be needed to improve the moment coefficient prediction.



### APPENDIX III

#### Numerical Lifting Surface Theory for Supercavitating Hydrofoils of Finite Span

A brief description of the numerical lifting surface theory developed by Jiang and Leehey [12] for supercavitating hydrofoils of finite span will be given.

The steady flow theory is linearized for application to thin wings at small attack angles. Discrete sources and vortices are utilized in the representation of the physical model, and the coupled integral equations are reduced to a set of simultaneous algebraic equations. The cavity closure condition is applied stripwise on the cavity in an iterative process to obtain the desired cavitation number over the supercavitated planform.

This numerical theory should prove to be more accurate than the asymptotic theory of Leehey [11]; an implicit assumption in the latter theory is that the cavity length is less than the span, so that for small  $\sigma_c/\alpha$  (i.e., long cavities), the numerical theory should indeed give better predictions. It should be noted, also, that for the  $\sigma/\alpha_T = 1.0$  curves in Figs. 4, 5, 7, and 8 of reference [9], there is an ever-present difference between the experimental data and Leehey's asymptotic theoretical predictions for lift and drag coefficients. For long and short cavities, however, there is an even stronger disagreement between data





and Leehey's predictions for moment coefficient (Figs. 9 and 10 of reference [9]). The numerical lifting surface theory was developed in an attempt to overcome these difficulties.

The foil-cavity surface is collapsed to become a region in the (x-z) plane of the foil. The relationships for the jump in the tangential and normal components of the perturbation velocity upon crossing the foil surface and cavity projection surface are:

$$u(x, z, +0) - u(x, z, -0) = -\gamma(x, z), \quad (\text{III-1})$$

$$v(x, z, +0) - v(x, z, -0) = q(x, z), \quad (\text{III-2})$$

where  $\gamma$  and  $q$  are the vortex and source distributions, respectively. The boundary conditions are:

$$v(x, z, -0) = \frac{dy(x, z, -0)}{dx} \quad \begin{array}{l} \text{on the foil} \\ \text{wetted surface} \end{array} \quad (\text{III-3})$$

$$u = \sigma_c/2 \quad \begin{array}{l} \text{on the cavity} \\ \text{boundary} \end{array} \quad (\text{III-4})$$

$$\int_{x_\ell(z)}^{\ell(z)} q(\xi, z) d\xi = 0 \quad \begin{array}{l} \text{cavity closure} \\ \text{condition,} \end{array} \quad (\text{III-5})$$

where  $\ell(z)$  is the cavity length, measured from the leading edge as a function of spanwise position, and  $x_\ell(z)$  is the



chordwise coordinate of the leading edge as a function of spanwise position.

The discrete vortex and source method is utilized in the formulation of a series of simultaneous equations. Upon subdividing the projected surface into small elements, a discrete bound vortex, a trailing vortex, and a source are located within each of these elements. The bound vortex is situated on the quarter-chord line of each element, and induced velocities are calculated for all elements at their midspan, three-quarter chord positions. The concentrated source is taken to be a constant distribution across each element at its three-quarter chord position. The boundary condition of fixed cavity pressure is imposed on each element at its midspan, quarter-chord position. Utilizing these boundary conditions, the following equations are obtained:

$$\frac{1}{4\pi} \sum_{i,j} a_{ijkl} \frac{\gamma_{ij}}{\alpha} - \frac{1}{2} \frac{q_{kl}}{\alpha} = -1, \quad \begin{matrix} i = 1, \dots, M \\ j = 1, \dots, N \end{matrix} \quad (\text{III-6})$$

$$-\frac{\gamma_{kl}}{\alpha} + \frac{1}{2\pi} \sum_{i,j} b_{ijkl} \frac{q_{ij}}{\alpha} - \frac{\sigma_c}{\alpha} = 0, \quad \begin{matrix} i = 1, \dots, M \\ j = 1, \dots, N \\ \gamma_{kl} = 0 \text{ for } k > M \end{matrix} \quad (\text{III-7})$$

$$\sum_i \frac{q_{ij}}{\alpha} \Delta s_{ij} = 0, \quad j = 1, \dots, N, \quad (\text{III-8})$$

where  $a_{ijkl}$  and  $b_{ijkl}$  are the v and u velocities at the (k,l)



-th control point induced by the unit strength vortex and source at element  $(i,j)$ . For the  $(i,j)$ -th element,  $\Delta s_{ij}$  is the element length,  $\gamma_{ij}$  the discrete vortex strength, and  $q_{ij}$  the discrete source strength.  $M_1$  and  $N$  are the number of elements on the foil along the chord and span, respectively.  $M$  is the number of elements along the chord in the cavity.



APPENDIX IV

Data Reduction Program and Data Printout

Beginning on p. 82, a listing is given of the FORTRAN IV computer program utilized in the reduction of the experimental data.

The program output is also given, beginning on p. 92. For each foil at each angle of attack, a complete printout of the experimental data is given in raw form, with corrections for instrument tares, in reduced form, in nondimensional form without any corrections for wall effect, and finally in nondimensional form with corrections for the effects of the images of the trailing vortex system.





```

C MAINR SUPERCAVITATING HYDROFOIL DATA REDUCTION PROGRAM JUN 77, DERIVED
C FROM KERWIN/LEWIS/OPPENHEIM MK5 RUDDER DYNAMOMETER DATA REDUCTION PROGRAM
C JU 73 AND FROM STELLINGER PROGRAM JULY 74
  INTEGER RS,S,BLANK
  REAL MX,MXO,HYO,MZ,MZO,MFLAP,MAC,LDMAX,LDVAL,MY
  DIMENSION IDENT(24),ZM(2),ZI(7,2,2),ZF(2),NTAP(40),NFLD(40),ANOM(4
10),ANGL(40),S(40,7),R(40,7),DZI(7,2),CL(40),CD(40),CM(40),CPL(40),
2CY(40),CMF(40),VC(5),VE(6),FM(3),C(14),CLD(40),CLSQ(40),RN(40),SI(
340),CO(40),VKEEP(40),TT(2),RUNNBR(40,2),PINF(40),PCAV(40),TEMP(40)
4,CDL(40),SIGMAC(40),SIGMAV(40),SIGVOA(40),SIGCOA(40),CLOA(40),CDOA
5(40),NTAG(40),CHOA(40),CDOASQ(40)
  DIMENSION TAPS(40),CAVLEN(40),COMENT(40,3)
  DIMENSION A(15,4),RHS(4),ANGD(40)
  DATA KI/5/,KO/6/
  DATA IDENT(19)/,CL',/,IDENT(20)/,CD',/,IDENT(21)/,CM',/,IDENT(2
12)/,CMF',/,IDENT(23)/,CPL',/,IDENT(24)/,CY',/
  DATA VC/4.18934,2.60088,0.81646,0.6214,4.7381/,VE/-.49386,.5,.46526
1,0.50638,.5,1.0/,RS/,'R',/,BLANK/,'',/
  SIGMA(X1,X2,X3,X4)=(X2-X1)*288.*.01934/(X4*X3*X3)
  READ(KI,103) (IDENT(N),N=1,18)
103 FORMAT (18A4)
1 READ(KI,104) (C(N),N=1,14),TWIST,SHAFT,ANWAPA,DDDQ
104 FORMAT (7F10.5)
  READ(KI,100) DF,NRT,NTT,AREA,SPAN,MAC,XMAC,ZMAC,AZL,DYCOR,VELINC
100 FORMAT(F5.2,2I5,8F5.2)
  PUDGE=6.76
  DELTA=.092
  IF (SPAN.LT.9.) GO TO 86
  IF (SPAN.LT.14.) GO TO 85
  GO TO 88
85 PUDGE=10.71
  DELTA=.104
  GO TO 88
86 PUDGE=14.66
  DELTA=.126
88 IF (AREA.LE.0) GO TO 99

```



19SEP73

19SEP73

```

RHO=1.9574-0.00028*NTT
SCALE=1.000952-13.3E-6*NRT
PH(1)=1.474-.00071*NRT
PH(2)=24.5054-.00236*NRT
PH(3)=1.0
WRITE(KO,200) (IDENT(N),N=1,18)
200 FORMAT('1',1X,18A4//8X,' HYDROFOIL INPUT DATA' / 6X,'TR TT AREA
1SPAN MAC')
WRITE(KO,150)NRT,NTT,AREA,SPAN,MAC
150 FORMAT(4X,2I4,2F6.1,F6.2)
MYCOR=0
DYCOH=DYCOR
IF(DYCOR.LT.10.0) GO TO 30
DYCOH=99.
DYCOR=0.0
MYCOR=2
30 READ(KI,101) (ZM(K), (ZI(M,L,K),L=1,2),M=1,3),TT(K),K=1,2)
101 FORMAT(8F5.1)
WRITE(KO,201)
201 FORMAT(/,' ZERO READINGS AND TUNNEL TEMP BEFORE AND AFTER'/' MANO
1M 1-N 1-R 2-N 2-R 3-N 3-R TT')
WRITE(KO,204) (ZM(K), ((ZI(M,L,K),L=1,2),M=1,3), TT(K), K=1,2)
204 FORMAT(F4.0,1X,F5.1,1X,F5.1,1X,F5.1,1X,F5.1,1X,F5.1,1X,F5.
11)
DO 69 K=1,2
DO 69 L=1,2
DO 69 M=4,7
69 ZI(M,L,K)=0.0
WRITE(KO,212) (C(N),N=1,3),TWIST,SHAFT
212 FORMAT(' CELL LBS/CT(NORMAL/REV) #1='F7.5,' #2='F7.5,' #3='F7.
15/' TWIST='F7.1,' SHAFT DIA.='F5.2,'IN')
WRITE(KO,202)
202 FORMAT(25X,'**INPUT DATA AS RECORDED**'//
1' RUN NO MANOM S #1 S #2 S #3 PINF
2 PCAV')
DO 2 J=1,40

```



```

JT=J-1
READ (KI,102) (RUNNBR(J,N),N=1,2),NTAP(J),HFLD(J),ANOM(J),ANGL(J),(
1S(J,M),R(J,M),M=1,3),PINF(J),PCAV(J),NTAG(J),TAPS(J),CAVLEN(J),(CO
2MENT(J,M),N=1,3)
102 FORMAT(2A4,2X,2I1,2X,F6.0,1X,F4.1,3(2X,A1,1X,F7.1),2X,2F5.0,I3/A1,
1A4,3A4)
IF (ANOM(J).LE.0.0) GO TO 3
IF (NTAG(J).EQ.1) GO TO 444
IF (NTAG(J).EQ.2) GO TO 445
IF (NTAG(J).EQ.3) GO TO 446
WRITE(KO,203) (RUNNBR(J,N),N=1,2),TAPS(J),ANOM(J),(S(J,M),R(J,M),M=
11,3),PINF(J),PCAV(J)
203 FORMAT(1X,2A4,A1,4X,F5.0,4X,3(A1,F7.1,4X),2(F4.0,4X))
GO TO 2
444 WRITE(KO,944) (RUNNBR(J,N),N=1,2),TAPS(J),ANOM(J),(S(J,M),R(J,M),M=
11,3),PINF(J),PCAV(J)
944 FORMAT(1X,2A4,A1,4X,F5.0,4X,3(A1,F7.1,4X),2(F4.0,4X),'PC')
GO TO 2
445 WRITE(KO,945) (RUNNBR(J,N),N=1,2),TAPS(J),ANOM(J),(S(J,M),R(J,M),M=
11,3),PINF(J)
945 FORMAT(1X,2A4,A1,4X,F5.0,4X,3(A1,F7.1,4X),F4.0,4X,'-----',4X,'PC(TW
1)')
GO TO 2
446 WRITE(KO,946) (RUNNBR(J,N),N=1,2),TAPS(J),ANOM(J),(S(J,M),R(J,M),M=
11,3),PINF(J)
946 FORMAT(1X,2A4,A1,4X,F5.0,4X,3(A1,F7.1,4X),F4.0,4X,'-----',4X,'FW')
2 CONTINUE
GO TO 99
3 BUG=1.0/(JT-1)
WRITE(KO,938)
938 FORMAT(2X,'LEGEND',3X,'TR ROOM TEMPER (DEG FAHR)',20X,
1'LOAD CELL #1 LIFT (COUNTS)'/
211X,'TT TUNNEL "( " )',31X,
2'#2 MOMENT ABOUT MIDCHORD (COUNTS)'/
3 9X,'AREA HALF-SPAN MODEL PLANFORM AREA (SQ IN)',15X,
3'#3 DRAG (COUNTS)'/

```



```

4 9X,'SPAN POIL HALF-SPAN (IN)',31X,
4 PINF STATIC PRESSURE (MM HG)'/
510X,'MAC HEAD CHORD, HEAD. @ MODEL CENTROID(IN)',12X,
5 PCAV CAVITY PRESSURE (MM HG)'/
6 8X,'ANOM VELOCITY MANOMETER READING (MM)',17X,
6 RUN NO Q-XXX-YY: Q=POIL TESTED(S=SMALL,M=MED,L=LARGE)'/
7 8X,'TWIST SHAFT TWIST (DEGREES/IN-LB)',37X,
7 XXX=GEOMETRIC ATTACK ANGLE (DEGREES)'/
812X,'S LOAD CELL POLARITY(N=NORMAL,R=REVERSE)',27X,
8 YY=RUN NUMBER, THIS POIL @ THIS ANGLE'
DO 72 J=1,40
DO 72 M=4,7
S(J,M)=BLANK
R(J,M)=0.0
72 CONTINUE
DZM=(ZM(2)-ZM(1))*BUG
DZT=(TT(2)-TT(1))*BUG
DO 4 M=1,7
DO 4 L=1,2
DZI(M,L)=(ZI(M,L,2)-ZI(M,L,1))*BUG
DO 7 J=1,JT
IF(J.EQ.1) GO TO 6
IF(NTAP(J).EQ.0) NTAP(J)=NTAP(J-1)
IF(NFLD(J).EQ.0) NFLD(J)=NFLD(J-1)
BUG=J-1
TEMP(J)=TT(1)+BUG*DZT
PINF(J)=PINF(J)-PUFGE
ANOM(J)=ANOM(J)-ZM(1)-BUG*DZM
ANGL(J)=ANGL(J)-AZL
DO 7 M=1,7
IF(S(1,M).EQ.BLANK) GO TO 27
IF(S(J,M).EQ.BLANK) S(J,M)=S(J-1,M)
IF(S(J,M).EQ.RS) GO TO 8
R(J,M)=R(J,M)-ZI(M,1,1)-BUG*DZI(M,1)
GO TO 7
8 R(J,M)=-R(J,M)+ZI(M,2,1)+BUG*DZI(M,2)

```





```

GO TO 7
27 R(J,M)=R(J,M)-ZI(M,1,1)-DZI(M,1)*BUG
7 CONTINUE
WRITE(KO,205) (IDENT(N),N=1,18)
205 FORMAT('1',1X,18A4//)
WRITE(KO,705)
705 FORMAT(' INPUT DATA CORRECTED FOR ZERO READINGS, SIGNS, AND HYDROS
1TATIC PRESSURE',//, RUN NO HANOM #1 #2
2 #3 PINF PCAV')
DO 883 J=1,JT
IF (NTAG(J)-GT.1) GO TO 882
WRITE(KO,991) (RUNNR(J,N),N=1,2),ANOM(J), (R(J,M),M=1,3),PINF(J),P
1CAV(J)
991 FORMAT(1X,2A4,5X,F5.0,5X,2(F7.1,5X),F7.1,2(4X,F4.0))
GO TO 883
882 WRITE(KO,765) (RUNNR(J,M),N=1,2),ANOM(J), (R(J,M),M=1,3),PINF(J)
765 FORMAT(1X,2A4,5X,F5.0,5X,2(F7.1,5X),F7.1,4X,F4.0,4X,'-----')
883 CONTINUE
33 WRITE (KO,207) (IDENT(N),N=1,18)
207 FORMAT('1',1X,18A4//)
607 WRITE(KO,707)
707 FORMAT(15X,'**HYDROFOIL DATA REDUCTION**://
1, RUN NO ALPHA LIFT-LB DRAG-LB MOM-INLB VEL-FPS')
BEAR=MAC/(12*3.9739*EXP(67.6832/NTT))
DO 9 J=1,JT
I=NTAP(J)
IF(I.LT.1.OR.I.GT.6) GO TO 99
K=NFLD(J)
IF(K.LT.1.OR.K.GT.3) GO TO 99
BUG=VE(I)
IF(NTAP(J) .EQ. 6) V=.039*ANOM(J)+.0103*ANOM(J)*EXP(-ANOM(J)/50.0)
IF(NTAP(J).NE.6) V=(ANOM(J)*PM(K)*SCALE/(VC(I)*RHO))*BUG*
1(1.0+VELINC)
VKEEP(J)=V
PYHAFT=0.00327*SHAFT**2*V**2
FBOX1=C(1)*R(J,1)

```

19SEP73  
19SEP73

19SEP73  
19SEP73



```

IF (R(J,1) .LT. 0.0) FBOX1=C ( 8) *R(J,1)
FBOX2=C(2) *R(J,2)
IF (R(J,2) .LT. 0.0) FBOX2=C ( 9) *R(J,2)
FBOX3=C(3) *R(J,3)
IF (R(J,3) .LT. 0.0) FBOX3=C(10) *R(J,3)
FBOX4=C(4) *R(J,4) +PYHAPT*0.41477
IF (R(J,4) .LT. 0.0) FBOX4=C(11) *R(J,4)
FBOX5=C(5) *R(J,5) +PYHAPT*0.41477
IF (R(J,5) .LT. 0.0) FBOX5=C(12) *R(J,5)
FBOX6=C(6) *R(J,6) +PYHAPT*0.17045
IF (R(J,6) .LT. 0.0) FBOX6=C(13) *R(J,6)
PX=-FBOX3
PY=-FBOX4-FBOX5-FBOX6
FZ=-FBOX1-FBOX2
MX=4.725*(FBOX1+FBOX2)+6.062*(FBOX5-FBOX4)
MY=-18.0*FBOX2
MZ=17.034*FBOX6-4.725*FBOX3-3.5*(FBOX4+FBOX5)
RAT=(ANG(J) + AZL-DYCOR) * 0.0174532
RAT=0.0 FOR FIXED AXIS
RAT=0.0
SI(J)=SIN(RAT)
CO(J)=COS(RAT)
PXO=PX*CO(J)+FZ*SI(J)
PYO=PY
PZO=FZ*CO(J)-PX*SI(J)
MXO=MX*CO(J)+MZ*SI(J)
MYO=MY
MZO=MZ*CO(J)-MX*SI(J)
MPLAP=R(J,7)*C(7)
ANGD(J)=ANG(J)+MYO/TWIST
SIE=SIN(ANGD(J)*3.14159/180.)
COE=COS(ANGD(J)*3.14159/180.)
WRITE(KO,206) (RUNNBR(J,M),M=1,2),ANGD(J),FZO,PXO,MYO,V
206 FORMAT(1X,2A4,3X,F5.2,1X,F7.2,2X,F7.2,1X,F9.2,4X,F5.2)
RVS=0.5*RHO*AREA**2/144.0
SIE2=SIN(ANGD(J)*3.14159*0.5/180.)

```

C C



```

COE2=COE2(COE2(J)*3.14159*0.5/180.)
CL(J)=PZO/RVS+DDQ*SIE2*144.0/AREA
CLSQ(J)=CL(J)**2
RN(J)=V*BEAR
TAREA=AREA+4.*3.14159
RVSTAR=.5*RHO*TAREA*V**2/144.0
PRICTN=.0303*(RN(J)*1.E6)**(-1./7.)
FXO=FXO-RVSTAR*PRICTN
CD(J)=FXO/RVS-DDQ*COE2*144/AREA
CLD(J)=CL(J)/CD(J)
CDL(J)=CD(J)/CL(J)
CM(J)=MYO/RVS/MAC+(CL(J)*COE+CD(J)*SIE)*XMAC/MAC+(CL(J)*COE-CD(J)*
1SIE)*ZMAC/MAC
SIGMAV(J)=SIGMA(PV(TEMP(J)),PINF(J),V,RHO)
SIGHAC(J)=SIGMA(PCAV(J),PINF(J),V,RHO)
IF(MXO.NE.0.)GO TO 501
CPL(J)=0
GO TO 502
501 CONTINUE
CPL(J)=(MXO/PZO)/SPAN
502 CONTINUE
CY(J)=PYO/RVS
9 CMF(J)=-MFLAP/RVS/MAC
WRITE(KO,939)
939 FORMAT('0',1X,'LEGEND',8X,'VEL UPSTREAM VELOCITY (U)')
WRITE(KO,208)(IDENT(N),N=1,18)
208 FORMAT('1',1X,18A4//)
608 WRITE(KO,708)
708 FORMAT(5X,'**HYDROFOIL DATA IN NONDIMENSIONAL FORM (NO CORRECTION
1S APPLIED)**//' RUN NO ALPHA CL CDUNC CM
2 L/D D/L RN*10**-6')
WRITE(KO,209)((RUNNR(J,M),M=1,2),ANGD(J),CL(J),CD(J),CM(J),CLD(J)
1,CDL(J),RN(J),J=1,JT)
209 FORMAT(1X,2A4,2X,P5.2,3X,P6.4,4X,P6.4,4X,P7.4,4X,P6.4,4X,P10.
14)
DO 15 J=1,JT

```

19SEP73

19SEP73  
19SEP73



```

ANGD (J)=ANGD (J) +DELTA*180.*AREA*CL (J) / (400.*3.14159)
CD (J)=CD (J) +DELTA*AREA*CL (J) *CL (J) /400.
SIGVOA (J)=SIGNAV (J) *180./ (ANGD (J) *3.14159)
SIGCOA (J)=SIGNAC (J) *180./ (ANGD (J) *3.14159)
CLOA (J)=CL (J) *180./ (ANGD (J) *3.14159)
CDOA (J)=CD (J) *180./ (ANGD (J) *3.14159)
CDL (J)=CD (J) /CL (J)
CMOA (J)=CM (J) *180./ (ANGD (J) *3.14159)
CDOASQ (J)=CDOA (J) *180./ (ANGD (J) *3.14159)
15 CLD (J)=CL (J) /CD (J)
   WRITE (KO,940)
940 FORMAT ('0',1X,'LEGEND',5X,'ALPHA GEOMETRIC ANGLE OF ATTACK CORRECT
   ED FOR SHAFT TWIST',/
216X,'CL LIFT COEFFICIENT, NONDIMENSIONALIZED ON UPSTREAM VELOCITY
3AND MODEL PLANFORM AREA',/
413X,'CDUNC CD(UNCORRECTED), THE UNCORRECTED DRAG COEFFICIENT AS C
5OMPUTED FROM MEASURED DRAG, AND NONDIMENSIONALIZED',/
619X,'ON UPSTREAM VELOCITY AND MODEL PLANFORM AREA',/
716X,'CM MOMENT COEFFICIENT, NONDIMENSIONALIZED ON UPSTREAM VELOCIT
8Y, MODEL PLANFORM AREA, AND MEAN CHORD',/
915X,'L/D LIFT-TO-DRAG RATIO = CL/CDUNC',/
115X,'D/L DRAG-TO-LIFT RATIO = CDUNC/CL',/
216X,'RN REYNOLDS NUMBER, BASED ON MEAN CHORD')
   WRITE (KO,211) (IDENT(N),N=1,18)
211 FORMAT ('1',1X,18A4//)
611 WRITE (KO,711)
711 FORMAT (23X,'**PRIOR DATA CORRECTED FOR EFFECTS OF TRAIL
1ING VORTEX SYSTEM**',/
2' RUN NO ALPHAT CL CD CM (D/L) SIGV/AT SIGC/AT CL/A
3T CD/AT2 CM/AT SIGV SIGC CAVLTH COMMENTS/REMARKS')
DO 63 J=1,JT
IF (NTAG (J).EQ.1) GO TO 787
IF (NTAG (J).EQ.2) GO TO 788
IF (NTAG (J).EQ.3) GO TO 789
WRITE (KO,963) (RUNNBR (J,M),M=1,2),TAPS (J),ANGD (J),CL (J),CD (J),CM (J)
1,CDL (J),SIGVOA (J),SIGCOA (J),CLOA (J),CDOASQ (J),CMOA (J),SIGNAV (J),SI

```

19SEP73  
19SEP73





```

2GMAC (J),CAVLEN(J), (COMENT(J,N),N=1,3)
963 FORMAT(1X,2A4,A1,1X,F5.2,5(2X,F5.3),1X,4(2X,F5.3),1X,2(F5.3,2X),1X
1,A4,10X,3A4)
GO TO 63

787 WRITE(KO,387) (RUNNBR(J,M),M=1,2),TAPS(J),ANGD(J),CL(J),CD(J),CM(J)
1,CDL(J),SIGVOA(J),SIGCOA(J),CLOA(J),CDOASQ(J),CMOA(J),CAVLEN(J),SI
2GMAC(J),CAVLEN(J), (COMENT(J,N),N=1,3)
387 FORMAT(1X,2A4,A1,1X,F5.2,5(2X,F5.3),1X,4(2X,F5.3),1X,2(F5.3,2X),1X
1,A4,' PC',6X,3A4)
GO TO 63

788 WRITE(KO,388) (RUNNBR(J,M),M=1,2),TAPS(J),ANGD(J),CL(J),CD(J),CM(J)
1,CDL(J),CLOA(J),CDOASQ(J),CMOA(J),CAVLEN(J), (COMENT(J,N),N=1,3)
388 FORMAT(1X,2A4,A1,1X,F5.2,4(2X,F5.3),2X,'-----',3X,'-----',3(2X,F5.
13),1X,'-----',2X,'-----',3X,A4,' PC(TW) ',3A4)
GO TO 63

789 WRITE(KO,389) (RUNNBR(J,M),M=1,2),TAPS(J),ANGD(J),CL(J),CD(J),CM(J)
1,CDL(J),CLOA(J),CDOASQ(J),CMOA(J),CAVLEN(J), (COMENT(J,N),N=1,3)
389 FORMAT(1X,2A4,A1,1X,F5.2,4(2X,F5.3),2X,'-----',3X,'-----',3(2X,F5.
13),1X,'-----',2X,'-----',3X,A4,' FW',6X,3A4)
63 CONTINUE
WRITE(KO,439)
439 FORMAT('0',1X,'UNLESS OTHERWISE INDICATED, ALL DATA ARE FOR:'/19X,
1'1. SUPERCAVITATING FLOW.'/19X,'2. BOTH STATIC PRESSURE TAPS OPE
2N.'/1X,' LEGEND',10X,'+ ONLY UPSTREAM STATIC PRESSURE TAP UTILIZE
3D.'/18X,'* ONLY DNSTREAM STATIC PRESSURE TAP UTILIZED.'/17X,'PC PART
4IALLY CAVITATING.'/13X,'PC(TW) PARTIALLY CAVITATING (TAP WETTED) '.'/
517X,'FW FULLY WETTED
68X,'AT (ALPHAT) (TRUE) ANGLE OF ATTACK, CORRECTED FOR EFFECTS OF I
7MAGES OF TRAILING VORTICES.'/16X,'AT2 ALPHAT**2.'/
815X,'SIGC CAVITATION NUMBER COMPUTED WITH MEASURED CAVITY PRESSURE
9.'/15X,'SIGV CAVITATION NUMBER COMPUTED WITH CALCULATED VAPOR PRESS
1URE'./
217X,'CD DRAG COEFFICIENT, CORRECTED FOR EFFECTS OF IMAGES OF TRAIL
3ING VORTICES'./
414X,'(D/L) CORRECTED DRAG-TO-LIFT RATIO = CD/CL'./
513X,'CAVLTH CAVITY LENGTH MEASURED FROM MIDCHORD AT CENTROID POSIT

```



6ION, NONDIMENSIONALIZED ON MEAN CHORD./  
720X, (OBTAINED FROM PHOTOGRAPHS)')  
GO TO 1  
STOP  
END

```

FUNCTION PV(T)
  GIVES VAPOR PRESSURE IN MMHG FOR TEMPERATURES BETWEEN 50 AND 300 DEGREES F
  (SEE EQUATION (2) ON PAGE 151 OF 'THE VAPOR PRESSURE OF WATER:
  PART II: STEAM RESEARCH PROGRAM,' BY SMITH, KEYES, AND GERRY IN
  THE PROC. AM. AC. ARTS & SCI., VOL 69, 1934, P. 137, REFERENCE (10))
  DEG=(5.*(T-32.)/9.)+273.16
  X=647.27-DEG
  A=3.2438+(5.8682E-3)*X+(1.1702E-8)*X*X*X
  B=1.+(2.1878E-3)*X
  POOP=X*A/(DEG*B)
  CRUD=218.167/(10.**FOOP)
  PV=14.6959*CRUD/.01934
  RETURN
END

```



## HYDROFOIL INPUT DATA

TR	TT	AREA	SPAN	HAC
79	96	10.0	5.0	2.01

# ZERO READINGS AND TUNNEL TEMP BEFORE AND AFTER

HAZON	1-B	1-R	2-B	2-R	3-B	3-R	TT
0.	0.0	0.0	0.0	100.0	0.0	100.0	94.6
0.	0.0	0.0	0.0	99.5	0.0	101.0	97.0

CELL LBS/CT (NORMAL/REV) #1=0.10000 #2=0.02090 #3=0.03030  
 TWIST= 7200.0 SKAPT DIA.= 1.50IN

\*\*\*INPUT DATA AS RECORDED\*\*\*

RUN NO	MANOM	S	#1	S	#2	S	#3	PINP	PCAV
S-8.0-01	1439.	-234.0	R	111.2	R	218.0		194.	PC
S-8.0-02+	1433.	-219.0	R	111.1	R	219.0		194.	PC
S-8.0-03	1422.	-216.0	R	110.4	R	219.0		181.	PC
S-8.0-04+	1420.	-200.0	R	109.2	R	213.0		169.	PC
S-8.0-05	1404.	-180.0	R	108.3	R	207.0		158.	PC
S-8.0-06	1397.	-160.0	R	107.8	R	200.0		149.	PC
S-8.0-07	1400.	-142.0	R	107.5	R	191.0		138.	PC
S-8.0-08	1392.	-128.0	R	107.3	R	182.0		130.	PC
S-8.0-09	1385.	-112.0	R	106.9	R	174.0		119.	PC
S-8.0-10	1391.	-100.0	R	106.4	R	166.0		110.	PC
S-8.0-11+	1397.	-86.0	R	106.1	R	158.0		100.	PC
S-8.0-12	1440.	-74.0	R	105.1	R	150.0		90.	PC
S-8.0-13	1218.	-90.0	R	105.1	R	160.0		108.	PC
S-8.0-14	953.	-74.0	R	104.6	R	150.0		99.	PC
S-8.0-15	957.	-68.0	R	104.7	R	144.0		99.	PC

LOAD CELL #1 LIPT (COUNTS)

#2 MOMENT ABOUT MIDCHORD (COUNTS)

#3 DRAG (COUNTS)

PINP STATIC PRESSURE (MM HG)

PCAV CAVITY PRESSURE (MM HG)

I=UN NO Q-III-YY: Q=POIL TESTED(S=SMALL,M=MED,L=LARGE)

XXX=GEOMETRIC ATTACK ANGLE (DEGREES)

YY=RUN NUMBER, THIS POIL @ THIS ANGLE

LEGEND

TR ROOM TEMPER (DEG FAHR)

TT TUNNEL " (" "

AREA HALF-SPAN MODEL PLANFORM AREA (SQ IN)

SPAN FOIL HALF-SPAN (IN)

HAC REAR CHORD, REAS. @ MODEL CENTROID (IN)

MANOM VELOCITY MANOMETER READING (MM)

TWIST SHAFT TWIST (DEGREES/IN-LB)

S LOAD CELL POLARITY (N=NORMAL, R=REVERSE)

LOAD CELL #1	LIFT (COUNTS)	#2	MOMENT ABOUT MIDCHORD (COUNTS)
1	100	1	100
2	200	2	200
3	300	3	300
4	400	4	400
5	500	5	500
6	600	6	600
7	700	7	700
8	800	8	800
9	900	9	900
10	1000	10	1000
11	1100	11	1100
12	1200	12	1200
13	1300	13	1300
14	1400	14	1400
15	1500	15	1500
16	1600	16	1600
17	1700	17	1700
18	1800	18	1800
19	1900	19	1900
20	2000	20	2000
21	2100	21	2100
22	2200	22	2200
23	2300	23	2300
24	2400	24	2400
25	2500	25	2500
26	2600	26	2600
27	2700	27	2700
28	2800	28	2800
29	2900	29	2900
30	3000	30	3000
31	3100	31	3100
32	3200	32	3200
33	3300	33	3300
34	3400	34	3400
35	3500	35	3500
36	3600	36	3600
37	3700	37	3700
38	3800	38	3800
39	3900	39	3900
40	4000	40	4000
41	4100	41	4100
42	4200	42	4200
43	4300	43	4300
44	4400	44	4400
45	4500	45	4500
46	4600	46	4600
47	4700	47	4700
48	4800	48	4800
49	4900	49	4900
50	5000	50	5000
51	5100	51	5100
52	5200	52	5200
53	5300	53	5300
54	5400	54	5400
55	5500	55	5500
56	5600	56	5600
57	5700	57	5700
58	5800	58	5800
59	5900	59	5900
60	6000	60	6000
61	6100	61	6100
62	6200	62	6200
63	6300	63	6300
64	6400	64	6400
65	6500	65	6500
66	6600	66	6600
67	6700	67	6700
68	6800	68	6800
69	6900	69	6900
70	7000	70	7000
71	7100	71	7100
72	7200	72	7200
73	7300	73	7300
74	7400	74	7400
75	7500	75	7500
76	7600	76	7600
77	7700	77	7700
78	7800	78	7800
79	7900	79	7900
80	8000	80	8000
81	8100	81	8100
82	8200	82	8200
83	8300	83	8300
84	8400	84	8400
85	8500	85	8500
86	8600	86	8600
87	8700	87	8700
88	8800	88	8800
89	8900	89	8900
90	9000	90	9000
91	9100	91	9100
92	9200	92	9200
93	9300	93	9300
94	9400	94	9400
95	9500	95	

TT TUNNEL " ( " " )

AREA HALF-SPAN MODEL PLATFORM AREA (SQ IN)

SPAN FOIL HALF-SPAN (IN)

MAC MEAN CHOR. MEAS. 2 MODEL CENTR

ANOM VELOCITY MANOMETER READING (MM)

SHAFT TWIST (DEGREES/IN-LB)

LOAD CELL POLARITY (N=NORMAL, R=REVERSE)



INPUT DATA CORRECTED FOR ZERO HEADINGS, SIGNS, AND HYDROSTATIC PRESSURE

RUE NO	HABON	#1	#2	#3	PINF	PCAV
S-8-0-01	1439.	-234.0	-11.2	-118.0	179.	47.
S-8-0-02	1433.	-230.0	-11.1	-118.9	179.	46.
S-8-0-03	1422.	-216.0	-10.5	-118.9	166.	45.
S-8-0-04	1420.	-200.0	-9.3	-112.8	154.	44.
S-8-0-05	1404.	-180.0	-8.4	-106.7	143.	44.
S-8-0-06	1397.	-160.0	-8.0	-99.6	134.	44.
S-8-0-07	1400.	-142.0	-7.7	-90.6	123.	44.
S-8-0-08	1392.	-128.0	-7.6	-81.5	115.	44.
S-8-0-09	1385.	-112.0	-7.2	-73.4	104.	44.
S-8-0-10	1391.	-100.0	-6.7	-65.4	95.	44.
S-8-0-11	1397.	-86.0	-6.5	-57.3	85.	45.
S-8-0-12	1440.	-74.0	-5.5	-49.2	75.	46.
S-8-0-13	1218.	-90.0	-5.5	-59.1	93.	46.
S-8-0-14	953.	-74.0	-5.1	-49.1	84.	46.
S-8-0-15	957.	-68.0	-5.2	-43.0	84.	46.





EXPER INVES OF WALL EFFECTS ON SUPERCavitating HYDROFOILS OF FINITE SPAN

••HYDROFOIL DATA REDUCTION••

RUN NO	ALPHA	LIFT-LB	DRAG-LB	MOB-INLB	VEL-PPS
S-8.0-01	8.00	23.63	4.76	4.21	28.05
S-8.0-02	8.00	23.23	4.79	4.19	27.99
S-8.0-03	8.00	21.82	4.79	3.94	27.89
S-8.0-04	8.00	20.19	4.55	3.50	27.88
S-8.0-05	8.00	18.18	4.30	3.18	27.73
S-8.0-06	8.00	16.17	4.02	3.00	27.66
S-8.0-07	8.00	14.36	3.65	2.90	27.69
S-8.0-08	8.00	12.96	3.28	2.84	27.62
S-8.0-09	8.00	11.35	2.96	2.70	27.55
S-8.0-10	8.00	10.14	2.63	2.53	27.61
S-8.0-11	8.00	8.73	2.31	2.43	27.66
S-8.0-12	8.00	7.51	1.98	2.07	28.06
S-8.0-13	8.00	9.12	2.38	2.08	25.96
S-8.0-14	8.00	7.51	1.98	1.91	23.16
S-8.0-15	8.00	6.91	1.73	1.96	23.20

LEGEND VEL UPSTREAM VELOCITY (U)



\*\*HYDROFOIL DATA IN NONDIMENSIONAL FORM (NO CORRECTIONS APPLIED)\*\*

RUN NO	ALPHA	CL	CDUNC	CH	L/D	D/L	RE*10**6
S-8.0-01	8.00	0.8482	0.0799	0.0397	5.6080	0.1783	0.5841
S-8.0-02	8.00	0.8423	0.0810	0.0397	5.4617	0.1831	0.5830
S-8.0-03	8.00	0.8183	0.0816	0.0376	5.1285	0.1950	0.5809
S-8.0-04	8.00	0.8877	0.0770	0.0334	5.0355	0.1986	0.5805
S-8.0-05	8.00	0.3527	0.0732	0.0307	4.8201	0.2075	0.5775
S-8.0-06	8.00	0.3151	0.0680	0.0291	4.6346	0.2158	0.5762
S-8.0-07	8.00	0.2794	0.0607	0.0281	4.6005	0.2174	0.5767
S-8.0-08	8.00	0.2534	0.0540	0.0276	4.6970	0.2129	0.5752
S-8.0-09	8.00	0.2230	0.0479	0.0264	4.6599	0.2146	0.5738
S-8.0-10	8.00	0.1985	0.0413	0.0246	4.8094	0.2079	0.5750
S-8.0-11	8.00	0.1703	0.0347	0.0236	4.9038	0.2039	0.5762
S-8.0-12	8.00	0.1424	0.0273	0.0195	5.2115	0.1919	0.5843
S-8.0-13	8.00	0.2019	0.0424	0.0229	4.7601	0.2101	0.5405
S-8.0-14	8.00	0.2088	0.0445	0.0264	4.6952	0.2130	0.4822
S-8.0-15	8.00	0.1915	0.0375	0.0270	5.1078	0.1958	0.4832

LEGEND

ALPHA GEOMETRIC ANGLE OF ATTACK CORRECTED FOR SHAFT TWIST  
 CL LIFT COEFFICIENT, NONDIMENSIONALIZED ON UPSTREAM VELOCITY AND MODEL PLATFORM AREA  
 CDUNC CD(UNCORRECTED), THE UNCORRECTED DRAG COEFFICIENT AS COMPUTED FROM MEASURED DRAG, AND NONDIMENSIONALIZED ON UPSTREAM VELOCITY AND MODEL PLATFORM AREA  
 CH MOMENT COEFFICIENT, NONDIMENSIONALIZED ON UPSTREAM VELOCITY, MODEL PLATFORM AREA, AND MEAN CHORD  
 L/D LIFT-TO-DRAG RATIO = CL/CDUNC  
 D/L DRAG-TO-LIFT RATIO = CDUNC/CL  
 RE REYNOLDS NUMBER, BASED ON MEAN CHORD



\*\*\*PRIOR DATA CORRECTED FOR EFFECTS OF IMAGES OF TRAILING VORTEX SYSTEM\*\*

ROW NO	ALPHAT	CL	CD	CM	(D/L)	SIGV/AT	SIGC/AT	CL/AT	CD/AT2	CM/AT	SIGV	SIGC	CAVLTH	COMMENTS/REMARKS
S-8-0-01	8.08	0.448	0.081	0.040	0.180	3.580	3.441	3.177	4.089	0.282	0.505	0.485	0.68	PC
S-8-0-02+	8.08	0.442	0.082	0.040	0.184	3.589	3.481	3.136	4.102	0.281	0.506	0.491	---	PC
S-8-0-03	8.08	0.418	0.082	0.038	0.196	3.269	3.192	2.968	4.133	0.267	0.461	0.450	0.78	PC
S-8-0-04+	8.07	0.388	0.077	0.033	0.200	2.953	2.909	2.752	3.904	0.237	0.416	0.410	0.78	PC
S-8-0-05	8.06	0.353	0.074	0.031	0.209	2.688	2.648	2.506	3.713	0.218	0.378	0.371	0.86	PC
S-8-0-06	8.06	0.315	0.068	0.029	0.217	2.455	2.422	2.241	3.454	0.207	0.345	0.341	0.96	PC
S-8-0-07	8.05	0.279	0.061	0.028	0.218	2.152	2.124	1.988	3.088	0.200	0.302	0.298	1.05	PC
S-8-0-08	8.05	0.253	0.054	0.028	0.214	1.943	1.921	1.805	2.746	0.197	0.273	0.270	1.25	PC
S-8-0-09	8.04	0.223	0.048	0.026	0.215	1.649	1.634	1.589	2.438	0.188	0.231	0.229	1.40	PC
S-8-0-10	8.04	0.198	0.041	0.025	0.209	1.395	1.385	1.415	2.104	0.176	0.196	0.194	1.70	PC
S-8-0-11+	8.03	0.170	0.035	0.024	0.204	1.115	1.085	1.215	1.772	0.168	0.156	0.152	2.50	PC
S-8-0-12	8.03	0.142	0.027	0.019	0.192	0.817	0.768	1.017	1.396	0.139	0.114	0.108	6.60	PC
S-8-0-13	8.04	0.202	0.043	0.023	0.211	1.496	1.445	1.439	2.162	0.163	0.210	0.203	1.65	PC
S-8-0-14	8.04	0.209	0.045	0.026	0.214	1.525	1.471	1.489	2.267	0.188	0.214	0.206	1.60	PC
S-8-0-15	8.03	0.191	0.038	0.027	0.196	1.511	1.465	1.365	1.912	0.192	0.212	0.206	---	PC

QUESTIONABLE

UNLESS OTHERWISE INDICATED, ALL DATA ARE FOR:

1. SUPERCavitating FLOW.
2. BOTH STATIC PRESSURE TAPS OPEN.

LEGEND

- + ONLY UPSTREAM STATIC PRESSURE TAP UTILIZED
- \* ONLY DOWNSTREAM STATIC PRESSURE TAP UTILIZED
- PC PARTIALLY CAVITATING
- PC(TW) PARTIALLY CAVITATING (TAP WETTED)
- FW FULLY WETTED
- AT (ALPHAT) (TRUE) ANGLE OF ATTACK, CORRECTED FOR EFFECTS OF IMAGES OF TRAILING VORTICES
- AT2 ALPHAT\*\*2
- SIGC CAVITATION NUMBER COMPUTED WITH MEASURED CAVITY PRESSURE
- SIGV CAVITATION NUMBER COMPUTED WITH CALCULATED VAPOR PRESSURE
- CD DRAG COEFFICIENT, CORRECTED FOR EFFECTS OF IMAGES OF TRAILING VORTICES
- (D/L) CORRECTED DRAG-TO-LIFT RATIO = CD/CL
- CAVLTH CAVITY LENGTH MEASURED FROM MIDCHORD AT CENTROID POSITION, NONDIMENSIONALIZED ON MEAN CHORD (OBTAINED FROM PHOTOGRAPHS)



EXPER INVES OF WALL EFFECTS ON SUPERCAVITATING HYDROFOILS OF FINITE SPAN

HYDROFOIL INPUT DATA

TR TT AREA SPAN MAC  
75 91 10.0 5.0 2.01

ZERO READINGS AND TUNNEL TEMP BEFORE AND AFTER

HANON 1-N 1-R 2-E 2-R 3-N 3-R TT  
0. 0.0 0.0 0.0 100.0 0.0 100.0 90.0  
0. 0.0 0.0 0.0 98.0 0.0 101.0 92.0  
CELL LBS/CT(NORMAL/REV) #1=0.10000 #2=0.02090 #3=0.04030  
TWIST= 7200.0 SHAFT DIA.= 1.50IN  
\*\*INPUT DATA AS RECORDED\*\*

RUN NO	HANON	S	#1	S	#2	S	#3	PINF	PCAV
S-9-5-01	1429.	-298.0	R	122.0	R	235.0	R	189.	39.
S-9-5-02+	1427.	-298.0	R	121.9	R	234.0	R	188.	39.
S-9-5-03	1420.	-272.0	R	120.3	R	232.0	R	171.	39.
S-9-5-04+	1406.	-270.0	R	119.0	R	229.0	R	173.	39.
S-9-5-05	1400.	-252.0	R	119.0	R	225.0	R	159.	39.
S-9-5-06	1399.	-228.0	R	117.8	R	220.0	R	148.	39.
S-9-5-07	1394.	-202.0	R	117.0	R	210.0	R	136.	38.
S-9-5-08	1390.	-176.0	R	116.3	R	200.0	R	121.	38.
S-9-5-09	1385.	-154.0	R	114.8	R	188.0	R	111.	38.
S-9-5-10	1385.	-132.0	R	113.8	R	176.0	R	99.	38.
S-9-5-11+	1394.	-126.0	R	113.2	R	173.0	R	99.	38.
S-9-5-12	1404.	-114.0	R	112.8	R	169.0	R	90.	38.
S-9-5-13	1407.	-110.0	R	111.9	R	163.0	R	87.	38.
S-9-5-14	940.	-150.0	R	112.2	R	180.0	R	115.	40.
S-9-5-15	1213.	-178.0	R	114.7	R	199.0	R	126.	40.

LOAD CELL #1 LIFT (COUNTS) #2 MOMENT ABOUT MIDCHORD (COUNTS) #3 DRAG (COUNTS)  
PINF STATIC PRESSURE (MM HG) PCAV CAVITY PRESSURE (MM HG)  
NUM NO Q-XII-YY: Q=FOIL TESTED(S=SMALL,R=RED,L=LARGE)  
XIX=GEOMETRIC ATTACK ANGLE (DEGREES)  
YY=RUN NUMBER, THIS POIL @ THIS ANGLE

LEGEND TR ROOM TEMPER (DEG FAHR)

TT TUNNEL " ( " " )  
AREA HALF-SPAN MODEL PLANFORM AREA (SQ IN)  
SPAN FOIL HALF-SPAN (IN)  
RAC REAR CHORD, MEAS. @ MODEL CENTROID (IN)  
HANON VELOCITY METER READING (MM)  
TWIST SHAFT TWIST (DEGREES/IN-LB)  
S LOAD CELL POLARITY (N=NORMAL,R=REVERSE)





INPUT DATA CORRECTED FOR ZERO READINGS, SIGNS, AND HYDROSTATIC PRESSURE

RUN NO	MASON	#1	#2	#3	PINF	PCAV
S-9.5-01	1429.	-298.0	-22.0	-135.0	174.	39.
S-9.5-02	1427.	-298.0	-22.0	-133.9	173.	39.
S-9.5-03	1420.	-272.0	-20.6	-131.9	156.	39.
S-9.5-04	1406.	-270.0	-19.4	-128.8	158.	39.
S-9.5-05	1400.	-252.0	-19.6	-124.7	144.	39.
S-9.5-06	1399.	-228.0	-18.5	-119.6	133.	39.
S-9.5-07	1394.	-202.0	-17.9	-109.6	121.	38.
S-9.5-08	1390.	-176.0	-17.3	-99.5	106.	38.
S-9.5-09	1385.	-154.0	-15.9	-87.4	96.	38.
S-9.5-10	1385.	-132.0	-15.1	-75.4	84.	38.
S-9.5-11	1394.	-126.0	-14.6	-72.3	84.	38.
S-9.5-12	1404.	-114.0	-14.4	-68.2	75.	38.
S-9.5-13	1407.	-110.0	-13.6	-62.1	72.	38.
S-9.5-14	940.	-150.0	-14.1	-79.1	100.	40.
S-9.5-15	1213.	-178.0	-16.7	-97.0	111.	40.



EXPER INVES OF WALL EFFECTS ON SUPERCAVITATING HYDROFOILS OF FINITE SPAN

\*\*HYDROFOIL DATA REDUCTION\*\*

RUN NO	ALPHA	LIFT-LB	DRAG-LB	MOB-INLB	VEL-FPS
S-9.5-01	9.50	30.26	5.48	8.28	27.98
S-9.5-02	9.50	30.26	5.40	8.29	27.96
S-9.5-03	9.50	27.63	5.31	7.74	27.89
S-9.5-04	9.50	27.41	5.19	7.31	27.76
S-9.5-05	9.50	25.61	5.03	7.36	27.71
S-9.5-06	9.50	23.19	4.82	6.97	27.70
S-9.5-07	9.50	20.57	4.42	6.72	27.65
S-9.5-08	9.50	17.96	4.01	6.51	27.62
S-9.5-09	9.50	15.73	3.52	6.00	27.57
S-9.5-10	9.50	13.52	3.04	5.68	27.57
S-9.5-11	9.50	12.91	2.91	5.50	27.65
S-9.5-12	9.50	11.70	2.75	5.41	27.75
S-9.5-13	9.50	11.28	2.50	5.12	27.77
S-9.5-14	9.50	15.29	3.19	5.29	23.02
S-9.5-15	9.50	18.15	3.91	6.28	25.92

LEGEND                      VEL UPSTREAM VELOCITY (U)



••HYDROFOIL DATA IN NONDIMENSIONAL FORM (NO CORRECTIONS APPLIED)••

RUN NO	ALPHA	CL	CDUNC	CM	L/D	D/L	RE*10**-6
S-9.5-01	9.50	0.5764	0.0933	0.0784	6.1771	0.1619	0.5605
S-9.5-02	9.50	0.5772	0.0926	0.0787	6.2314	0.1605	0.5601
S-9.5-03	9.50	0.5294	0.0915	0.0738	5.7864	0.1728	0.5588
S-9.5-04	9.50	0.5300	0.0900	0.0703	5.8864	0.1699	0.5563
S-9.5-05	9.50	0.4972	0.0872	0.0711	5.6989	0.1755	0.5552
S-9.5-06	9.50	0.4505	0.0833	0.0673	5.4053	0.1850	0.5550
S-9.5-07	9.50	0.4010	0.0757	0.0651	5.2950	0.1889	0.5540
S-9.5-08	9.50	0.3511	0.0680	0.0633	5.1601	0.1938	0.5533
S-9.5-09	9.50	0.3085	0.0588	0.0595	5.2514	0.1904	0.5524
S-9.5-10	9.50	0.2650	0.0492	0.0554	5.3855	0.1857	0.5524
S-9.5-11	9.50	0.2516	0.0464	0.0534	5.4162	0.1846	0.5540
S-9.5-12	9.50	0.2266	0.0429	0.0521	5.2813	0.1893	0.5559
S-9.5-13	9.50	0.2181	0.0381	0.0492	5.7288	0.1746	0.5564
S-9.5-14	9.50	0.4302	0.0790	0.0740	5.4440	0.1837	0.4612
S-9.5-15	9.50	0.4027	0.0763	0.0693	5.2777	0.1895	0.5193

LEGEND

ALPHA GEOMETRIC ANGLE OF ATTACK CORRECTED FOR SHAFT TWIST

CL LIFT COEFFICIENT, NONDIMENSIONALIZED ON UPSTREAM VELOCITY AND MODEL PLANFORM AREA

CDUNC CD(UNCORRECTED), THE UNCORRECTED DRAG COEFFICIENT AS COMPUTED FROM MEASURED DRAG, AND NONDIMENSIONALIZED ON UPSTREAM VELOCITY AND MODEL PLANFORM AREA

CM MOMENT COEFFICIENT, NONDIMENSIONALIZED ON UPSTREAM VELOCITY, MODEL PLANFORM AREA, AND MEAN CHORD

L/D LIFT-TO-DRAG RATIO = CL/CDUNC

D/L DRAG-TO-LIFT RATIO = CDUNC/CL

RE REYNOLDS NUMBER, BASED ON MEAN CHORD



EXPER INVES OF WALL EFFECTS ON SUPERCavitating HYDROPOILS OF FINITE SPAN

••PRIOR DATA CORRECTED FOR EFFECTS OF IMAGES OF TRAILING VORTEX SYSTEM••

RUN NO	ALPHAT	CL	CD	CH	(D/L)	SIGV/AT	SIGC/AT	CL/AT	CD/AT2	CH/AT	SIGV	SIGC	CAVLTH	COMMENTS/REMARKS
S-9.5-01	9.61	0.576	0.094	0.078	0.164	3.038	2.974	3.438	3.357	0.468	0.509	0.499	0.68	
S-9.5-02+	9.61	0.577	0.094	0.079	0.162	3.016	2.956	3.443	3.333	0.469	0.506	0.496	---	
S-9.5-03	9.60	0.529	0.092	0.074	0.174	2.653	2.596	3.161	3.293	0.441	0.444	0.435	0.70	
S-9.5-04+	9.60	0.530	0.091	0.070	0.172	2.719	2.665	3.164	3.241	0.420	0.455	0.446	---	
S-9.5-05	9.59	0.497	0.088	0.071	0.177	2.413	2.363	2.970	3.142	0.425	0.404	0.396	0.80	
S-9.5-06	9.58	0.450	0.084	0.067	0.186	2.166	2.120	2.694	3.002	0.403	0.362	0.354	0.83	
S-9.5-07	9.57	0.401	0.076	0.065	0.190	1.901	1.880	2.400	2.731	0.390	0.318	0.314	0.95	
S-9.5-08	9.56	0.351	0.068	0.063	0.195	1.565	1.548	2.103	2.455	0.379	0.261	0.258	1.30	
S-9.5-09	9.56	0.309	0.059	0.059	0.191	1.340	1.327	1.850	2.123	0.351	0.224	0.221	1.60	
S-9.5-10	9.55	0.265	0.049	0.055	0.187	1.064	1.055	1.590	1.780	0.332	0.177	0.176	1.75	
S-9.5-11+	9.55	0.252	0.047	0.053	0.185	1.054	1.049	1.510	1.680	0.320	0.176	0.175	2.80	
S-9.5-12	9.54	0.227	0.043	0.052	0.190	0.842	0.840	1.360	1.553	0.313	0.140	0.140	3.65	
S-9.5-13	9.54	0.218	0.038	0.049	0.175	0.769	0.771	1.310	1.378	0.296	0.128	0.128	4.15	
S-9.5-14	9.58	0.430	0.080	0.074	0.185	2.020	1.963	2.573	2.848	0.443	0.338	0.328	0.90	
S-9.5-15	9.57	0.403	0.077	0.069	0.191	1.872	1.832	2.410	2.751	0.415	0.313	0.306	1.00	

UNLESS OTHERWISE INDICATED, ALL DATA ARE FOR:

1. SUPERCavitating FLOW.
2. BOTH STATIC PRESSURE TAPS OPEN.

LEGEND

+ ONLY UPSTREAM STATIC PRESSURE TAP UTILIZED

\* ONLY DNSTREAM STATIC PRESSURE TAP UTILIZED

PC PARTIALLY CAVITATING

PC(TH) PARTIALLY CAVITATING (TAP WETTED)

FW FULLY WETTED

AT (ALPHAT) (TRUE) ANGLE OF ATTACK, CORRECTED FOR EFFECTS OF IMAGES OF TRAILING VORTICES

AT2 ALPHAT\*2

SIGC CAVITATION NUMBER COMPUTED WITH MEASURED CAVITY PRESSURE

SIGV CAVITATION NUMBER COMPUTED WITH CALCULATED VAPOR PRESSURE

CD DRAG COEFFICIENT, CORRECTED FOR EFFECTS OF IMAGES OF TRAILING VORTICES

(D/L) CORRECTED DRAG-TO-LIFT RATIO = CD/CL

CAVLTH CAVITY LENGTH MEASURED FROM MIDCHORD AT CENTROID POSITION, NONDIMENSIONALIZED ON MEAN CHORD (OBTAINED FROM PHOTOGRAPHS)





EXPER INVES OF HALL EFFECTS ON SUPERCavitating HYDROFOILS OF FINITE SPAN

HYDROFOIL INPUT DATA

TR TT AREA SPAN MAC  
75 89 10.0 5.0 2.01

ZERO READINGS AND TUNNEL TEMP BEFORE AND AFTER

BAROM 1-M 1-E 2-E 3-W 3-B TT

0. 0.0 0.0 0.0 100.0 0.0 100.0 87.0  
0. 0.0 0.0 0.0 110.5 0.0 108.0 90.0

CELL LBS/CT(NORMAL/REV) #1=0.10000 #2=0.02090 #3=0.04030

THWIST= 7203.0 SHAFT DIA.= 1.50IN

\*\*INPUT DATA AS RECORDED\*\*

RUN NO	BAROM	S	#1	S	#2	S	#3	PINF	PCAV
S-11-01	1338.	-350.0	R	128.2	R	260.0	201.	39.	
S-11-02+	1340.	-348.0	R	127.9	R	260.0	204.	39.	
S-11-03	1333.	-338.0	R	127.0	R	260.0	197.	38.	
S-11-04+	1335.	-336.0	R	126.6	R	260.0	197.	39.	
S-11-05	1328.	-318.0	R	125.1	R	258.0	185.	39.	
S-11-06+	1330.	-312.0	R	125.0	R	257.0	185.	39.	
S-11-07	1327.	-290.0	R	124.0	R	250.0	170.	36.	
S-11-08+	1324.	-284.0	R	123.5	R	250.0	171.	36.	
S-11-09+	1325.	-252.0	R	122.5	R	240.0	151.	36.	
S-11-10	1324.	-258.0	R	122.5	R	241.0	155.	36.	
S-11-11+	1323.	-218.0	R	121.2	R	229.0	136.	36.	
S-11-12	1323.	-212.0	R	120.9	R	226.0	137.	37.	
S-11-13+	1323.	-182.0	R	120.2	R	213.0	120.	36.	
S-11-14	1319.	-176.0	R	119.6	R	210.0	119.	36.	
S-11-15+	1323.	-160.0	R	119.0	R	200.0	110.	37.	
S-11-16	1318.	-154.0	R	118.7	R	198.0	110.	36.	
S-11-17+	1320.	-146.0	R	118.4	R	192.0	100.	36.	
S-11-18	1323.	-138.0	R	118.0	R	187.0	101.	36.	
S-11-19+	1320.	-142.0	R	118.0	R	188.0	100.	37.	
S-11-20	1323.	-132.0	R	117.8	R	184.0	90.	37.	
S-11-21+	1333.	-126.0	R	117.5	R	180.0	90.	36.	
S-11-22	1370.	-116.0	R	116.5	R	174.0	84.	37.	
S-11-23+	1365.	-114.0	R	116.1	R	175.0	85.	40.	

LOAD CELL #1 LIPT (COUNTS)

#2 MOMENT ABOUT MIDCHORD (COUNTS)

#3 DRAG (COUNTS)

PINF STATIC PRESSURE (MM HG)

PCAV CAVITY PRESSURE (MM HG)

RUN NO Q-III-YY: Q-FOIL TESTED(S=SHALL,N=NED,L=LARGE)

XX-GEOMETRIC ATTACK ANGLE (DEGREES)

YY=RUN NUMBER, THIS FOIL @ THIS ANGLE

AREA HALF-SPAN MODEL PLANFORM AREA (SQ IN)

SPAN FOIL HALF-SPAN (IN)

HAC BEAM CHORD, MEAS. @ MODEL CENTROID(IN)

BAROM VELOCITY MANOMETER READING (MM)

THWIST SHAP TWIST (DEGREES/IN-LB)

S LOAD CELL POLARITY(N=NORMAL, R=REVERSE)

TR ROOM TEMPER (DEG FAHR)

TT TUNNEL " " "



INPUT DATA CORRECTED FOR ZERO READINGS, SIGNS, AND HYDROSTATIC PRESSURE

RUN NO	BARON	#1	#2	#3	PINP	PCAV
S-11-01	1338.	-350.0	-28.2	-160.0	189.	39.
S-11-02	1340.	-348.0	-27.4	-159.8	189.	39.
S-11-03	1333.	-338.0	-26.0	-159.6	182.	38.
S-11-04	1335.	-336.0	-25.2	-159.5	182.	39.
S-11-05	1328.	-318.0	-23.2	-157.3	170.	39.
S-11-06	1330.	-312.0	-22.6	-156.1	170.	39.
S-11-07	1327.	-290.0	-21.1	-148.9	155.	36.
S-11-08	1324.	-284.0	-20.2	-148.7	156.	36.
S-11-09	1325.	-252.0	-18.7	-138.5	140.	36.
S-11-10	1324.	-258.0	-18.2	-139.4	140.	36.
S-11-11	1323.	-218.0	-16.4	-127.2	121.	36.
S-11-12	1323.	-212.0	-15.6	-124.0	122.	37.
S-11-13	1323.	-182.0	-14.5	-110.8	105.	36.
S-11-14	1319.	-176.0	-13.4	-107.6	104.	36.
S-11-15	1323.	-160.0	-12.3	-97.5	95.	37.
S-11-16	1318.	-154.0	-11.5	-95.3	95.	36.
S-11-17	1320.	-146.0	-10.8	-89.1	85.	36.
S-11-18	1323.	-138.0	-9.9	-83.9	86.	36.
S-11-19	1320.	-142.0	-9.4	-84.7	85.	37.
S-11-20	1323.	-132.0	-8.7	-80.5	75.	37.
S-11-21	1333.	-126.0	-8.0	-76.4	75.	36.
S-11-22	1370.	-116.0	-6.5	-70.2	69.	37.
S-11-23	1365.	-114.0	-5.6	-71.0	70.	40.



EXPER INVES OF WALL EFFECTS ON SUPERCAVITATING HYDROFOILS OF FINITE SPAN

\*\*HYDROFOIL DATA REDUCTION\*\*

RUN NO	ALPHA	LIFT-LB	DRAG-LB	ROB-INLB	VEL-PPS
S-11.-01	11.00	35.59	6.45	10.61	27.13
S-11.-02	11.00	35.37	6.44	10.32	27.15
S-11.-03	11.00	34.34	6.43	9.80	27.08
S-11.-04	11.00	34.13	6.43	9.47	27.10
S-11.-05	11.00	32.28	6.34	8.72	27.03
S-11.-06	11.00	31.67	6.29	8.51	27.05
S-11.-07	11.00	29.34	6.00	7.95	27.02
S-11.-08	11.00	28.82	5.99	7.58	27.00
S-11.-09	11.00	25.59	5.58	7.03	27.01
S-11.-10	11.00	26.18	5.62	6.85	27.00
S-11.-11	11.00	22.14	5.13	6.18	26.99
S-11.-12	11.00	21.53	5.00	5.89	26.99
S-11.-13	11.00	18.50	4.47	5.44	26.99
S-11.-14	11.00	17.88	4.34	5.04	26.95
S-11.-15	11.00	16.26	3.93	4.63	26.99
S-11.-16	11.00	15.54	3.84	4.34	26.94
S-11.-17	11.00	14.82	3.59	4.05	26.96
S-11.-18	11.00	14.01	3.38	3.72	26.99
S-11.-19	11.00	14.40	3.41	3.54	26.96
S-11.-20	11.00	13.38	3.25	3.28	26.99
S-11.-21	11.00	12.77	3.08	2.99	27.08
S-11.-22	11.00	11.74	2.83	2.44	27.43
S-11.-23	11.00	11.52	2.86	2.11	27.38

LEGEND VEL UPSTREAM VELOCITY (U)



\*\*\*HYDROFOIL DATA IN NONDIMENSIONAL FORM (NO CORRECTIONS APPLIED)\*\*\*

RUN NO	ALPHA	CL	CDUNC	CH	L/D	D/L	RE*10**-6
S-11.-01	11.00	0.7207	0.1202	0.1069	5.9966	0.1660	0.5305
S-11.-02	11.00	0.7153	0.1199	0.1038	5.9682	0.1676	0.5349
S-11.-03	11.00	0.6979	0.1203	0.0991	5.7995	0.1724	0.5336
S-11.-04	11.00	0.6925	0.1200	0.0956	5.7705	0.1733	0.5339
S-11.-05	11.00	0.6584	0.1189	0.0885	5.5393	0.1805	0.5326
S-11.-06	11.00	0.6450	0.1177	0.0862	5.4797	0.1825	0.5330
S-11.-07	11.00	0.6038	0.1121	0.0807	5.3612	0.1865	0.5324
S-11.-08	11.00	0.5894	0.1122	0.0772	5.2543	0.1903	0.5319
S-11.-09	11.00	0.5229	0.1037	0.0715	5.0428	0.1983	0.5321
S-11.-10	11.00	0.5354	0.1045	0.0697	5.1255	0.1951	0.5319
S-11.-11	11.00	0.4531	0.0945	0.0629	4.7957	0.2085	0.5317
S-11.-12	11.00	0.4405	0.0919	0.0599	4.7954	0.2085	0.5317
S-11.-13	11.00	0.3786	0.0810	0.0554	4.6749	0.2139	0.5317
S-11.-14	11.00	0.3669	0.0766	0.0515	4.6672	0.2143	0.5310
S-11.-15	11.00	0.3327	0.0700	0.0472	4.7546	0.2103	0.5317
S-11.-16	11.00	0.3212	0.0684	0.0444	4.6928	0.2131	0.5308
S-11.-17	11.00	0.3040	0.0632	0.0413	4.8082	0.2080	0.5311
S-11.-18	11.00	0.2866	0.0588	0.0379	4.8745	0.2051	0.5317
S-11.-19	11.00	0.2952	0.0596	0.0361	4.9517	0.2019	0.5311
S-11.-20	11.00	0.2739	0.0560	0.0334	4.8879	0.2046	0.5317
S-11.-21	11.00	0.2594	0.0521	0.0303	4.9751	0.2010	0.5336
S-11.-22	11.00	0.2325	0.0457	0.0240	5.0920	0.1964	0.5404
S-11.-23	11.00	0.2289	0.0465	0.0208	4.9233	0.2031	0.5395

LEGEND

ALPHA GEOMETRIC ANGLE OF ATTACK CORRECTED FOR SHAFT TWIST

CL LIFT COEFFICIENT, NONDIMENSIONALIZED ON UPSTREAM VELOCITY AND MODEL PLANFORM AREA  
CDUNC CD (UNCORRECTED), THE UNCORRECTED DRAG COEFFICIENT AS COMPUTED FROM MEASURED DRAG, AND NONDIMENSIONALIZED ON UPSTREAM VELOCITY AND MODEL PLANFORM AREA

CH MOMENT COEFFICIENT, NONDIMENSIONALIZED ON UPSTREAM VELOCITY, MODEL PLANFORM AREA, AND MEAN CHORD

L/D LIFT-TO-DRAG RATIO = CL/CDUNC

D/L DRAG-TO-LIFT RATIO = CDUNC/CL

RE REYNOLDS NUMBER, BASED ON MEAN CHORD





\*\*\*PRIOR DATA CORRECTED FOR EFFECTS OF IMAGES OF TRAILING VORTEX SYSTEM\*\*\*

RUN NO	ALPHAT	CL	CD	CH	(D/L)	SIGV/AT	SIGC/AT	CL/AT	CD/AT2	CH/AT	SIGV	SIGC	CAVLTH	COMMENTS/REMARKS
S-11-01	11.13	0.721	0.122	0.107	0.169	3.155	3.031	3.710	3.227	0.550	0.613	0.589	0.73	
S-11-02+	11.13	0.715	0.121	0.104	0.170	3.148	3.027	3.682	3.219	0.534	0.612	0.588	---	
S-11-03	11.13	0.698	0.122	0.099	0.175	3.020	2.921	3.594	3.231	0.510	0.586	0.567	0.78	
S-11-04+	11.13	0.693	0.122	0.096	0.175	3.013	2.897	3.566	3.223	0.492	0.585	0.563	---	
S-11-05	11.12	0.658	0.120	0.089	0.183	2.783	2.669	3.392	3.192	0.456	0.540	0.518	0.81	
S-11-06+	11.12	0.645	0.119	0.086	0.185	2.776	2.666	3.324	3.161	0.444	0.539	0.517	---	
S-11-07	11.11	0.601	0.113	0.081	0.188	2.476	2.429	3.099	3.011	0.416	0.480	0.471	0.88	
S-11-08+	11.11	0.589	0.113	0.077	0.192	2.499	2.455	3.040	3.014	0.398	0.484	0.476	---	
S-11-09+	11.10	0.523	0.105	0.071	0.200	2.170	2.129	2.700	2.788	0.369	0.420	0.412	1.08	
S-11-10	11.10	0.535	0.105	0.070	0.197	2.169	2.131	2.764	2.808	0.360	0.420	0.413	---	
S-11-11+	11.08	0.453	0.095	0.063	0.210	1.781	1.746	2.343	2.543	0.325	0.345	0.338	1.25	
S-11-12	11.08	0.441	0.092	0.060	0.215	1.799	1.747	2.278	2.473	0.310	0.348	0.338	---	
S-11-13+	11.07	0.379	0.081	0.055	0.215	1.450	1.421	1.960	2.182	0.287	0.280	0.274	1.90	
S-11-14	11.07	0.367	0.079	0.051	0.215	1.430	1.404	1.900	2.119	0.266	0.276	0.271	---	
S-11-15+	11.06	0.333	0.070	0.047	0.211	1.240	1.196	1.723	1.887	0.244	0.239	0.231	2.00	
S-11-16	11.06	0.321	0.069	0.044	0.214	1.241	1.221	1.664	1.846	0.230	0.240	0.236	---	
S-11-17+	11.06	0.304	0.064	0.041	0.209	1.031	1.014	1.576	1.706	0.214	0.199	0.196	2.40	
S-11-18	11.05	0.287	0.059	0.038	0.206	1.047	1.033	1.486	1.587	0.196	0.202	0.199	---	
S-11-19+	11.05	0.295	0.060	0.036	0.203	1.025	0.994	1.530	1.609	0.187	0.198	0.192	2.50	
S-11-20	11.05	0.274	0.056	0.033	0.205	0.815	0.787	1.420	1.513	0.173	0.157	0.152	2.85	
S-11-21+	11.05	0.259	0.052	0.030	0.202	0.806	0.802	1.345	1.408	0.157	0.155	0.155	---	
S-11-22	11.04	0.232	0.046	0.024	0.197	0.664	0.643	1.206	1.234	0.125	0.128	0.124	4.60	
S-11-23+	11.04	0.229	0.047	0.021	0.204	0.683	0.605	1.188	1.257	0.108	0.132	0.117	---	

QUESTIONABLE

UNLESS OTHERWISE INDICATED, ALL DATA ARE FOR:

1. SUPERCAVITATING FLOW.
2. BOTH STATIC PRESSURE TAPS OPEN.

LEGEND

\* ONLY UPSTREAM STATIC PRESSURE TAP UTILIZED

\* ONLY DNSTREAM STATIC PRESSURE TAP UTILIZED

PC PARTIALLY CAVITATING

PC(TW) PARTIALLY CAVITATING (TAP WETTED)

FW FULLY WETTED

AT (ALPHAT) (TRUE) ANGLE OF ATTACK, CORRECTED FOR EFFECTS OF IMAGES OF TRAILING VORTICES

AT2 ALPHAT\*\*2

SIGC CAVITATION NUMBER COMPUTED WITH MEASURED CAVITY PRESSURE

SIGV CAVITATION NUMBER COMPUTED WITH CALCULATED VAPOR PRESSURE

CD DRAG COEFFICIENT, CORRECTED FOR EFFECTS OF IMAGES OF TRAILING VORTICES

(D/L) CORRECTED DRAG-TO-LIFT RATIO = CD/CL

CAVLTH CAVITY LENGTH MEASURED FROM MIDCHORD AT CENTROID POSITION, NONDIMENSIONALIZED ON MEAN CHORD (OBTAINED FROM PHOTOGRAPHS)



HYDROFOIL INPUT DATA  
 TR TT AREA SPAN MAC  
 77 89 10.0 5.0 2.01

ZERO READINGS AND TUNNEL TEMP BEFORE AND AFTER

MANON 1-M 1-R 2-M 2-R 3-M 3-R IT  
 0. -8.0 0.0 0.0 100.0 0.0 100.0 88.0  
 0. -10.0 0.0 0.0 99.3 0.0 106.0 90.0  
 CELL LBS/CT (NORMAL/REV) #1=0.10000 #2=0.02090 #3=0.04030  
 TWIST= 7200.0 SHAFT DIA.= 1.50IN

\*\*INPUT DATA AS RECORDED\*\*

RUN NO	MANON	S	#1	S	#2	S	#3	PINF	PCAV
S-12.-01	1284.		-354.0	R	122.0	R	282.0	199.	46.
S-12.-02+	1281.		-356.0	R	121.5	R	282.0	199.	45.
S-12.-03	1286.		-332.0	R	120.6	R	279.0	187.	44.
S-12.-04	1287.		-312.0	R	119.8	R	275.0	178.	44.
S-12.-05	1286.		-284.0	R	119.0	R	266.0	165.	43.
S-12.-06	1286.		-260.0	R	118.4	R	257.0	154.	42.
S-12.-07	1289.		-230.0	R	117.6	R	242.0	141.	39.
S-12.-08	1238.		-206.0	R	116.9	R	232.0	130.	36.
S-12.-09	1233.		-192.0	R	115.9	R	223.0	119.	36.
S-12.-10	1279.		-170.0	R	115.3	R	211.0	110.	36.
S-12.-11	1287.		-158.0	R	114.4	R	203.0	103.	36.
S-12.-12+	1286.		-152.0	R	114.3	R	200.0	103.	36.
S-12.-13	1289.		-144.0	R	114.1	R	194.0	96.	37.
S-12.-14	1297.		-138.0	R	113.5	R	188.0	90.	39.
S-12.-15	1317.		-130.0	R	112.9	R	184.0	83.	39.
S-12.-16	1288.		-340.0	R	134.0	R	250.0	662.	---
S-12.-17	1281.		-182.0	R	115.9	R	219.0	118.	38.
S-12.-18	839.		-140.0	R	111.2	R	188.0	102.	38.
S-12.-19	420.		-78.0	R	106.2	R	148.0	91.	48.
S-12.-20	419.		-130.0	R	110.0	R	155.0	769.	---

LOAD CELL #1 LIPT (COUNTS)  
 #2 MOMENT ABOUT MIDCHORD (COUNTS)  
 #3 DRAG (COUNTS)  
 PINF STATIC PRESSURE (MM HG)  
 PCAV CAVITY PRESSURE (MM HG)  
 RUN NO Q-XXX-YY: Q=FOIL TESTED(S=SMALL,M=MED,L=LARGE)  
 YYY=GEOMETRIC ATTACK ANGLE (DEGREES)  
 YY=RUN NUMBER, THIS FOIL @ THIS ANGLE

TR ROOM TEMPER (DEG FAHR)

TT TUNNEL " ( " " )

AREA HALF-SPAN MODEL PLANFORM AREA (SQ IN)

SPAN POIL HALF-SPAN (IN)

MAC MEAN CHORD, MEAS. @ MODEL CENTROID (IN)

MANON VELOCITY MANOMETER READING (MM)

TWIST SHAFT TWIST (DEGREES/IN-LB)

S LOAD CELL POLARITY(N=NORMAL,R=REVERSE)

LEGEND



EXPER INVES OF WALL EFFECTS ON SUPERCAVITATING HYDROFOILS OF FINITE SPAN

INPUT DATA CORRECTED FOR ZERO READINGS, SIGNS, AND HYDROSTATIC PRESSURE

RUN NO	ANOM	#1	#2	#3	PINF	PCAV
S-12.-01	1284.	-346.0	-22.0	-182.0	184.	46.
S-12.-02	1281.	-347.9	-21.5	-181.7	184.	45.
S-12.-03	1286.	-322.8	-20.7	-178.4	172.	44.
S-12.-04	1287.	-305.7	-19.9	-174.1	163.	44.
S-12.-05	1286.	-275.6	-19.1	-164.7	150.	43.
S-12.-06	1286.	-251.5	-18.6	-155.4	139.	42.
S-12.-07	1289.	-221.4	-17.8	-140.1	126.	39.
S-12.-08	1288.	-197.3	-17.2	-129.8	115.	36.
S-12.-09	1283.	-183.2	-16.2	-120.5	104.	36.
S-12.-10	1279.	-161.1	-15.6	-108.2	95.	36.
S-12.-11	1287.	-148.9	-14.8	-99.8	88.	36.
S-12.-12	1286.	-142.8	-14.7	-96.5	88.	36.
S-12.-13	1289.	-134.7	-14.5	-90.2	81.	37.
S-12.-14	1297.	-128.6	-14.0	-83.9	75.	39.
S-12.-15	1317.	-120.5	-13.4	-79.6	68.	39.
S-12.-16	1288.	-330.4	-34.6	-145.3	647.	---
S-12.-17	1281.	-172.3	-16.5	-113.9	103.	38.
S-12.-18	839.	-130.2	-11.8	-82.6	87.	38.
S-12.-19	420.	-68.1	-6.9	-42.3	76.	48.
S-12.-20	419.	-120.0	-10.7	-49.0	754.	---



\*\*HYDROFOIL DATA REDUCTION\*\*

RUN NO	ALPHA	LIFT-LB	DRAG-LB	NON-INTLB	VEL-PPS
S-12.-01	12.00	35.06	7.33	8.28	26.60
S-12.-02	12.00	35.24	7.32	8.10	26.57
S-12.-03	12.00	32.81	7.19	7.78	26.62
S-12.-04	12.00	30.78	7.01	7.49	26.63
S-12.-05	12.00	27.96	6.64	7.20	26.62
S-12.-06	12.00	25.54	6.26	6.99	26.62
S-12.-07	12.00	22.51	5.65	6.70	26.65
S-12.-08	12.00	20.08	5.23	6.45	26.64
S-12.-09	12.00	18.65	4.86	6.09	26.59
S-12.-10	12.00	16.43	4.36	5.88	26.55
S-12.-11	12.00	15.20	4.02	5.56	26.63
S-12.-12	12.00	14.59	3.89	5.53	26.62
S-12.-13	12.00	13.78	3.64	5.47	26.65
S-12.-14	12.00	13.16	3.38	5.26	26.73
S-12.-15	12.00	12.33	3.21	5.05	26.92
S-12.-16	12.00	33.76	5.85	13.00	26.64
S-12.-17	12.00	17.58	4.59	6.20	26.57
S-12.-18	12.00	13.27	3.33	4.45	21.82
S-12.-19	12.00	6.95	1.71	2.58	15.82
S-12.-20	12.00	12.22	1.97	4.03	15.80

LEGEND VEL UPSTREAM VELOCITY (U)





EXPER INVES OF WALL EFFECTS ON SUPERCavitating HYDROFOILS OF FINITE SPAN

••HYDROFOIL DATA IN NONDIMENSIONAL FORM (NO CORRECTIONS APPLIED)••

RUN NO	ALPHA	CL	CDUNC	CM	L/D	D/L	RE*10**6
S-12.-01	12.00	0.7384	0.1441	0.0867	5.1258	0.1951	0.5241
S-12.-02	12.00	0.7438	0.1441	0.0851	5.1609	0.1938	0.5235
S-12.-03	12.00	0.6901	0.1408	0.0814	4.9024	0.2040	0.5245
S-12.-04	12.00	0.8470	0.1370	0.0783	4.7226	0.2117	0.5247
S-12.-05	12.00	0.5880	0.1292	0.0754	4.5508	0.2197	0.5245
S-12.-06	12.00	0.5371	0.1213	0.0732	4.4271	0.2259	0.5245
S-12.-07	12.00	0.8724	0.1081	0.0700	4.3708	0.2288	0.5250
S-12.-08	12.00	0.4218	0.0994	0.0674	4.2423	0.2357	0.5249
S-12.-09	12.00	0.3932	0.0919	0.0639	4.2778	0.2338	0.5239
S-12.-10	12.00	0.3473	0.0817	0.0618	4.2507	0.2353	0.5231
S-12.-11	12.00	0.3195	0.0741	0.0581	4.3094	0.2320	0.5247
S-12.-12	12.00	0.3069	0.0714	0.0579	4.2984	0.2326	0.5245
S-12.-13	12.00	0.2891	0.0659	0.0571	4.3890	0.2378	0.5250
S-12.-14	12.00	0.2745	0.0601	0.0546	4.5648	0.2191	0.5266
S-12.-15	12.00	0.2537	0.0556	0.0517	4.5655	0.2190	0.5303
S-12.-16	12.00	0.7091	0.1125	0.1358	6.3016	0.1587	0.5249
S-12.-17	12.00	0.3710	0.0865	0.0651	4.2886	0.2332	0.5235
S-12.-18	12.00	0.4152	0.0935	0.0693	4.4412	0.2252	0.4300
S-12.-19	12.00	0.4143	0.0904	0.0765	4.5842	0.2181	0.3116
S-12.-20	12.00	0.7299	0.1067	0.1196	6.8414	0.1462	0.3113

LEGEND

ALPHA GEOMETRIC ANGLE OF ATTACK CORRECTED FOR SHAFT TWIST

CL LIFT COEFFICIENT, NONDIMENSIONALIZED ON UPSTREAM VELOCITY AND MODEL PLANFORM AREA

CDUNC C<sub>D</sub>(UNCORRECTED), THE UNCORRECTED DRAG COEFFICIENT AS COMPUTED FROM MEASURED DRAG, AND NONDIMENSIONALIZED

ON UPSTREAM VELOCITY AND MODEL PLANFORM AREA

CM MOMENT COEFFICIENT, NONDIMENSIONALIZED ON UPSTREAM VELOCITY, MODEL PLANFORM AREA, AND MEAN CHORD

L/D LIFT-TO-DRAG RATIO = CL/CDUNC

D/L DRAG-TO-LIFT RATIO = CDUNC/CL

RE REYNOLDS NUMBER, BASED ON MEAN CHORD



\*\*PRIOR DATA CORRECTED FOR EFFECTS OF IMAGES OF TRAILING VORTEX SYSTEM\*\*

RUN NO	ALPHAT	CL	CD	CM	(D/L)	SIGV/AT	SIGC/AT	CL/AT	CD/AT2	CM/AT	SIGV	SIGC	CAVLTH	COMMENTS/REMARKS
S-12--01	12.13	0.738	0.146	0.087	0.197	2.894	2.661	3.487	3.250	0.409	0.613	0.564	0.82	
S-12--02+	12.14	0.744	0.146	0.085	0.196	2.897	2.686	3.512	3.252	0.402	0.614	0.569	---	
S-12--03	12.13	0.690	0.142	0.081	0.206	2.657	2.467	3.261	3.176	0.385	0.562	0.522	0.91	
S-12--04	12.12	0.647	0.138	0.078	0.214	2.481	2.293	3.059	3.092	0.370	0.525	0.485	0.92	
S-12--05	12.11	0.588	0.130	0.075	0.222	2.235	2.066	2.783	2.918	0.357	0.472	0.437	1.00	
S-12--06	12.10	0.537	0.122	0.073	0.228	2.020	1.875	2.543	2.741	0.346	0.427	0.396	1.10	
S-12--07	12.09	0.472	0.109	0.070	0.230	1.766	1.680	2.239	2.445	0.332	0.372	0.354	1.30	
S-12--08	12.08	0.422	0.100	0.067	0.237	1.554	1.529	2.001	2.251	0.320	0.328	0.322	1.47	
S-12--09	12.07	0.393	0.092	0.064	0.235	1.345	1.322	1.866	2.081	0.303	0.283	0.279	1.80	
S-12--10	12.06	0.347	0.082	0.062	0.236	1.173	1.152	1.650	1.852	0.294	0.247	0.243	2.40	
S-12--11	12.06	0.320	0.074	0.058	0.233	1.029	1.011	1.518	1.681	0.276	0.217	0.213	2.50	
S-12--12+	12.06	0.307	0.072	0.058	0.234	1.028	1.012	1.458	1.619	0.275	0.216	0.213	---	
S-12--13	12.05	0.289	0.066	0.057	0.229	0.889	0.855	1.374	1.495	0.272	0.187	0.180	3.87	
S-12--14	12.05	0.274	0.060	0.055	0.220	0.767	0.697	1.305	1.365	0.260	0.161	0.147	4.30	
S-12--15	12.05	0.254	0.056	0.052	0.220	0.621	0.555	1.207	1.262	0.246	0.131	0.117	6.30	PB
S-12--16	12.13	0.709	0.114	0.136	0.161	---	---	3.349	2.546	0.642	---	---	---	
S-12--17	12.07	0.371	0.087	0.065	0.234	1.310	1.266	1.761	1.960	0.309	0.276	0.267	---	
S-12--18	12.08	0.415	0.094	0.069	0.226	1.478	1.417	1.970	2.117	0.329	0.312	0.299	1.50	
S-12--19	12.08	0.414	0.091	0.077	0.219	2.207	1.549	1.966	2.047	0.363	0.465	0.327	1.65	VEL DROPPING
S-12--20	12.13	0.730	0.108	0.120	0.148	---	---	3.447	2.417	0.565	---	---	---	PB

UNLESS OTHERWISE INDICATED, ALL DATA ARE FOR:

1. SUPERCAVITATING FLOW.
2. BOTH STATIC PRESSURE TAPS OPEN.

LEGEND

\* ONLY UPSTREAM STATIC PRESSURE TAP UTILIZED

\* ONLY DNSTREAM STATIC PRESSURE TAP UTILIZED

PC PARTIALLY CAVITATING

PC(TH) PARTIALLY CAVITATING (TAP WETTED)

PB FULLY WETTED

AT (ALPHAT) (TRUE) ANGLE OF ATTACK, CORRECTED FOR EFFECTS OF IMAGES OF TRAILING VORTICES

AT2 ALPHAT\*2

SIGC CAVITATION NUMBER COMPUTED WITH MEASURED CAVITY PRESSURE

SIGV CAVITATION NUMBER COMPUTED WITH CALCULATED VAPOR PRESSURE

CD DRAG COEFFICIENT, CORRECTED FOR EFFECTS OF IMAGES OF TRAILING VORTICES

(D/L) CORRECTED DRAG-TO-LIFT RATIO = CD/CL

CAVLTH CAVITY LENGTH MEASURED FROM MIDCHORD AT CENTROID POSITION, NONDIMENSIONALIZED ON MEAN CHORD (OBTAINED FROM PHOTOGRAPHS)



HYDROFOIL INPUT DATA  
TR TT AREA SPAN MAC  
77 92 10.0 5.0 2.01

ZERO READINGS AND TUNNEL TEMP BEFORE AND AFTER

MANOM 1-M 1-R 2-M 2-R 3-M 3-R TT  
0. 0.0 0.0 0.0 100.0 0.0 100.0 90.0  
0. -2.0 0.0 0.0 100.0 0.0 100.0 93.0

CELL LBS/CT (NORMAL/REV) #1=0.10000 #2=0.02090 #3=0.04030

SHAFT DIA.= 1.50IN

\*\*INPUT DATA AS RECORDED\*\*

RUN NO	MANOM	S	#1	S	#2	S	#3	PINH	PCAV	PV
S-14.-01	476.	-158.0	R	116.0	R	173.0	762.	----	----	----
S-14.-02	893.	-282.0	R	131.0	R	235.0	707.	----	----	----
S-14.-03	1376.	-418.0	R	148.0	R	300.0	655.	----	----	----
S-14.-04	1361.	-444.0	R	149.0	R	300.0	325.	----	----	----
S-14.-05	1351.	-460.0	R	142.0	R	325.0	297.	----	----	----
S-14.-06	1348.	-460.0	R	132.0	R	350.0	265.	73.	----	----
S-14.-07	1337.	-432.0	R	127.6	R	348.0	242.	61.	----	----
S-14.-08	1328.	-400.0	R	125.2	R	343.0	224.	56.	----	----
S-14.-09	1323.	-358.0	R	123.5	R	332.0	204.	52.	----	----
S-14.-10	1324.	-324.0	R	122.3	R	319.0	188.	50.	----	----
S-14.-11	1319.	-290.0	R	121.2	R	300.0	172.	48.	----	----
S-14.-12+	1316.	-286.0	R	121.2	R	300.0	172.	48.	----	----
S-14.-13	1313.	-262.0	R	120.4	R	287.0	159.	45.	----	----
S-14.-14	1312.	-230.0	R	119.5	R	270.0	143.	41.	----	----
S-14.-15	1309.	-204.0	R	118.2	R	256.0	130.	40.	----	----
S-14.-16	1308.	-190.0	R	117.9	R	244.0	121.	40.	----	----
S-14.-17	1304.	-172.0	R	117.0	R	231.0	109.	40.	----	----
S-14.-18+	1302.	-164.0	R	116.8	R	223.0	109.	40.	----	----
S-14.-19	1301.	-158.0	R	116.0	R	217.0	101.	40.	----	----
S-14.-20	1308.	-146.0	R	115.5	R	207.0	94.	40.	----	----
S-14.-21	1334.	-138.0	R	115.0	R	200.0	87.	40.	----	----
S-14.-22	1300.	-246.0	R	120.1	R	276.0	151.	44.	----	----
S-14.-23	870.	-174.0	R	114.1	R	223.0	126.	44.	----	----
S-14.-24	694.	-130.0	R	111.1	R	188.0	105.	42.	----	----
S-14.-25	450.	-82.0	R	107.6	R	155.0	89.	42.	----	----

LOAD CELL #1 LIFT (COUNTS)  
#2 MOMENT ABOUT MIDCHORD (COUNTS)  
#3 DRAG (COUNTS)  
PINP STATIC PRESSURE (MM HG)  
PCAV CAVITY PRESSURE (MM HG)  
RUN NO Q-XX-YY: Q-POIL TESTED(S=SMALL,M=MED,L=LARGE)  
IIX=GEOMETRIC ATTACK ANGLE (DEGREES)  
IY=RUN NUMBER, THIS POIL @ THIS ANGLE

TR ROOM TEMPER (DEG FAHR)  
TT TUNNEL " ( " " )  
AREA HALF-SPAN MODEL PLANFORM AREA (SQ IN)  
SPAN FOIL HALF-SPAN (IN)  
MAC MEAN CHORD, REAS. @ MODEL CENTROID(IN)  
MANOM VELOCITY MANOMETER READING (MM)  
TWIST SHAFT TWIST (DEGREES/IN-LB)  
S LOAD CELL POLARITY (N=NORMAL,R=REVERSE)



INPUT DATA COLLECTED FOR ZERO READINGS, SIGNS, AND HYDROSTATIC PRESSURE

RUN NO	HABON	#1	#2	#3	PINF	PCAV
S-14.-01	476.	-158.0	-16.0	-73.0	747.	----
S-14.-02	893.	-281.9	-31.0	-135.0	692.	----
S-14.-03	1376.	-417.8	-48.0	-200.0	640.	----
S-14.-04	1361.	-443.7	-48.9	-200.0	310.	----
S-14.-05	1351.	-459.7	-41.9	-225.0	282.	----
S-14.-06	1348.	-459.6	-31.9	-250.0	250.	73.
S-14.-07	1337.	-431.5	-27.5	-248.0	227.	61.
S-14.-08	1328.	-399.4	-25.1	-243.0	209.	56.
S-14.-09	1323.	-357.3	-23.4	-232.0	189.	52.
S-14.-10	1324.	-323.2	-22.1	-219.0	173.	50.
S-14.-11	1319.	-289.2	-21.0	-200.0	157.	48.
S-14.-12	1316.	-285.1	-21.0	-200.0	157.	48.
S-14.-13	1313.	-261.0	-20.2	-187.0	144.	45.
S-14.-14	1312.	-228.9	-19.3	-170.0	128.	41.
S-14.-15	1309.	-202.8	-18.0	-156.0	115.	40.
S-14.-16	1309.	-188.7	-17.6	-144.0	106.	40.
S-14.-17	1304.	-170.7	-16.7	-131.0	94.	40.
S-14.-18	1302.	-162.6	-16.5	-123.0	94.	40.
S-14.-19	1301.	-156.5	-15.7	-117.0	86.	40.
S-14.-20	1308.	-144.4	-15.2	-107.0	79.	40.
S-14.-21	1334.	-136.3	-14.7	-100.0	72.	40.
S-14.-22	1300.	-244.2	-19.8	-176.0	136.	44.
S-14.-23	870.	-172.2	-13.7	-123.0	111.	44.
S-14.-24	694.	-128.1	-10.7	-88.0	90.	42.
S-14.-25	450.	-80.0	-7.2	-55.0	74.	42.





\*\*HYDROFOIL DATA REDUCTION\*\*

RUN NO	LIFT-LB	DRAQ-LB	NOB-INLB	VEL-FPS
S-14.-01	14.00	2.94	6.02	16.77
S-14.-02	14.00	5.44	11.66	22.47
S-14.-03	14.00	42.79	18.05	27.48
S-14.-04	14.00	45.40	18.41	27.34
S-14.-05	14.00	46.84	15.78	27.24
S-14.-06	14.00	46.63	12.01	27.21
S-14.-07	14.00	43.72	10.35	27.11
S-14.-08	14.00	40.47	9.44	27.03
S-14.-09	14.00	36.22	8.79	26.98
S-14.-10	14.00	32.79	8.33	26.99
S-14.-11	14.00	29.36	7.91	26.94
S-14.-12	14.00	28.95	8.06	26.91
S-14.-13	14.00	26.52	7.54	26.88
S-14.-14	14.00	23.29	6.85	26.87
S-14.-15	14.00	20.66	6.29	26.85
S-14.-16	14.00	19.24	5.80	26.85
S-14.-17	14.00	17.42	5.28	26.80
S-14.-18	14.00	16.69	4.96	26.78
S-14.-19	14.00	15.98	4.72	26.77
S-14.-20	14.00	14.76	4.31	26.84
S-14.-21	14.00	13.94	4.03	27.08
S-14.-22	14.00	24.84	7.09	26.76
S-14.-23	14.00	17.50	4.96	22.20
S-14.-24	14.00	13.03	3.55	19.98
S-14.-25	14.00	8.15	2.22	16.34

LEGEND VEL UPSTREAM VELOCITY (U)



••HYDROFOIL DATA IN NONDIMENSIONAL FORM (NO CORRECTIONS APPLIED)••

RUN NO	ALPHA	CL	CDUNC	CM	L/D	D/L	RM*10**6
S-1a.-01	14.00	0.8556	0.1449	0.1588	5.9040	0.1694	0.3387
S-1a.-02	14.00	0.8516	0.1500	0.1712	5.6766	0.1762	0.4538
S-1a.-03	14.00	0.8450	0.1488	0.1773	5.6770	0.1761	0.5549
S-1a.-04	14.00	0.9058	0.1505	0.1828	6.0197	0.1661	0.5521
S-1a.-05	14.00	0.9410	0.1718	0.1577	5.4772	0.1826	0.5502
S-1a.-06	14.00	0.9386	0.1925	0.1203	4.8767	0.2051	0.5497
S-1a.-07	14.00	0.8869	0.1924	0.1044	4.6104	0.2169	0.5476
S-1a.-08	14.00	0.8260	0.1895	0.0958	4.3580	0.2295	0.5459
S-1a.-09	14.00	0.7420	0.1812	0.0896	4.0957	0.2442	0.5449
S-1a.-10	14.00	0.6712	0.1703	0.0849	3.9411	0.2537	0.5451
S-1a.-11	14.00	0.6030	0.1552	0.0809	3.8854	0.2574	0.5441
S-1a.-12	14.00	0.5959	0.1556	0.0810	3.8308	0.2610	0.5436
S-1a.-13	14.00	0.5471	0.1451	0.0780	3.7708	0.2652	0.5430
S-1a.-14	14.00	0.4809	0.1311	0.0745	3.6691	0.2725	0.5428
S-1a.-15	14.00	0.4274	0.1197	0.0696	3.5707	0.2801	0.5422
S-1a.-16	14.00	0.3981	0.1097	0.0683	3.6296	0.2755	0.5422
S-1a.-17	14.00	0.3616	0.0992	0.0650	3.6438	0.2744	0.5412
S-1a.-18	14.00	0.3452	0.0927	0.0643	3.7244	0.2685	0.5409
S-1a.-19	14.00	0.3324	0.0877	0.0611	3.7894	0.2639	0.5407
S-1a.-20	14.00	0.3056	0.0789	0.0588	3.8725	0.2582	0.5420
S-1a.-21	14.00	0.2834	0.0716	0.0558	3.9596	0.2526	0.5470
S-1a.-22	14.00	0.5172	0.1373	0.0770	3.7664	0.2655	0.5405
S-1a.-23	14.00	0.5296	0.1393	0.0778	3.8012	0.2631	0.4484
S-1a.-24	14.00	0.4866	0.1216	0.0749	4.0017	0.2499	0.4036
S-1a.-25	14.00	0.4554	0.1127	0.0753	4.0403	0.2475	0.3299

LEGEND

ALPHA GEOMETRIC ANGLE OF ATTACK CORRECTED FOR SHAFT TWIST

CL LIFT COEFFICIENT, NONDIMENSIONALIZED ON UPSTREAM VELOCITY AND MODEL PLANFORM AREA

CDUNC CD(UNCORRECTED), THE UNCORRECTED DRAG COEFFICIENT AS COMPUTED FROM MEASURED DRAG, AND NONDIMENSIONALIZED ON UPSTREAM VELOCITY AND MODEL PLANFORM AREA

CM MOMENT COEFFICIENT, NONDIMENSIONALIZED ON UPSTREAM VELOCITY, MODEL PLANFORM AREA, AND MEAN CHORD

L/D LIFT-TO-DRAG RATIO = CL/CDUNC

D/L DRAG-TO-LIFT RATIO = CDUNC/CL

RM REYNOLDS NUMBER, BASED ON MEAN CHORD



## \*\*PRIOR DATA CORRECTED FOR EFFECTS OF IMAGES OF TRAILING VORTEX SYSTEM\*\*

RUN NO	ALPHAT	CL	CD	CH	(D/L)	SIGV/AT	SIGC/AT	CL/AT	CD/AT2	CH/AT	SIGV	SIGC	CAVLTH	COMMENTS/REMARKS
S-14-01	14.16	0.856	0.187	0.159	0.172	-----	-----	3.863	2.412	0.643	-----	-----	-----	PV
S-14-02	14.16	0.852	0.152	0.171	0.179	-----	-----	3.487	2.495	0.693	-----	-----	-----	PV
S-14-03	14.16	0.845	0.151	0.177	0.179	-----	-----	3.420	2.476	0.718	-----	-----	-----	PV
S-14-04	14.17	0.906	0.153	0.183	0.169	-----	-----	3.663	2.504	0.739	-----	-----	-----	PC (TV)
S-14-05	14.17	0.941	0.175	0.158	0.186	-----	-----	3.804	2.854	0.637	-----	-----	-----	PC (TV)
S-14-06	14.17	0.939	0.195	0.120	0.208	3.361	2.792	3.795	3.192	0.486	0.831	0.690	0.72	
S-14-07	14.16	0.897	0.195	0.104	0.220	3.022	2.640	3.588	3.190	0.422	0.747	0.653	0.78	
S-14-08	14.15	0.826	0.192	0.096	0.232	2.753	2.451	3.345	3.143	0.388	0.680	0.605	0.88	
S-14-09	14.14	0.742	0.183	0.090	0.246	2.442	2.205	3.008	3.005	0.363	0.603	0.544	0.91	
S-14-10	14.12	0.671	0.172	0.085	0.256	2.184	1.981	2.723	2.827	0.344	0.538	0.488	1.03	
S-14-11	14.11	0.603	0.156	0.081	0.259	1.933	1.764	2.449	2.578	0.328	0.476	0.434	1.30	
S-14-12+	14.11	0.596	0.157	0.081	0.263	1.935	1.768	2.420	2.584	0.329	0.476	0.435	---	
S-14-13	14.10	0.547	0.146	0.078	0.267	1.727	1.611	2.223	2.412	0.317	0.425	0.396	1.40	
S-14-14	14.09	0.481	0.132	0.075	0.274	1.467	1.418	1.956	2.180	0.303	0.361	0.349	1.65	
S-14-15	14.08	0.427	0.120	0.070	0.281	1.257	1.227	1.739	1.992	0.283	0.309	0.301	1.80	
S-14-16	14.07	0.398	0.110	0.068	0.277	1.109	1.081	1.621	1.826	0.278	0.272	0.265	2.18	
S-14-17	14.07	0.362	0.100	0.065	0.276	0.915	0.889	1.473	1.653	0.265	0.225	0.218	2.60	
S-14-18+	14.06	0.345	0.093	0.064	0.270	0.914	0.890	1.406	1.545	0.262	0.224	0.219	---	
S-14-19	14.06	0.332	0.088	0.061	0.265	0.781	0.760	1.355	1.463	0.249	0.192	0.186	4.10	
S-14-20	14.06	0.306	0.079	0.059	0.259	0.660	0.642	1.246	1.316	0.240	0.162	0.158	4.80	
S-14-21	14.05	0.283	0.072	0.056	0.253	0.534	0.518	1.155	1.194	0.228	0.131	0.127	6.40	
S-14-22	14.09	0.517	0.138	0.077	0.267	1.591	1.512	2.102	2.283	0.313	0.391	0.372	---	
S-14-23	14.10	0.530	0.140	0.078	0.265	1.713	1.602	2.153	2.316	0.316	0.421	0.394	1.40	
S-14-24	14.09	0.487	0.122	0.075	0.251	1.494	1.420	1.979	2.024	0.305	0.367	0.349	1.55	
S-14-25	14.08	0.455	0.113	0.075	0.249	1.526	1.422	1.853	1.877	0.306	0.375	0.349	1.50	

UNLESS OTHERWISE INDICATED, ALL DATA ARE FOR:

1. SUPERCAVITATING FLOW.
2. BOTH STATIC PRESSURE TAPS OPEN.

## LEGEND

+ ONLY UPSTREAM STATIC PRESSURE TAP UTILIZED  
 \* ONLY DNSTREAM STATIC PRESSURE TAP UTILIZED

PC PARTIALLY CAVITATING

PC(TV) PARTIALLY CAVITATING (TAP WETTED)

PV FULLY WETTED

AT (ALPHAT) (TRUE) ANGLE OF ATTACK, CORRECTED FOR EFFECTS OF IMAGES OF TRAILING VORTICES

AT2 ALPHAT\*\*2

SIGC CAVITATION NUMBER COMPUTED WITH MEASURED CAVITY PRESSURE

SIGV CAVITATION NUMBER COMPUTED WITH CALCULATED VAPOR PRESSURE

CD DRAG COEFFICIENT, CORRECTED FOR EFFECTS OF IMAGES OF TRAILING VORTICES

(D/L) CORRECTED DRAG-TO-LIFT RATIO = CD/CL

CAVLTH CAVITY LENGTH MEASURED FROM MIDCHORD AT CENTROID POSITION, NONDIMENSIONALIZED ON MEAN CHORD  
(OBTAINED FROM PHOTOGRAPHS)



HYDROFOIL INPUT DATA  
TR TT ARZA SPAN HAC  
77 93 10.0 5.0 2.01

ZERO READINGS AND TUNNEL TIME BEFORE AND AFTER

MANOM 1-N 1-R 2-R 3-R TT  
0. 0.0 0.0 0.0 100.0 0.0 100.0 92.8  
0. 0.0 0.0 0.0 99.4 0.0 104.0 94.0

CELL RES/CT(NORMAL/REV) #1=0.10000 #2=0.02090 #3=0.04030

TWIST= 7200.0 SHAFT DIA.= 1.50IN

\*\*INPUT DATA AS RECORDED\*\*

RUN NO	MANOM	S	#1	S	#2	S	#3	PINP	PCAV
S-16.-01	1193.	R	-400.0	R	124.2	R	376.0	236.	72.
S-16.-02	1189.	R	-370.0	R	122.6	R	372.0	217.	64.
S-16.-03+	1190.	R	-362.0	R	122.4	R	368.0	216.	62.
S-16.-04	1189.	R	-340.0	R	121.8	R	357.0	201.	60.
S-16.-05	1189.	R	-318.0	R	121.1	R	348.0	192.	57.
S-16.-06	1186.	R	-300.0	R	120.6	R	337.0	182.	55.
S-16.-07	1188.	R	-284.0	R	119.7	R	330.0	174.	53.
S-16.-08	1183.	R	-262.0	R	119.5	R	318.0	163.	50.
S-16.-09	1184.	R	-242.0	R	118.9	R	307.0	153.	46.
S-16.-10	1180.	R	-224.0	R	117.9	R	294.0	143.	44.
S-16.-11+	1181.	R	-220.0	R	118.0	R	291.0	143.	44.
S-16.-12	1178.	R	-202.0	R	117.1	R	278.0	131.	43.
S-16.-13	1179.	R	-184.0	R	116.4	R	261.0	119.	42.
S-16.-14	1176.	R	-168.0	R	115.9	R	248.0	109.	42.
S-16.-15	1172.	R	-158.0	R	115.2	R	237.0	102.	42.
S-16.-16	1181.	R	-146.0	R	114.6	R	225.0	92.	42.
S-16.-17	1195.	R	-138.0	R	113.9	R	219.0	88.	42.
S-16.-18	721.	R	-130.0	R	110.9	R	212.0	105.	42.
S-16.-19	485.	R	-110.0	R	108.4	R	188.0	100.	43.

LOAD CELL #1 LIFT (COUNTS) #2 MOMENT ABOUT MIDCHORD (COUNTS)

#3 DRAG (COUNTS)

PINP STATIC PRESSURE (MM HG)

PCAV CAVITY PRESSURE (MM HG)

RUN NO Q-XXX-YY: Q=FOIL TESTED(S=SMALL,M=MED,L=LARGE)

XXX=GEOMETRIC ATTACK ANGLE (DEGREES)

YY=RUN NUMBER, THIS FOIL & THIS ANGLE

TR ROOM TEMPER (DEG FAHR)  
TT TUNNEL " ( " )

AREA HALF-SPAN MODEL PLANFORM AREA (SQ IN)

SPAN FOIL HALF-SPAN (IN)

HAC MEAN CHORD, MEAS. & MODEL CENTROID (IN)

MANOM VELOCITY MANOMETER READING (MM)

TWIST SHAFT TWIST (DEGREES/IN-LB)

S LOAD CELL POLARITY (N=NORMAL,R=REVERSE)





ZIPER INVER OF WALL EFFECTS ON SUPERCavitating HYDROFOILS OF FINITE SPAN

INPUT DATA CORRECTED FOR ZERO READINGS, SIGNS, AND HYDROSTATIC PRESSURE

RUN NO	MANOM	#1	#2	#3	PINF	PCAV
S-16.-01	1193.	-400.0	-24.2	-276.0	221.	72.
S-16.-02	1189.	-370.0	-22.6	-271.8	202.	64.
S-16.-03	1190.	-362.0	-22.5	-267.6	201.	62.
S-16.-04	1189.	-380.0	-21.9	-256.3	186.	60.
S-16.-05	1188.	-318.0	-21.2	-247.1	177.	57.
S-16.-06	1186.	-300.0	-20.8	-235.9	167.	55.
S-16.-07	1188.	-284.0	-19.9	-228.7	159.	53.
S-16.-08	1183.	-282.0	-19.7	-216.4	148.	50.
S-16.-09	1184.	-242.0	-19.2	-205.2	138.	46.
S-16.-10	1180.	-224.0	-18.2	-192.0	128.	44.
S-16.-11	1181.	-220.0	-18.3	-188.8	128.	44.
S-16.-12	1178.	-202.0	-17.5	-175.6	116.	43.
S-16.-13	1179.	-184.0	-16.8	-158.3	104.	42.
S-16.-14	1176.	-168.0	-16.3	-145.1	94.	42.
S-16.-15	1172.	-158.0	-15.7	-133.9	87.	42.
S-16.-16	1181.	-156.0	-15.1	-121.7	77.	42.
S-16.-17	1195.	-138.0	-14.4	-115.4	73.	42.
S-16.-18	721.	-130.0	-11.5	-108.2	90.	42.
S-16.-19	485.	-110.0	-9.0	-84.0	85.	43.



EXPER INVES OF WALL EFFECTS ON SUPERCAVITATING HYDROFOILS OF FINITE SPAN

\*\*HYDROFOIL DATA REDUCTION\*\*

RUN NO	ALPHA	LIFT-LB	DRAG-LB	HOB-INLB	VEL-PPS
S-16.-01	16.00	40.51	11.12	9.10	25.71
S-16.-02	16.00	37.47	10.95	8.51	25.67
S-16.-03	16.00	36.67	10.78	8.45	25.68
S-16.-04	16.00	34.46	10.33	8.24	25.67
S-16.-05	16.00	32.24	9.96	7.99	25.66
S-16.-06	16.00	30.43	9.51	7.81	25.64
S-16.-07	16.00	28.82	9.22	7.49	25.66
S-16.-08	16.00	26.61	8.72	7.42	25.61
S-16.-09	16.00	24.60	8.27	7.21	25.62
S-16.-10	16.00	22.78	7.74	6.85	25.58
S-16.-11	16.00	22.38	7.61	6.90	25.59
S-16.-12	16.00	20.57	7.07	6.57	25.56
S-16.-13	16.00	18.75	6.38	6.32	25.57
S-16.-14	16.00	17.14	5.85	6.14	25.54
S-16.-15	16.00	16.13	5.40	5.89	25.50
S-16.-16	16.00	14.92	4.90	5.68	25.59
S-16.-17	16.00	14.10	4.65	5.43	25.73
S-16.-18	16.00	13.24	4.35	4.31	20.34
S-16.-19	16.00	11.19	3.39	3.39	16.92

LEGEND VEL DPSTREAM VELOCITY (U)



\*\*HYDROFOIL DATA IN NONDIMENSIONAL FORM (NO CORRECTIONS APPLIED)\*\*

RUN NO	ALPHA	CL	CDUNC	CH	L/D	D/L	RE*10 <sup>-6</sup>
S-16.-01	16.00	0.9136	0.2404	0.1022	3.7995	0.2632	0.5235
S-16.-02	16.00	0.8478	0.2374	0.0958	3.5716	0.2800	0.5226
S-16.-03	16.00	0.8290	0.2333	0.0951	3.5528	0.2815	0.5228
S-16.-04	16.00	0.7796	0.2233	0.0927	3.4913	0.2864	0.5226
S-16.-05	16.00	0.7301	0.2151	0.0900	3.3947	0.2946	0.5224
S-16.-06	16.00	0.6902	0.2052	0.0881	3.3641	0.2973	0.5220
S-16.-07	16.00	0.6525	0.1982	0.0843	3.2914	0.3138	0.5224
S-16.-08	16.00	0.6049	0.1879	0.0840	3.2203	0.3105	0.5214
S-16.-09	16.00	0.5588	0.1774	0.0815	3.1493	0.3175	0.5216
S-16.-10	16.00	0.5191	0.1659	0.0776	3.1292	0.3196	0.5208
S-16.-11	16.00	0.5096	0.1628	0.0781	3.1306	0.3194	0.5210
S-16.-12	16.00	0.4693	0.1510	0.0746	3.1075	0.3218	0.5204
S-16.-13	16.00	0.4276	0.1351	0.0717	3.1656	0.3159	0.5206
S-16.-14	16.00	0.3918	0.1232	0.0699	3.1793	0.3145	0.5200
S-16.-15	16.00	0.3698	0.1133	0.0672	3.2642	0.3064	0.5192
S-16.-16	16.00	0.3396	0.1012	0.0643	3.3555	0.2980	0.5210
S-16.-17	16.00	0.3176	0.0943	0.0608	3.3658	0.2971	0.5239
S-16.-18	16.00	0.4771	0.1464	0.0773	3.2591	0.3068	0.4141
S-16.-19	16.00	0.5831	0.1654	0.0878	3.5261	0.2836	0.3444

LEGEND

ALPHA GEOMETRIC ANGLE OF ATTACK CORRECTED FOR SHAFT TWIST

CL LIFT COEFFICIENT, NONDIMENSIONALIZED ON UPSTREAM VELOCITY AND MODEL PLANFORM AREA

CDUNC CL(UNCORRECTED), THE UNCORRECTED DRAG COEFFICIENT AS COMPUTED FROM MEASURED DRAG, AND NONDIMENSIONALIZED ON UPSTREAM VELOCITY AND MODEL PLANFORM AREA

CH MOMENT COEFFICIENT, NONDIMENSIONALIZED ON UPSTREAM VELOCITY, MODEL PLANFORM AREA, AND MEAN CHORD

L/D LIFT-TO-DRAG RATIO = CL/CDUNC

D/L DRAG-TO-LIFT RATIO = CDUNC/CL

RE REYNOLDS NUMBER, BASED ON MEAN CHORD



PRELIMINARY DATA CORRECTED FOR EFFECTS OF IMAGES OF TRAILING VORTEX SYSTEM\*\*

RUN NO	ALPHAT	CL	CD	CM	(D/L)	SIGV/AT	SIGC/AT	CL/AT	CD/AT2	CH/AT	SIGV	SIGC	CAVLTH	COMMENTS/REMARKS
S-16.-01	16.17	0.914	0.283	0.102	0.266	2.813	2.309	3.238	3.053	0.362	0.794	0.651	0.88	
S-16.-02	16.15	0.848	0.280	0.096	0.283	2.528	2.147	3.007	3.015	0.340	0.713	0.605	0.90	
S-16.-03+	16.15	0.829	0.235	0.095	0.284	2.509	2.161	2.941	2.964	0.337	0.707	0.609	---	
S-16.-04	16.14	0.780	0.225	0.093	0.289	2.279	1.962	2.767	2.837	0.329	0.642	0.553	1.02	
S-16.-05	16.13	0.730	0.217	0.090	0.297	2.140	1.872	2.593	2.734	0.320	0.603	0.527	1.09	
S-16.-06	16.13	0.690	0.207	0.088	0.299	1.988	1.751	2.452	2.609	0.313	0.559	0.493	1.10	
S-16.-07	16.12	0.652	0.200	0.084	0.306	1.859	1.655	2.319	2.522	0.300	0.523	0.466	1.30	
S-16.-08	16.11	0.605	0.189	0.084	0.312	1.695	1.538	2.151	2.391	0.299	0.476	0.432	1.35	
S-16.-09	16.10	0.559	0.178	0.081	0.319	1.536	1.443	1.988	2.259	0.290	0.432	0.406	1.58	
S-16.-10	16.09	0.519	0.167	0.078	0.321	1.384	1.323	1.848	2.113	0.276	0.389	0.372	1.70	
S-16.-11+	16.09	0.510	0.164	0.078	0.321	1.382	1.322	1.814	2.074	0.278	0.388	0.371	---	
S-16.-12	16.08	0.469	0.152	0.075	0.323	1.196	1.153	1.672	1.925	0.266	0.336	0.324	2.10	
S-16.-13	16.08	0.428	0.136	0.072	0.317	1.005	0.980	1.524	1.723	0.256	0.282	0.275	2.80	
S-16.-14	16.07	0.392	0.124	0.070	0.316	0.849	0.825	1.397	1.572	0.249	0.238	0.231	3.20	
S-16.-15	16.07	0.370	0.114	0.067	0.308	0.740	0.717	1.319	1.446	0.240	0.208	0.201	4.30	
S-16.-16	16.06	0.340	0.102	0.064	0.299	0.577	0.555	1.211	1.292	0.230	0.162	0.156	6.00	
S-16.-17	16.06	0.318	0.095	0.061	0.298	0.507	0.487	1.133	1.205	0.217	0.142	0.136	7.00	
S-16.-18	16.09	0.477	0.147	0.077	0.308	1.230	1.200	1.699	1.866	0.275	0.345	0.337	2.10	
S-16.-19	16.11	0.583	0.166	0.088	0.285	1.594	1.518	2.074	2.106	0.312	0.448	0.427	1.22	

UNLESS OTHERWISE INDICATED, ALL DATA ARE FOR:

1. SUPERCavitating FLOW.
2. BOTH STATIC PRESSURE TAPS OPEN.

LEGEND

- \* ONLY UPSTREAM STATIC PRESSURE TAP UTILIZED
- \* ONLY DOWNSTREAM STATIC PRESSURE TAP UTILIZED
- PC PARTIALLY CAVITATING
- PC(TW) PARTIALLY CAVITATING (TAP WETTED)
- PM FULLY WETTED
- AT (ALPHAT) (TRUE) ANGLE OF ATTACK, CORRECTED FOR EFFECTS OF IMAGES OF TRAILING VORTICES
- AT2 ALPHAT\*2
- SIGC CAVITATION NUMBER COMPUTED WITH MEASURED CAVITY PRESSURE
- SIGV CAVITATION NUMBER COMPUTED WITH CALCULATED VAPOR PRESSURE
- CD DRAG COEFFICIENT, CORRECTED FOR EFFECTS OF IMAGES OF TRAILING VORTICES
- (D/L) CORRECTED DRAG-TO-LIFT RATIO = CD/CL
- CAVLTH CAVITY LENGTH MEASURED FROM MIDCHORD AT CENTROID POSITION, NONDIMENSIONALIZED ON MEAN CHORD (OBTAINED FROM PHOTOGRAPHS)





# HYDROPOIL INPUT DATA

TR TT AREA SPAN HAC  
78 92 10.0 5.0 2.01

## ZERO READINGS AND TUNNEL TEMP BEFORE AND AFTER

MANOM 1-R 1-R 2-W 2-R 3-M 3-R TT  
0. 0.0 0.0 0.0 100.0 0.0 100.0 90.0  
0. 0.0 0.0 0.0 100.8 0.0 91.0 93.0

CELL LES/CT (NORMAL/REV) #1=0.10000 #2=0.02090 #3=0.04030

SHAFT DIA.= 1.501M

\*\*INPUT DATA AS RECORDED\*\*

PON NO	MANOM	S	#1	S	#2	S	#3	PINI'	PCAV
S-18--01	1455.		-542.0	R	133.9	R	506.0	310.	91.
S-18--02+	1454.		-534.0	R	133.9	R	503.0	310.	89.
S-18--03	1454.		-520.0	R	132.4	R	500.0	297.	86.
S-18--04	1454.		-500.0	R	131.2	R	493.0	283.	79.
S-18--05	1446.		-474.0	R	130.1	R	486.0	268.	75.
S-18--06	1444.		-452.0	R	129.1	R	474.0	255.	71.
S-18--07	1446.		-428.0	R	128.4	R	463.0	241.	67.
S-18--08	1443.		-400.0	R	128.0	R	443.0	226.	61.
S-18--09	1437.		-378.0	R	127.2	R	436.0	217.	59.
S-18--10+	1438.		-372.0	R	127.1	R	430.0	217.	58.
S-18--11	1435.		-354.0	R	126.7	R	418.0	204.	55.
S-18--12	1430.		-336.0	R	126.0	R	406.0	193.	52.
S-18--13	1427.		-316.0	R	125.3	R	392.0	183.	47.
S-18--14	1425.		-296.0	R	124.9	R	377.0	170.	44.
S-18--15	1421.		-276.0	R	124.0	R	363.0	158.	43.
S-18--16	1417.		-256.0	R	123.1	R	344.0	146.	41.
S-18--17+	1414.		-250.0	R	123.0	R	337.0	145.	40.
S-18--18	1415.		-244.0	R	122.5	R	331.0	139.	40.
S-18--19	1410.		-226.0	R	122.0	R	313.0	129.	40.
S-18--20	1404.		-214.0	R	121.1	R	300.0	120.	40.
S-18--21+	1401.		-208.0	R	121.0	R	297.0	119.	40.
S-18--22	1399.		-200.0	R	120.5	R	284.0	110.	40.
S-18--23	1406.		-184.0	R	119.2	R	269.0	98.	40.
S-18--24	1406.		-178.0	R	118.9	R	263.0	96.	40.
S-18--25	1423.		-172.0	R	118.4	R	257.0	87.	40.
S-18--26	1409.		-166.0	R	117.9	R	250.0	79.	40.
S-18--27	845.		-212.0	R	117.0	R	286.0	148.	46.
S-18--28	643.		-186.0	R	113.9	R	252.0	137.	46.

LOAD CELL #1 LIFT (COUNTS) #2 MOMENT ABOUT MIDCHORD (COUNTS) #3 DRAG (COUNTS)  
PINF STATIC PRESSURE (MM HG) PCAV CAVITY PRESSURE (MM HG)  
RUN NO Q-XXI-YT: Q-POIL TESTED(S-SMALL,H-HED,L-LARGE)  
XXI=GEOMETRIC ATTACK ANGLE (DEGREES)  
YI=RUN NUMBER, THIS POIL @ THIS ANGLE

TR ROOM TEMPER (DEG FAHR)

TT TUNNEL " ( " )

AREA HALF-SPAN MODEL PLANFORM AREA (SQ IN)

SPAN FOIL HALF-SPAN (IN)

HAC MEAN CHORD, MEAS. @ MODEL CENTROID (IN)

MANOM VELOCITY MANOMETER READING (MM)

TWIST SHAFT TWIST (DEGREES/IN-LB)

S LOAD CELL POLARITY (N=NORMAL, R=REVERSE)



EXPER INVES OF WALL EFFECTS ON SUPERCavitATING HYDROFOILS OF FINITE SPAN

INPUT DATA CORRECTED FOR ZERO READINGS, SIGNS, AND HYDROSTATIC PRESSURE

BUN NO	MANOM	#1	#2	#3	PINP	PCAV
S-18.-01	1455.	-542.0	-33.9	-406.0	295.	91.
S-18.-02	1454.	-534.0	-33.9	-403.3	295.	89.
S-18.-03	1454.	-520.0	-32.3	-400.7	282.	86.
S-18.-04	1454.	-500.0	-31.1	-394.0	268.	79.
S-18.-05	1446.	-474.0	-30.0	-387.3	253.	75.
S-18.-06	1444.	-452.0	-29.0	-375.7	240.	71.
S-18.-07	1446.	-428.0	-28.2	-365.0	226.	67.
S-18.-08	1443.	-400.0	-27.8	-345.3	211.	61.
S-18.-09	1437.	-378.0	-27.0	-338.7	202.	59.
S-18.-10	1438.	-372.0	-26.8	-333.0	202.	58.
S-18.-11	1435.	-354.0	-26.4	-321.3	189.	55.
S-18.-12	1430.	-336.0	-25.7	-309.7	178.	52.
S-18.-13	1427.	-316.0	-24.9	-296.0	168.	47.
S-18.-14	1425.	-296.0	-24.5	-281.3	155.	44.
S-18.-15	1421.	-276.0	-23.6	-267.7	143.	43.
S-18.-16	1417.	-256.0	-22.7	-249.0	131.	41.
S-18.-17	1414.	-250.0	-22.5	-242.3	130.	40.
S-18.-18	1415.	-244.0	-22.0	-236.7	124.	40.
S-18.-19	1410.	-226.0	-21.5	-219.0	114.	40.
S-18.-20	1404.	-214.0	-20.5	-206.3	105.	40.
S-18.-21	1401.	-208.0	-20.4	-203.7	104.	40.
S-18.-22	1399.	-200.0	-19.9	-191.0	95.	40.
S-18.-23	1406.	-184.0	-18.5	-176.3	83.	40.
S-18.-24	1406.	-172.0	-18.2	-170.7	81.	40.
S-18.-25	1423.	-172.0	-17.7	-165.0	72.	40.
S-18.-26	1408.	-166.0	-17.2	-158.3	64.	40.
S-18.-27	845.	-212.0	-16.2	-194.7	133.	46.
S-18.-28	643.	-186.0	-13.1	-161.0	122.	46.



\*\*HYDROFOIL DATA REDUCTION\*\*

RUN NO	ALPHA	LIFT-LB	DRAG-LB	ROM-INLB	VEL-PPS
S-18.-01	18.00	54.91	16.36	12.75	28.19
S-18.-02	18.00	54.11	16.25	12.74	28.18
S-18.-03	18.00	52.68	16.15	12.17	28.18
S-18.-04	18.00	50.65	15.88	11.70	28.18
S-18.-05	18.00	48.03	15.61	11.28	28.11
S-18.-06	18.00	45.81	15.14	10.89	28.09
S-18.-07	18.00	43.39	14.71	10.62	28.11
S-18.-08	18.00	40.58	13.92	10.46	28.08
S-18.-09	18.00	38.36	13.65	10.14	28.03
S-18.-10	18.00	37.76	13.42	10.09	28.04
S-18.-11	18.00	35.95	12.95	9.93	28.01
S-18.-12	18.00	34.14	12.48	9.66	27.97
S-18.-13	18.00	32.12	11.93	9.38	27.94
S-18.-14	18.00	30.11	11.34	9.22	27.92
S-18.-15	18.00	28.09	10.79	8.87	27.88
S-18.-16	18.00	26.07	10.03	8.52	27.85
S-18.-17	18.00	25.47	9.77	8.47	27.82
S-18.-18	18.00	24.86	9.54	8.28	27.83
S-18.-19	18.00	23.05	8.83	8.08	27.78
S-18.-20	18.00	21.83	8.32	7.73	27.73
S-18.-21	18.00	21.23	8.21	7.68	27.70
S-18.-22	18.00	20.42	7.70	7.48	27.68
S-18.-23	18.00	18.79	7.11	6.98	27.75
S-18.-24	18.00	18.18	6.88	6.85	27.75
S-18.-25	18.00	17.57	6.65	6.65	27.90
S-18.-26	18.00	16.96	6.38	6.46	27.77
S-18.-27	18.00	21.54	7.85	6.11	21.89
S-18.-28	18.00	18.87	6.49	4.93	19.28

LEGEND VEL UPSTREAM VELOCITY (U)



••HYDROFOIL DATA IN NONDIMENSIONAL FORM (NO CORRECTIONS APPLIED)••

RUN NO	ALPHA	CL	CDUNC	CN	L/D	D/L	RM*10**6
S-18.-01	18.00	1.0300	0.2966	0.1190	3.4724	0.2890	0.5694
S-18.-02	18.00	1.0156	0.2948	0.1190	3.4451	0.2903	0.5692
S-18.-03	18.00	0.9887	0.2928	0.1136	3.3770	0.2961	0.5692
S-18.-04	18.00	0.9507	0.2877	0.1093	3.3041	0.3027	0.5692
S-18.-05	18.00	0.9061	0.2842	0.1059	3.1883	0.3137	0.5678
S-18.-06	18.00	0.8653	0.2757	0.1024	3.1386	0.3186	0.5674
S-18.-07	18.00	0.8186	0.2672	0.0997	3.0635	0.3264	0.5678
S-18.-08	18.00	0.7671	0.2528	0.0983	3.0348	0.3295	0.5672
S-18.-09	18.00	0.7280	0.2487	0.0958	2.9273	0.3416	0.5661
S-18.-10	18.00	0.7161	0.2442	0.0952	2.9325	0.3410	0.5663
S-18.-11	18.00	0.6831	0.2358	0.0939	2.8976	0.3451	0.5658
S-18.-12	18.00	0.6508	0.2276	0.0916	2.6593	0.3497	0.5648
S-18.-13	18.00	0.6135	0.2175	0.0892	2.8204	0.3546	0.5643
S-18.-14	18.00	0.5759	0.2065	0.0878	2.7885	0.3586	0.5639
S-18.-15	18.00	0.5387	0.1965	0.0846	2.7410	0.3648	0.5632
S-18.-16	18.00	0.5013	0.1826	0.0815	2.7451	0.3643	0.5624
S-18.-17	18.00	0.4907	0.1778	0.0812	2.7594	0.3624	0.5619
S-18.-18	18.00	0.4786	0.1733	0.0793	2.7616	0.3621	0.5621
S-18.-19	18.00	0.4452	0.1601	0.0776	2.7798	0.3597	0.5612
S-18.-20	18.00	0.4233	0.1509	0.0745	2.8047	0.3565	0.5600
S-18.-21	18.00	0.4124	0.1492	0.0742	2.7651	0.3616	0.5595
S-18.-22	18.00	0.3972	0.1394	0.0724	2.8487	0.3510	0.5591
S-18.-23	18.00	0.3638	0.1273	0.0672	2.8582	0.3499	0.5604
S-18.-24	18.00	0.3521	0.1229	0.0660	2.8654	0.3490	0.5604
S-18.-25	18.00	0.3365	0.1170	0.0634	2.8751	0.3478	0.5636
S-18.-26	18.00	0.3280	0.1131	0.0621	2.9003	0.3448	0.5608
S-18.-27	18.00	0.6699	0.2333	0.0945	2.8712	0.3483	0.4422
S-18.-26	18.00	0.7569	0.2493	0.0983	3.0357	0.3294	0.3894

LEGEND

ALPHA GEOMETRIC ANGLE OF ATTACK CORRECTED FOR SHAFT TWIST

CL LIFT COEFFICIENT, NONDIMENSIONALIZED ON UPSTREAM VELOCITY AND MODEL PLANFORM AREA  
CDUNC CD(UNCORRECTED), THE UNCORRECTED DRAG COEFFICIENT AS COMPUTED FROM MEASURED DRAG, AND NONDIMENSIONALIZED ON UPSTREAM VELOCITY AND MODEL PLANFORM AREA

CN MOMENT COEFFICIENT, NONDIMENSIONALIZED ON UPSTREAM VELOCITY, MODEL PLANFORM AREA, AND MEAN CHORD

L/D LIFT-TO-DRAG RATIO = CL/CDUNC

D/L DRAG-TO-LIFT RATIO = CDUNC/CL

RM REYNOLDS NUMBER, BASED ON MEAN CHORD





••PRIOR DATA CORRECTED FOR EFFECTS OF IMAGES OF TRAILING VORTEX SYSTEM••

RUN NO	ALPHAT	CL	CD	CM	(D/L)	SIGV/AT	SIGC/AT	CL/AT	CD/AT2	CM/AT	SIGV	SIGC	CAVLTH	COMMENTS/REMARKS
S-18--01	18.19	1.030	0.300	0.119	0.291	2.963	2.335	3.245	2.977	0.375	0.940	0.741	0.88	
S-18--02+	18.19	1.016	0.298	0.119	0.293	2.964	2.360	3.200	2.959	0.375	0.941	0.749	---	
S-18--03	18.18	0.989	0.296	0.114	0.299	2.814	2.246	3.116	2.939	0.358	0.893	0.713	0.89	
S-18--04	18.17	0.951	0.291	0.109	0.306	2.654	2.167	2.997	2.888	0.345	0.842	0.687	0.91	
S-18--05	18.17	0.906	0.287	0.106	0.317	2.494	2.053	2.858	2.853	0.334	0.791	0.651	0.92	
S-18--06	18.16	0.865	0.278	0.102	0.321	2.347	1.952	2.730	2.769	0.323	0.744	0.619	0.95	
S-18--07	18.15	0.819	0.269	0.100	0.329	2.183	1.835	2.584	2.684	0.315	0.691	0.581	0.97	
S-18--08	18.14	0.767	0.255	0.098	0.332	2.013	1.736	2.423	2.540	0.311	0.637	0.550	1.15	
S-18--09	18.13	0.728	0.250	0.096	0.344	1.914	1.662	2.300	2.500	0.303	0.606	0.526	1.20	
S-18--10+	18.13	0.716	0.246	0.095	0.343	1.914	1.673	2.263	2.455	0.301	0.606	0.529	---	
S-18--11	18.12	0.683	0.237	0.094	0.347	1.765	1.561	2.160	2.371	0.297	0.558	0.494	1.30	
S-18--12	18.12	0.651	0.229	0.092	0.352	1.642	1.473	2.058	2.289	0.290	0.519	0.466	1.35	
S-18--13	18.11	0.614	0.219	0.089	0.356	1.527	1.418	1.941	2.189	0.282	0.483	0.448	1.60	
S-18--14	18.11	0.576	0.208	0.080	0.360	1.376	1.303	1.823	2.079	0.278	0.435	0.412	1.80	
S-18--15	18.10	0.539	0.197	0.085	0.367	1.238	1.178	1.705	1.979	0.268	0.391	0.372	2.00	
S-18--16	18.09	0.501	0.183	0.082	0.366	1.099	1.064	1.588	1.839	0.258	0.347	0.336	2.05	
S-18--17+	18.09	0.491	0.179	0.081	0.364	1.088	1.066	1.554	1.791	0.257	0.343	0.337	---	
S-18--18	18.09	0.479	0.174	0.079	0.364	1.015	0.995	1.516	1.746	0.251	0.320	0.314	2.20	
S-18--19	18.08	0.445	0.161	0.078	0.361	0.899	0.880	1.411	1.614	0.246	0.284	0.278	2.80	
S-18--20	18.08	0.423	0.151	0.075	0.358	0.794	0.777	1.342	1.522	0.236	0.250	0.245	3.20	
S-18--21+	18.08	0.412	0.150	0.074	0.363	0.782	0.766	1.307	1.504	0.235	0.247	0.242	---	
S-18--22	18.07	0.397	0.140	0.072	0.352	0.674	0.660	1.259	1.406	0.229	0.213	0.208	5.10	
S-18--23	18.07	0.364	0.128	0.067	0.351	0.527	0.515	1.154	1.285	0.213	0.166	0.162	5.80	
S-18--24	18.06	0.352	0.123	0.066	0.350	0.502	0.491	1.117	1.240	0.209	0.158	0.155	7.20	
S-18--25	18.06	0.336	0.117	0.063	0.349	0.389	0.380	1.067	1.181	0.201	0.123	0.120	---	
S-18--26	18.06	0.328	0.113	0.062	0.346	0.296	0.289	1.041	1.142	0.197	0.093	0.091	---	
S-18--27	18.12	0.670	0.235	0.094	0.350	1.785	1.661	2.118	2.347	0.299	0.564	0.525	1.37	
S-18--28	18.14	0.757	0.251	0.098	0.332	2.027	1.871	2.391	2.506	0.311	0.642	0.592	0.98	

UNLESS OTHERWISE INDICATED, ALL DATA ARE FOR:

1. SUPERCAVITATING FLOW.
2. BOTH STATIC PRESSURE TAPS OPEN.

LEGEND

+ ONLY UPSTREAM STATIC PRESSURE TAP UTILIZED  
\* ONLY DNSTREAM STATIC PRESSURE TAP UTILIZED

PC PARTIALLY CAVITATING

PC(TW) PARTIALLY CAVITATING (TAP WETTED)

P# FULLY WETTED

AT (ALPHAT) (TRUE) ANGLE OF ATTACK, CORRECTED FOR EFFECTS OF IMAGES OF TRAILING VORTICES

AT2 ALPHAT\*\*2

SIGC CAVITATION NUMBER COMPUTED WITH MEASURED CAVITY PRESSURE

SIGV CAVITATION NUMBER COMPUTED WITH CALCULATED VAPOR PRESSURE

CD DRAG COEFFICIENT, CORRECTED FOR EFFECTS OF IMAGES OF TRAILING VORTICES

(D/L) CORRECTED DRAG-TO-LIFT RATIO = CD/CL

CAVLTH CAVITY LENGTH MEASURED FROM MIDCHORD AT CENTROID POSITION, NONDIMENSIONALIZED ON MEAN CHORD (OBTAINED FROM PHOTOGRAPHS)



## HYDROPOIL INPUT DATA

TR	TT	AREA	SPAN	HAC
78	94	10.0	5.0	2.01

ZERO READINGS AND TUNNEL TEMP BEFORE AND AFTER

NAME	1-R	2-R	3-R	TT
MAHON 1-N	1-R	2-R	3-R	TT

[illegible]

	95.0	98.0	100.7	0.0	0.0	0.0	0.0
	0.	0.	0.	0.	0.	0.	0.

CELL LES/CT(NORMAL/BBV) #1=0.10000 #2=0.02090 #3=0.04030

THWIST= 7200.0 SHAFT DIA. = 1.50 IN

\*\*\*INPUT DATA AS RECORDED\*\*

RUN NO	NAKOR	S	#1	#2	#3	PIMP	PCAN
S-21-01	1457.	-564.0	R	137.2	R	605.0	153.
S-21-02	1453.	-560.0	R	136.8	R	602.0	151.
S-21-03	1452.	-588.0	R	135.2	R	598.0	138.
S-21-04	1442.	-532.0	R	133.4	R	593.0	342.
S-21-05	1439.	-512.0	R	131.4	R	584.0	324.
S-21-06	1436.	-488.0	R	130.1	R	573.0	304.
S-21-07	1434.	-466.0	R	128.9	R	564.0	284.
S-21-08	1429.	-448.0	R	128.9	R	559.0	270.
S-21-09	1422.	-452.0	R	128.7	R	557.0	270.
S-21-10	1418.	-432.0	R	128.1	R	543.0	256.
S-21-11	1416.	-432.0	R	128.1	R	543.0	255.
S-21-12	1411.	-412.0	R	127.8	R	528.0	241.
S-21-13	1410.	-388.0	R	127.1	R	515.0	226.
S-21-14	1412.	-364.0	R	126.6	R	495.0	211.
S-21-15	1408.	-358.0	R	126.4	R	493.0	211.
S-21-16	1408.	-342.0	R	126.0	R	477.0	198.
S-21-17	1405.	-316.0	R	125.5	R	459.0	183.
S-21-18	1400.	-298.0	R	124.6	R	440.0	170.
S-21-19	1399.	-282.0	R	123.6	R	420.0	160.
S-21-20	1397.	-266.0	R	123.1	R	400.0	145.
S-21-21	1395.	-254.0	R	122.9	R	385.0	139.
S-21-22	1394.	-240.0	R	122.4	R	372.0	130.
S-21-23	1389.	-236.0	R	127.3	R	365.0	130.
S-21-24	1388.	-230.0	R	122.0	R	360.0	122.
S-21-25	1390.	-220.0	R	121.2	R	346.0	116.
S-21-26	1390.	-208.0	R	120.4	R	331.0	106.
S-21-27	1394.	-198.0	R	119.6	R	324.0	100.
S-21-28	1396.	-194.0	R	119.1	R	315.0	94.
S-21-29	780.	-126.0	R	112.2	R	237.0	94.
S-21-30	602.	-156.0	R	113.1	R	255.0	124.
LEGEND	TR	TEMPER (DEG FAHR)					LOAD CELL #1 LINE

	TR ROOM TEMPER (DEG FAHR)	LOAD CELL #1 LIPT (COUNTS)	NIDCHORD (COUNTS)
TT TUNNEL "	" "	#2 MOMENT ABOUT	

AREA HALF-SPAN MODEL PLANFORM AREA (SQ IN)

SPAN FOIL HALF-SPAN (IN)

MAC MEAN CHORD, MEAS. @ MODEL CENTROID (IN)

ANOM VELOCITY MANOMETER READING (MM)

WIST SHAFT TWIST (DEGREES/IN-LB)

S LOAD CELL POLARITY (N=NORMAL, R=REVERSE)

PINP STATIC PRESSURE (MM HG)

PCAV CAVITY PRESSURE (MM HG)

M NO Q-XXI-YY: Q=POIL TEST8

**XXI=GEOMETRIC**

YY=RUN NUMBER

PUMP STATIC PRESSURE (MM HG)

PCAV CAVITY PRESSURE (MM HG)

M NO Q-XXX-YY: Q=POIL TESTED(S=SMALL, H=MED, L=LARGE)

**XXI=GEOMETRIC ATTACK ANGLE (DEGREES)**

YY=RUN NUMBER, THIS POLL @ THIS ANGLE



ZEPHYR INVEES OF WALL EFFECTS ON SUPERCavitating HYDROFOILS OF FINITE SPAN

INPUT DATA CORRECTED FOR ZERO READINGS, SIGNS, AND HYDROSTATIC PRESSURE

ROW NO	BARON	#1	#2	#3	PIMF	PCAV
S-21--01	1457.	-564.0	-37.2	-505.0	360.	153.
S-21--02	1453.	-560.0	-36.8	-502.1	360.	151.
S-21--03	1452.	-548.0	-35.2	-498.1	344.	138.
S-21--04	1442.	-532.0	-33.3	-493.2	327.	122.
S-21--05	1439.	-512.0	-31.3	-484.3	309.	109.
S-21--06	1436.	-488.0	-30.0	-473.3	289.	99.
S-21--07	1424.	-466.0	-28.8	-464.4	269.	89.
S-21--08	1429.	-448.0	-28.7	-459.5	255.	81.
S-21--09	1422.	-452.0	-28.5	-457.6	255.	80.
S-21--10	1418.	-432.0	-27.9	-443.6	241.	75.
S-21--11	1416.	-432.0	-27.9	-443.7	240.	75.
S-21--12	1411.	-412.0	-27.5	-428.8	226.	71.
S-21--13	1410.	-388.0	-26.8	-415.8	211.	64.
S-21--14	1412.	-364.0	-26.3	-395.9	196.	58.
S-21--15	1408.	-358.0	-26.1	-394.0	196.	56.
S-21--16	1408.	-342.0	-25.6	-378.0	183.	53.
S-21--17	1405.	-316.0	-25.1	-360.1	168.	49.
S-21--18	1400.	-298.0	-24.2	-341.2	155.	47.
S-21--19	1399.	-282.0	-23.2	-321.2	145.	45.
S-21--20	1397.	-266.0	-22.6	-301.3	130.	44.
S-21--21	1395.	-254.0	-22.4	-286.4	124.	43.
S-21--22	1394.	-240.0	-21.9	-273.4	115.	43.
S-21--23	1389.	-236.0	-26.8	-266.5	115.	43.
S-21--24	1388.	-230.0	-21.4	-261.6	107.	43.
S-21--25	1390.	-220.0	-20.6	-247.7	101.	43.
S-21--26	1390.	-208.0	-19.8	-232.7	91.	43.
S-21--27	1394.	-198.0	-19.0	-225.8	85.	43.
S-21--28	1396.	-194.0	-18.4	-216.9	79.	43.
S-21--29	780.	-126.0	-11.5	-138.9	79.	43.
S-21--30	602.	-156.0	-12.4	-167.0	109.	41.



\*\*HYDROPOIL DATA REDUCTION\*\*

RUN NO	ALPHA	LIFT-LB	DRAG-LB	NON-IMLB	VEL-PPS
S-21.-01	21.00	57.18	20.35	13.99	28.21
S-21.-02	21.00	56.77	20.23	13.84	28.18
S-21.-03	21.00	55.53	20.07	13.22	28.17
S-21.-04	21.00	53.90	19.88	12.54	28.08
S-21.-05	21.00	51.85	19.52	11.78	28.05
S-21.-06	21.00	49.43	19.08	11.28	28.02
S-21.-07	21.00	47.20	18.72	10.82	28.01
S-21.-08	21.00	45.40	18.52	10.81	27.96
S-21.-09	21.00	45.80	18.44	10.72	27.90
S-21.-10	21.00	43.78	17.88	10.49	27.86
S-21.-11	21.00	43.78	17.88	10.48	27.84
S-21.-12	21.00	41.78	17.28	10.36	27.80
S-21.-13	21.00	39.36	16.76	10.09	27.79
S-21.-14	21.00	36.95	15.95	9.89	27.81
S-21.-15	21.00	36.34	15.88	9.80	27.77
S-21.-16	21.00	34.74	15.23	9.64	27.77
S-21.-17	21.00	32.12	14.51	9.45	27.74
S-21.-18	21.00	30.31	13.75	9.10	27.70
S-21.-19	21.00	28.68	12.95	8.71	27.69
S-21.-20	21.00	27.07	12.14	8.52	27.67
S-21.-21	21.00	25.87	11.54	8.43	27.65
S-21.-22	21.00	24.46	11.02	8.24	27.64
S-21.-23	21.00	24.16	10.74	10.07	27.59
S-21.-24	21.00	23.45	10.54	8.07	27.58
S-21.-25	21.00	22.43	9.98	7.76	27.60
S-21.-26	21.00	21.21	9.38	7.45	27.60
S-21.-27	21.00	20.20	9.10	7.14	27.64
S-21.-28	21.00	19.79	8.74	6.94	27.66
S-21.-29	21.00	12.84	5.60	4.34	21.10
S-21.-30	21.00	15.86	6.73	4.66	18.70

LEGEND VEL UPSTREAM VELOCITY (U)





\*\*\*HYDROFOIL DATA IN NONDIMENSIONAL FORM (NO CORRECTIONS APPLIED)\*\*\*

SUM NO	ALPHA	CL	CDUNC	CH	L/D	D/L	RM*10**6
S-21.-01	21.00	1.0712	0.3710	0.1304	2.8873	0.3463	0.5788
S-21.-02	21.00	1.0663	0.3698	0.1293	2.8837	0.3468	0.5781
S-21.-03	21.00	1.0438	0.3670	0.1237	2.8438	0.3516	0.5779
S-21.-04	21.00	1.0195	0.3657	0.1180	2.7878	0.3587	0.5761
S-21.-05	21.00	0.9828	0.3596	0.1110	2.7329	0.3659	0.5755
S-21.-06	21.00	0.9386	0.3520	0.1066	2.6668	0.3750	0.5750
S-21.-07	21.00	0.8975	0.3456	0.1023	2.5970	0.3851	0.5746
S-21.-08	21.00	0.8661	0.3429	0.1026	2.5253	0.3960	0.5736
S-21.-09	21.00	0.8776	0.3431	0.1022	2.5581	0.3909	0.5723
S-21.-10	21.00	0.8412	0.3332	0.1003	2.5246	0.3961	0.5716
S-21.-11	21.00	0.8423	0.3337	0.1003	2.5241	0.3962	0.5712
S-21.-12	21.00	0.8064	0.3232	0.0995	2.4947	0.4008	0.5703
S-21.-13	21.00	0.7603	0.3134	0.0969	2.4259	0.4122	0.5701
S-21.-14	21.00	0.7127	0.2975	0.0949	2.3960	0.4174	0.5705
S-21.-15	21.00	0.7029	0.2968	0.0943	2.3686	0.4222	0.5697
S-21.-16	21.00	0.6718	0.2844	0.0928	2.3626	0.4233	0.5697
S-21.-17	21.00	0.6226	0.2709	0.0911	2.2978	0.4352	0.5691
S-21.-18	21.00	0.5892	0.2570	0.0880	2.2925	0.4362	0.5682
S-21.-19	21.00	0.5581	0.2416	0.0844	2.3101	0.4329	0.5680
S-21.-20	21.00	0.5274	0.2263	0.0826	2.3311	0.4290	0.5676
S-21.-21	21.00	0.5047	0.2148	0.0819	2.3489	0.4257	0.5673
S-21.-22	21.00	0.4774	0.2048	0.0800	2.3310	0.4290	0.5671
S-21.-23	21.00	0.4732	0.2001	0.0981	2.3652	0.4228	0.5661
S-21.-24	21.00	0.4596	0.1963	0.0787	2.3410	0.4272	0.5659
S-21.-25	21.00	0.4391	0.1850	0.0755	2.3726	0.4215	0.5663
S-21.-26	21.00	0.4152	0.1733	0.0725	2.3964	0.4173	0.5663
S-21.-27	21.00	0.3943	0.1673	0.0693	2.3562	0.4244	0.5671
S-21.-28	21.00	0.3857	0.1601	0.0673	2.4096	0.4150	0.5674
S-21.-29	21.00	0.4303	0.1769	0.0723	2.4323	0.4111	0.4328
S-21.-30	21.00	0.6763	0.2761	0.0990	2.4494	0.4083	0.3837

LEGEND

ALPHA GEOMETRIC ANGLE OF ATTACK CORRECTED FOR SHAFT TWIST  
 CL LIFT COEFFICIENT, NONDIMENSIONALIZED ON UPSTREAM VELOCITY AND MODEL PLANFORM AREA  
 CDUNC CL (UNCORRECTED), THE UNCORRECTED DRAG COEFFICIENT AS COMPUTED FROM MEASURED DRAG, AND NONDIMENSIONALIZED ON UPSTREAM VELOCITY AND MODEL PLANFORM AREA  
 CH MOMENT COEFFICIENT, NONDIMENSIONALIZED ON UPSTREAM VELOCITY, MODEL PLANFORM AREA, AND MEAN CHORD  
 L/D LIFT-TO-DRAG RATIO = CL/CDUNC  
 D/L DRAG-TO-LIFT RATIO = CDUNC/CL  
 RM REYNOLDS NUMBER, BASED ON MEAN CHORD



\*\*PRIOR DATA CORRECTED FOR EFFECTS OF IMAGES OF TRAILING VORTEX SYSTEM\*\*

RUN NO	ALPHAT	CL	CD	CH	(D/L)	SIGV/AT	SIGC/AT	CL/AT	CD/AT2	CH/AT	SIGV	SIGC	CAVLTH	COMMENTS/REMARKS
S-21--01	21.20	1.071	0.375	0.130	0.350	3.141	2.031	2.896	2.738	0.353	1.162	0.751	0.83	
S-21--02+	21.19	1.066	0.373	0.129	0.350	3.149	2.056	2.883	2.728	0.350	1.165	0.760	---	
S-21--03+	21.19	1.044	0.370	0.124	0.355	2.993	2.028	2.822	2.708	0.334	1.107	0.750	0.80	
S-21--04+	21.19	1.020	0.369	0.118	0.362	2.844	2.032	2.757	2.699	0.319	1.052	0.751	0.85	
S-21--05+	21.18	0.983	0.363	0.111	0.369	2.671	1.987	2.659	2.654	0.300	0.987	0.734	0.95	
S-21--06+	21.17	0.939	0.355	0.107	0.378	2.478	1.892	2.540	2.598	0.288	0.916	0.699	0.98	
S-21--07+	21.16	0.897	0.348	0.102	0.388	2.282	1.795	2.430	2.552	0.277	0.843	0.663	1.00	
S-21--08+	21.16	0.866	0.345	0.103	0.399	2.149	1.742	2.345	2.532	0.278	0.794	0.643	1.02	
S-21--09	21.16	0.878	0.345	0.102	0.394	2.158	1.760	2.376	2.533	0.277	0.797	0.650	1.10	
S-21--10	21.15	0.841	0.335	0.100	0.399	2.022	1.674	2.279	2.461	0.272	0.747	0.618	1.16	
S-21--11	21.15	0.842	0.336	0.100	0.399	2.014	1.666	2.282	2.465	0.272	0.744	0.615	1.18	
S-21--12	21.15	0.806	0.325	0.099	0.403	1.879	1.571	2.185	2.388	0.270	0.693	0.580	1.19	
S-21--13	21.14	0.760	0.315	0.097	0.415	1.728	1.492	2.061	2.316	0.263	0.638	0.550	1.35	
S-21--14	21.13	0.713	0.299	0.095	0.420	1.574	1.399	1.933	2.199	0.257	0.580	0.516	1.40	
S-21--15+	21.13	0.703	0.298	0.094	0.424	1.577	1.424	1.906	2.194	0.256	0.582	0.525	---	
S-21--16	21.12	0.672	0.286	0.093	0.425	1.445	1.322	1.822	2.103	0.252	0.533	0.488	1.50	
S-21--17	21.11	0.623	0.272	0.091	0.437	1.295	1.214	1.689	2.004	0.247	0.477	0.447	1.65	
S-21--18	21.11	0.589	0.258	0.088	0.438	1.166	1.106	1.599	1.902	0.239	0.430	0.407	1.90	
S-21--19	21.10	0.558	0.243	0.084	0.435	1.064	1.025	1.515	1.788	0.229	0.392	0.378	2.25	
S-21--20	21.10	0.527	0.227	0.083	0.431	0.911	0.884	1.433	1.675	0.224	0.336	0.325	2.60	
S-21--21	21.09	0.505	0.206	0.082	0.427	0.850	0.834	1.371	1.591	0.222	0.313	0.307	3.10	
S-21--22	21.09	0.477	0.206	0.080	0.430	0.758	0.742	1.297	1.517	0.217	0.279	0.273	3.00	
S-21--23+	21.09	0.473	0.201	0.098	0.424	0.760	0.745	1.286	1.482	0.267	0.280	0.274	---	
S-21--24	21.08	0.460	0.197	0.079	0.429	0.677	0.663	1.249	1.455	0.214	0.249	0.244	3.90	
S-21--25	21.08	0.439	0.186	0.076	0.423	0.614	0.600	1.193	1.372	0.205	0.226	0.221	5.80	
S-21--26	21.08	0.415	0.174	0.073	0.419	0.510	0.497	1.129	1.285	0.197	0.188	0.183	6.40	
S-21--27	21.07	0.394	0.168	0.069	0.426	0.446	0.435	1.072	1.241	0.188	0.164	0.160	6.80	
S-21--28	21.07	0.386	0.161	0.067	0.416	0.383	0.373	1.049	1.187	0.183	0.141	0.137	---	
S-21--29	21.08	0.430	0.177	0.072	0.412	0.657	0.640	1.170	1.311	0.196	0.242	0.236	5.30	
S-21--30	21.12	0.676	0.278	0.099	0.410	1.503	1.529	1.834	2.042	0.268	0.554	0.564	1.25	

UNLESS OTHERWISE INDICATED, ALL DATA ARE FOR:

1. SUPERCavitating FLOW.
2. BOTH STATIC PRESSURE TAPS OPEN.

LEGEND

- + ONLY UPSTREAM STATIC PRESSURE TAP UTILIZED
- \* ONLY DNSTREAM STATIC PRESSURE TAP UTILIZED

PC PARTIALLY CAVITATING

PC(TW) PARTIALLY CAVITATING (TAP WETTED)

PW FULLY WETTED

AT (ALPHAT) (TRUE) ANGLE OF ATTACK, CORRECTED FOR EFFECTS OF IMAGES OF TRAILING VORTICES

AT2 ALPHAT\*\*2

SIGC CAVITATION NUMBER COMPUTED WITH MEASURED CAVITY PRESSURE

SIGV CAVITATION NUMBER COMPUTED WITH CALCULATED VAPOR PRESSURE

CD DRAG COEFFICIENT, CORRECTED FOR EFFECTS OF IMAGES OF TRAILING VORTICES

(D/L) CORRECTED DRAG-TO-LIFT RATIO = CD/CL

CAVLTH CAVITY LENGTH MEASURED FROM MIDCHORD AT CENTROID POSITION, NONDIMENSIONALIZED ON MEAN CHORD (OBTAINED FROM PHOTOGRAPHS)



HYDROFOIL INPUT DATA  
 TB TT AREA SPAN GAC  
 73 81 40.0 10.0 0.02

ZERO READINGS AND TUNNEL TEMP BEFORE AND AFTER

MANOM 1-M 1-R 2-M 2-R 3-M 3-R TT  
 0. 0.0 0.0 100.0 0.0 0.0 100.0 80.0  
 0. 0.0 0.0 99.0 0.0 0.0 100.0 82.0  
 CELL LBS/CT(NORMAL/REV) #1=0.20000 #2=0.20000 #3=0.04030  
 TWIST= 7200.0 SHAFT DIA.= 1.50IN  
 \*\*INPUT DATA AS RECORDED\*\*

RUN NO	MANOM	S	#1	S	#2	S	#3	PINP	PCAV
R-8.0-01	1417.		-560.0	N	86.5	R	543.0	172.	28.
R-8.0-02	1396.		-500.0	N	87.5	R	530.0	157.	28.
R-8.0-03	1376.		-430.0	N	88.0	R	505.0	141.	28.
R-8.0-04	1370.		-362.0	N	88.5	R	467.0	124.	28.
R-8.0-05	1367.		-303.0	N	89.0	R	423.0	109.	28.
R-8.0-06	1373.		-236.0	N	90.0	R	370.0	90.	29.
R-8.0-07	1385.		-212.0	N	90.5	R	347.0	81.	29.

LEGEND  
 TR BOOM TEMPER (DEG FAHR)  
 TT TUNNEL " " "  
 AREA HALF-SPAN MODEL PLANFORM AREA (SQ IN)  
 SPAN FOIL HALF-SPAN (IN)  
 MAC MEAN CHORD, MEAS. @ MODEL CENTROID(IN)  
 MANOM VELOCITY MANOMETER READING (MM)  
 TWIST SHAFT TWIST (DEGREES/IN-LB)  
 S LOAD CELL POLARITY (N=NORMAL, R=REVERSE)

LOAD CELL #1 LIPT (COUNTS)  
 #2 MOMENT ABOUT MIDCHORD (COUNTS)  
 #3 DRAG (COUNTS)  
 PINP STATIC PRESSURE (MM HG)  
 PCAV CAVITY PRESSURE (MM HG)  
 SUN NO Q-XXX-YY: Q=FOIL TESTED (S=SMALL, M=MED, L=LARGE)  
 XXX=GEOMETRIC ATTACK ANGLE (DEGREES)  
 YY=RUN NUMBER, THIS FOIL @ THIS ANGLE



INPUT DATA CORRECTED FOR ZERO READINGS, SIGNS, AND HYDROSTATIC PRESSURE

RUN NO	MAXON	#1	#2	#3	PUMP	PCAV
X-8.0-01	1417.	-566.0	-13.5	-443.0	161.	28.
X-8.0-02	1396.	-500.0	-12.3	-430.0	146.	28.
X-8.0-03	1376.	-430.0	-11.7	-405.0	130.	28.
X-8.0-04	1370.	-362.0	-11.0	-367.0	113.	28.
X-8.0-05	1367.	-303.0	-10.3	-323.0	98.	28.
X-8.0-06	1373.	-236.0	-9.2	-270.0	79.	29.
X-8.0-07	1355.	-212.0	-8.5	-247.0	70.	29.





KIPER INVES OF BALL EFFECTS ON SUPERCAVITATING HYDROFOILS OF FINITE SPAN

\*\*HYDROFOIL DATA REDUCTION\*\*

ROW NO	ALPHA	LIFT-LB	DRAG-LB	MOM-INLB	VEL-FPS
A-8.0-01	8.01	115.90	17.85	48.60	27.86
A-8.0-02	8.01	102.47	17.33	44.40	27.67
A-8.0-03	8.01	88.33	16.32	42.00	27.48
A-8.0-04	8.01	74.60	14.79	39.60	27.43
A-8.0-05	8.01	62.67	13.02	37.20	27.40
A-8.0-06	8.00	49.03	10.88	33.00	27.45
A-8.0-07	8.00	44.10	9.95	30.60	27.57

LEGEND VEL UPSTREAM VELOCITY (U)



ZIPER INVES OF BALL EFFECTS ON SUPERCavitating HYDROFOILS OF FINITE SPAN

\*\*HYDROFOIL DATA IN NONDIMENSIONAL FORM (NO CORRECTIONS APPLIED)\*\*

RUN NO	ALPHA	CL	CDUNC	CM	L/D	D/L	RM*10**6
R-8.0-01	8.01	0.5557	0.0801	0.0580	6.9393	0.1141	1.0184
R-8.0-02	8.01	0.4981	0.0787	0.0537	6.3279	0.1580	1.0114
R-8.0-03	8.01	0.4352	0.0749	0.0515	5.8117	0.1721	1.0046
R-8.0-04	8.01	0.3691	0.0676	0.0487	5.4563	0.1833	1.0025
R-8.0-05	8.01	0.3107	0.0590	0.0459	5.2656	0.1899	1.0015
R-8.0-06	8.00	0.2421	0.0482	0.0405	5.0234	0.1991	1.0036
R-8.0-07	8.00	0.2160	0.0432	0.0373	4.9968	0.2001	1.0076

LEGEND

ALPHA GEOMETRIC ANGLE OF ATTACK CORRECTED FOR SHAFT TWIST  
 CL LIFT COEFFICIENT, NONDIMENSIONALIZED ON UPSTREAM VELOCITY AND MODEL PLATFORM AREA  
 CDUNC CD(UNCORRECTED), THE UNCORRECTED DRAG COEFFICIENT AS COMPUTED FROM MEASURED DRAG, AND NONDIMENSIONALIZED ON UPSTREAM VELOCITY AND MODEL PLATFORM AREA  
 CM MOMENT COEFFICIENT, NONDIMENSIONALIZED ON UPSTREAM VELOCITY, MODEL PLATFORM AREA, AND MEAN CHORD  
 L/D LIFT-TO-DRAG RATIO = CL/CDUNC  
 D/L DRAG-TO-LIFT RATIO = CDUNC/CL  
 RM REYNOLDS NUMBER, BASED ON MEAN CHORD



••PRIOR DATA CORRECTED FOR EFFECTS OF IMAGES OF TRAILING VORTEX SYSTEM••

RUN NO	ALPHAT	CL	CD	CM	(D/L)	SIGV/AT	SIGC/AT	CL/AT	CD/AT2	CM/AT	SIGV	SIGC	CAVLTH	COMMENTS/REMARKS
R-8-0-01	8.34	0.556	0.083	0.058	0.150	3.443	3.397	3.819	3.933	0.398	0.501	0.498	0.60	
R-8-0-02	8.30	0.498	0.081	0.054	0.163	3.109	3.070	3.438	3.872	0.371	0.451	0.445	0.62	
R-8-0-03	8.27	0.435	0.077	0.051	0.177	2.735	2.703	3.017	3.694	0.357	0.395	0.390	0.75	
R-8-0-04	8.23	0.369	0.069	0.049	0.187	2.298	2.274	2.571	3.351	0.339	0.330	0.326	0.85	
R-8-0-05	8.19	0.311	0.060	0.046	0.193	1.903	1.886	2.173	2.936	0.321	0.272	0.270	1.14	
R-8-0-06	8.15	0.242	0.049	0.041	0.202	1.386	1.351	1.702	2.413	0.285	0.197	0.192	1.75	
R-8-0-07	8.13	0.216	0.044	0.037	0.202	1.130	1.102	1.522	2.169	0.263	0.160	0.156	2.55	

UNLESS OTHERWISE INDICATED, ALL DATA ARE FOR:

1. SUPERCAVITATING FLOW.
2. BOTH STATIC PRESSURE TAPS OPEN.

LEGEND

- \* ONLY UPSTREAM STATIC PRESSURE TAP UTILIZED
- \* ONLY DNSTREAM STATIC PRESSURE TAP UTILIZED

PC PARTIALLY CAVITATING

PC(TV) PARTIALLY CAVITATING (TAP WETTED)

FW FULLY WETTED

AT (ALPHAT) (TRUE) ANGLE OF ATTACK, CORRECTED FOR EFFECTS OF IMAGES OF TRAILING VORTICES

AT2 ALPHAT\*2

SIGC CAVITATION NUMBER COMPUTED WITH MEASURED CAVITY PRESSURE

SIGV CAVITATION NUMBER COMPUTED WITH CALCULATED VAPOR PRESSURE

CD DRAG COEFFICIENT, CORRECTED FOR EFFECTS OF IMAGES OF TRAILING VORTICES

(D/L) CORRECTED DRAG-TO-LIFT RATIO = CD/CL

CAVLTH CAVITY LENGTH MEASURED FROM MIDCHORD AT CENTROID POSITION, NONDIMENSIONALIZED ON MEAN CHORD (OBTAINED FROM PHOTOGRAPHS)



EXPER INVEK OF WALL EFFECTS ON SUPERCAVITATING HYDROFOILS OF FINITE SPAN

HYDROFOIL INPUT DATA

TR TT AREA SPAN HAC  
72 78 40.0 10.0 4.02

ZERO READINGS AND TUNNEL TEMP BEFORE AND AFTER

HANOM 1-M 1-R 2-M 2-R 3-M 3-R TT

0. 0.0 0.0 0.0 100.0 0.0 100.0 76.0

0. 0.0 0.0 0.0 99.0 0.0 105.0 80.0

CELL LBS/CT(NORMAL/REV) #1=0.20000 #2=0.20000 #3=0.04030

TWIST= 7200.0 SHAFT DIA.= 1.50 IN

\*\*INPUT DATA AS RECORDED\*\*

RUN NO	HANOM	S	#1	S	#2	S	#3	PINP	PCAV
M-9.5-01	1363.		-715.0	R	117.0	R	660.0	193.	34.
M-9.5-02	1360.		-640.0	R	115.0	R	645.0	177.	34.
M-9.5-03	1357.		-580.0	R	114.5	R	625.0	163.	34.
M-9.5-04	1359.		-505.0	R	114.0	R	590.0	145.	34.
M-9.5-05	1353.		-440.0	R	113.0	R	551.0	132.	32.
M-9.5-06	1346.		-370.0	R	112.0	R	500.0	116.	30.
M-9.5-07	1346.		-322.0	R	111.0	R	460.0	103.	30.
M-9.5-08	1353.		-265.0	R	110.0	R	413.0	87.	30.
M-9.5-09	1355.		-250.0	R	109.5	R	398.0	80.	30.

LEGEND

TR ROOM TEMPER (DEG FAHR)

TT TUNNEL " ( " " )

AREA HALF-SPAN MODEL PLANFORM AREA (SQ IN)

SPAN FOIL HALF-SPAN (IN)

HAC HAN CHORD, MEAS. & MODEL CENTROID (IN)

HANOM VELOCITY MANOMETER READING (MM)

TWIST SHAFT TWIST (DEGREES/IN-LB)

S LOAD CELL POLARITY (N=NORMAL, R=REVERSE)

LOAD CELL #1 LIPT (COUNTS)

#2 MOMENT ABOUT MIDCHORD (COUNTS)

#3 DRAG (COUNTS)

PINP STATIC PRESSURE (MM HG)

PCAV CAVITY PRESSURE (MM HG)

RUN NO Q-XXX-YY: Q=FOIL TESTED(S=SMALL, N=MED, L=LARGE)

XXX=GEOMETRIC ATTACK ANGLE (DEGREES)

YY=RUN NUMBER, THIS FOIL & THIS ANGLE





INPUT DATA CORRECTED FOR ZERO READINGS, SIGNS, AND HYDROSTATIC PRESSURE

RUN NO	RAMON	#1	#2	#3	PIMP	PCAV
R-9.5-01	1363.	-715.0	-17.0	-560.0	182.	34.
R-9.5-02	1360.	-640.0	-15.1	-544.4	166.	34.
R-9.5-03	1357.	-580.0	-14.8	-523.7	152.	34.
R-9.5-04	1359.	-505.0	-14.4	-488.1	134.	34.
R-9.5-05	1353.	-440.0	-13.5	-448.5	121.	32.
R-9.5-06	1346.	-370.0	-12.6	-395.9	105.	30.
R-9.5-07	1346.	-322.0	-11.8	-356.2	92.	30.
R-9.5-08	1353.	-265.0	-10.9	-308.6	76.	30.
R-9.5-09	1355.	-250.0	-10.5	-293.0	69.	30.



EXPER INVES OF WALL EFFECTS ON SUPERCAVITATING HYDROFOILS OF FINITE SPAN

\*\*HYDROFOIL DATA REDUCTION\*\*

RUN NO	ALPHA	LIFT-LB	DRAG-LB	MOM-INLB	VEL-FPS
R-9.5-01	9.51	186.80	22.57	61.20	27.36
R-9.5-02	9.51	131.02	21.94	54.45	27.33
R-9.5-03	9.51	118.95	21.11	53.10	27.31
R-9.5-04	9.51	103.87	19.67	51.75	27.32
R-9.5-05	9.51	90.70	18.07	48.60	27.27
R-9.5-06	9.51	76.52	15.99	45.45	27.20
R-9.5-07	9.51	66.75	14.36	42.30	27.20
R-9.5-08	9.51	55.17	12.44	39.15	27.27
R-9.5-09	9.51	52.10	11.81	37.80	27.29

LEGEND VEL UPSTREAM VELOCITY (U)



\*\*HYDROFOIL DATA IN NONDIMENSIONAL FORM (NO CORRECTIONS APPLIED)\*\*

RUN NO	ALPHA	CL	CDUNC	CM	L/D	D/L	RE*10**6
8-9-5-01	9.51	0.7274	0.1066	0.0756	6.8254	0.1465	0.9686
8-9-5-02	9.51	0.6523	0.1037	0.0674	6.2927	0.1589	0.9676
8-9-5-03	9.51	0.5934	0.0997	0.0659	5.9497	0.1681	0.9666
8-9-5-04	9.51	0.5175	0.0924	0.0641	5.5980	0.1786	0.9672
8-9-5-05	9.51	0.4537	0.0849	0.0605	5.3469	0.1870	0.9652
8-9-5-06	9.51	0.3847	0.0748	0.0568	5.1402	0.1945	0.9629
8-9-5-07	9.51	0.3355	0.0666	0.0529	5.0376	0.1985	0.9629
8-9-5-08	9.51	0.2760	0.0567	0.0487	4.8715	0.2053	0.9652
8-9-5-09	9.51	0.2603	0.0534	0.0470	4.8715	0.2053	0.9659

LEGEND

ALPHA GEOMETRIC ANGLE OF ATTACK CORRECTED FOR SHAFT TWIST  
 CL LIFT COEFFICIENT, NONDIMENSIONALIZED ON UPSTREAM VELOCITY AND MODEL PLANFORM AREA  
 CDUNC CD(UNCORRECTED), THE UNCORRECTED DRAG COEFFICIENT AS COMPUTED FROM MEASURED DRAG, AND NONDIMENSIONALIZED ON UPSTREAM VELOCITY AND MODEL PLANFORM AREA  
 CM MOMENT COEFFICIENT, NONDIMENSIONALIZED ON UPSTREAM VELOCITY, MODEL PLANFORM AREA, AND MEAN CHORD  
 L/D LIFT-TO-DRAG RATIO = CL/CDUNC  
 D/L DRAG-TO-LIFT RATIO = CDUNC/CL  
 RE REYNOLDS NUMBER, BASED ON MEAN CHORD



\*\*PRIOR DATA CORRECTED FOR EFFECTS OF IMAGES OF TRAILING VORTEX SYSTEM\*\*

RUN NO	ALPHAT	CL	CD	CM	(D/L)	SIGV/AT	SIGC/AT	CL/AT	CD/AT2	CM/AT	SIGV	SIGC	CAVLTH	COMMENTS/REMARKS
R-9.5-01	9.94	0.727	0.112	0.076	0.154	3.529	3.285	4.192	3.722	0.436	0.612	0.570	0.63	
R-9.5-02	9.90	0.652	0.108	0.067	0.166	3.187	2.950	3.777	3.623	0.390	0.551	0.510	0.65	
R-9.5-03	9.86	0.593	0.103	0.066	0.174	2.883	2.653	3.448	3.491	0.383	0.496	0.457	0.80	
R-9.5-04	9.82	0.518	0.095	0.064	0.184	2.478	2.256	3.021	3.245	0.374	0.425	0.387	0.89	
R-9.5-05	9.78	0.454	0.087	0.060	0.192	2.194	2.025	2.659	2.988	0.354	0.374	0.346	1.00	
R-9.5-06	9.74	0.385	0.076	0.057	0.199	1.839	1.723	2.264	2.645	0.334	0.312	0.293	1.35	
R-9.5-07	9.71	0.336	0.068	0.053	0.202	1.536	1.430	1.981	2.362	0.312	0.260	0.242	1.55	
R-9.5-08	9.67	0.276	0.057	0.049	0.208	1.158	1.061	1.635	2.017	0.289	0.195	0.179	2.25	
R-9.5-09	9.66	0.260	0.054	0.047	0.208	0.987	0.901	1.544	1.904	0.279	0.166	0.152	3.25	

UNLESS OTHERWISE INDICATED, ALL DATA ARE FOR:

1. SUPERCavitating FLOW.
2. BOTH STATIC PRESSURE TAPS OPEN.

LEGEND

- + ONLY UPSTREAM STATIC PRESSURE TAP UTILIZED
- \* ONLY DNSTREAM STATIC PRESSURE TAP UTILIZED
- PC PARTIALLY CAVITATING
- PC(TV) PARTIALLY CAVITATING (TAP WETTED)
- PM FULLY WETTED
- AT (ALPHAT) (TRUE) ANGLE OF ATTACK, CORRECTED FOR EFFECTS OF IMAGES OF TRAILING VORTICES
- AT2 ALPHAT\*\*2
- SIGC CAVITATION NUMBER COMPUTED WITH MEASURED CAVITY PRESSURE
- SIGV CAVITATION NUMBER COMPUTED WITH CALCULATED VAPOR PRESSURE
- CD DRAG COEFFICIENT, CORRECTED FOR EFFECTS OF IMAGES OF TRAILING VORTICES
- (D/L) CORRECTED DRAG-TO-LIFT RATIO = CD/CL
- CAVLTH CAVITY LENGTH MEASURED FROM MIDCHORD AT CENTROID POSITION, NONDIMENSIONALIZED ON MEAN CHORD (OBTAINED FROM PHOTOGRAPHS)





EXPER INVES OF WALL EFFECTS ON SUPERCAVITATING HYDROFOILS OF FINITE SPAN

HYDROFOIL INPUT DATA

TR TT AREA SPAN MAC  
74 85 40.0 10.0 4.02

ZERO READINGS AND TUNNEL TEMP BEFORE AND AFTER

MANOM 1-N 1-R 2-S 2-R 3-N 3-R TT  
0. 0.0 0.0 0.0 100.0 0.0 100.0 83.0  
0. 2.0 0.0 0.0 101.0 0.0 103.0 87.0  
CELL LES/CT (NORMAL/REV) #1=0.20000 #2=0.20000 #3=0.04030  
TWIST= 7200.0 SHAFT DIA.= 1.50IN

\*\*INPUT DATA AS RECORDED\*\*

RUN NO	MANOM	S	#1	S	#2	S	#3	PINF	PCAV	PC
M-11.-01	1447.		-810.0	R	134.3	R	728.0	272.	191.	
M-11.-02	1439.		-856.0	R	129.0	R	775.0	257.	82.	
M-11.-03	1438.		-886.0	R	123.5	R	826.0	243.	52.	
M-11.-04	1425.		-846.0	R	121.0	R	833.0	228.	48.	
M-11.-05	1416.		-790.0	R	119.5	R	825.0	214.	45.	
M-11.-06	1407.		-724.0	R	118.5	R	803.0	199.	44.	
M-11.-07	1400.		-654.0	R	118.0	R	767.0	183.	43.	
M-11.-08	1397.		-576.0	R	117.0	R	723.0	166.	41.	
M-11.-09	1390.		-512.0	R	116.0	R	677.0	150.	39.	
M-11.-10	1388.		-446.0	R	115.5	R	617.0	137.	33.	
M-11.-11	1383.		-396.0	R	114.5	R	568.0	124.	33.	
M-11.-12	1377.		-346.0	R	114.0	R	525.0	112.	32.	
M-11.-13	1377.		-306.0	R	113.0	R	482.0	97.	32.	
M-11.-14	1380.		-290.0	R	112.8	R	466.0	91.	32.	
M-11.-15	1377.		-746.0	R	135.0	R	675.0	288.	---	PC (TW)
M-11.-16	1378.		-726.0	R	134.5	R	682.0	317.	---	PC (TW)
M-11.-17	1373.		-698.0	R	132.0	R	680.0	658.	---	PW
M-11.-18	692.		-366.0	R	117.0	R	410.0	745.	---	PW
M-11.-19	360.		-194.0	R	110.0	R	265.0	785.	---	PW

LOAD CELL #1 LIFT (COUNTS) #2 MOMENT ABOUT MIDCHORD (COUNTS)  
#3 DRAG (COUNTS)  
PINP STATIC PRESSURE (MM HG)  
PCAV CAVITY PRESSURE (MM HG)  
RUN NO Q-XXI-YY: Q=FOIL TESTED (S=SMALL, N=MED, L=LARGE)  
XX=GEOMETRIC ATTACK ANGLE (DEGREES)  
YY=RUN NUMBER, THIS FOIL @ THIS ANGLE

TR ROOM TEMPER (DEG FAHR)

TT TUNNEL " ( " )

AREA HALF-SPAN MODEL PLANFORM AREA (SQ IN)

SPAN FOIL HALF-SPAN (IN)

MAC MEAN CHORD, MEAS. @ MODEL CENTROID (IN)

MANOM VELOCITY MANOMETER READING (MM)

TWIST SHAFT TWIST (DEGREES/IN-LB)

S LOAD CELL POLARITY (N=NORMAL, R=REVERSE)



EXPER INVES OF BALL EFFECTS ON SUPERCAVITATING HYDROFOILS OF FINITE SPAN

INPUT DATA CORRECTED FOR ZERO READINGS, SIGNS, AND HYDROSTATIC PRESSURE

RUN NO	HAUX	#1	#2	#3	PIN?	PCAV
M-11.-01	1447.	-810.0	-34.3	-628.0	261.	191.
M-11.-02	1439.	-856.1	-28.9	-674.8	246.	82.
M-11.-03	1438.	-886.2	-23.4	-725.7	232.	52.
M-11.-04	1425.	-846.3	-20.8	-732.5	217.	48.
M-11.-05	1416.	-790.4	-19.3	-724.3	203.	45.
M-11.-06	1407.	-724.6	-18.2	-702.2	188.	44.
M-11.-07	1400.	-654.7	-17.7	-666.0	172.	43.
M-11.-08	1397.	-576.8	-16.6	-621.8	155.	41.
M-11.-09	1390.	-512.9	-15.6	-575.7	139.	39.
M-11.-10	1388.	-447.0	-15.0	-515.5	126.	33.
M-11.-11	1383.	-397.1	-13.9	-466.3	113.	33.
M-11.-12	1377.	-347.2	-13.4	-423.2	101.	32.
M-11.-13	1377.	-307.3	-12.3	-380.0	86.	32.
M-11.-14	1380.	-291.4	-12.1	-363.8	80.	32.
M-11.-15	1377.	-747.6	-34.2	-572.7	277.	---
M-11.-16	1378.	-727.7	-33.7	-579.5	306.	---
M-11.-17	1373.	-699.8	-31.1	-577.3	647.	---
M-11.-18	692.	-367.9	-16.1	-307.2	734.	---
M-11.-19	360.	-196.0	-9.0	-162.0	774.	---



EXPER INVES OF WALL EFFECTS ON SUPERCavitating HYDROFOILS OF FINITE SPAN

\*\*HYDROFOIL DATA REDUCTION\*\*

RUN NO	ALPHA	LIFT-LB	DRAG-LB	MON-INLB	VEL-PPS
A-11-01	11.02	168.86	25.31	123.98	28.13
A-11-02	11.01	177.01	27.20	104.20	28.06
A-11-03	11.01	181.92	29.24	84.20	28.05
A-11-04	11.01	173.43	29.52	75.00	27.93
A-11-05	11.01	161.94	29.19	69.40	27.85
A-11-06	11.01	148.56	28.30	65.60	27.77
A-11-07	11.01	134.47	26.84	63.60	27.71
A-11-08	11.01	118.68	25.06	59.80	27.68
A-11-09	11.01	105.69	23.20	56.00	27.61
A-11-10	11.01	92.40	20.77	54.00	27.59
A-11-11	11.01	82.21	18.79	50.20	27.55
A-11-12	11.01	72.12	17.05	48.20	27.49
A-11-13	11.01	63.93	15.31	44.40	27.49
A-11-14	11.01	60.70	14.66	43.48	27.52
A-11-15	11.02	156.36	23.08	123.20	27.49
A-11-16	11.02	152.27	23.35	121.20	27.50
A-11-17	11.02	146.18	23.27	112.00	27.46
A-11-18	11.01	76.79	12.38	57.80	19.96
A-11-19	11.00	41.00	6.53	32.40	14.73

LEGEND VEL UPSTREAM VELOCITY (U)



\*\*HYDROFOIL DATA IN NONDIMENSIONAL FORM (NO CORRECTIONS APPLIED)\*\*

RUN NO	ALPHA	CL	CDUNC	CM	L/D	D/L	BN*10**6
M-11--01	11-02	0.7944	0.1136	0.1445	6.9940	0.1430	1.0697
M-11--02	11-01	0.8370	0.1231	0.1226	6.7986	0.1471	1.0669
M-11--03	11-01	0.8608	0.1329	0.0991	6.4774	0.1544	1.0666
M-11--04	11-01	0.8276	0.1354	0.0890	6.1132	0.1636	1.0621
M-11--05	11-01	0.7774	0.1346	0.0829	5.7740	0.1732	1.0589
M-11--06	11-01	0.7173	0.1311	0.0788	5.4696	0.1829	1.0558
M-11--07	11-01	0.6523	0.1247	0.0767	5.2306	0.1912	1.0533
M-11--08	11-01	0.5769	0.1163	0.0723	4.9594	0.2016	1.0523
M-11--09	11-01	0.5161	0.1078	0.0680	4.7879	0.2089	1.0498
M-11--10	11-01	0.4519	0.0961	0.0657	4.7021	0.2127	1.0491
M-11--11	11-01	0.4034	0.0867	0.0613	4.6518	0.2150	1.0474
M-11--12	11-01	0.3553	0.0785	0.0591	4.5253	0.2210	1.0453
M-11--13	11-01	0.3150	0.0699	0.0544	4.5030	0.2221	1.0453
M-11--14	11-01	0.2985	0.0666	0.0532	4.4819	0.2231	1.0463
M-11--15	11-02	0.7703	0.1082	0.1510	7.1192	0.1405	1.0453
M-11--16	11-02	0.7496	0.1095	0.1484	6.8474	0.1460	1.0456
M-11--17	11-02	0.7221	0.1094	0.1376	6.5985	0.1516	1.0438
M-11--18	11-01	0.7176	0.1099	0.1344	6.5280	0.1532	0.7589
M-11--19	11-00	0.7038	0.1061	0.1384	6.6360	0.1507	0.5599

LEGEND

ALPHA GEOMETRIC ANGLE OF ATTACK CORRECTED FOR SHAFT TWIST

CL LIFT COEFFICIENT, NONDIMENSIONALIZED ON UPSTREAM VELOCITY AND MODEL PLANFORM AREA

CDUNC CL(UNCORRECTED), THE UNCORRECTED DRAG COEFFICIENT AS COMPUTED FROM MEASURED DRAG, AND NONDIMENSIONALIZED ON UPSTREAM VELOCITY AND MODEL PLANFORM AREA

CM MOMENT COEFFICIENT, NONDIMENSIONALIZED ON UPSTREAM VELOCITY, MODEL PLANFORM AREA, AND MEAN CHORD

L/D LIFT-TO-DRAG RATIO = CL/CDUNC

D/L DRAG-TO-LIFT RATIO = CDUNC/CL

BN REYNOLDS NUMBER, BASED ON MEAN CHORD





EXPER INVES OF WALL EFFECTS ON SUPERCAVITATING HYDROFOILS OF FINITE SPAN

\*\*PRIOR DATA CORRECTED FOR EFFECTS OF IMAGES OF TRAILING VORTEX SYSTEM\*\*

BUN NO	ALPHAT	CL	CD	CM	(D/L)	SIGV/AT	SIGC/AT	CL/AT	CD/AT2	CM/AT	SIGV	SIGC	CAVLTH	COMMENTS/REMARKS
M-11-01	11.49	0.794	0.120	0.145	0.151	4.217	1.276	3.961	2.987	0.721	0.846	0.256	0.66	PC
M-11-02	11.51	0.837	0.130	0.123	0.156	3.954	2.991	4.166	3.230	0.610	0.795	0.301	0.65	
M-11-03	11.52	0.861	0.141	0.099	0.163	3.694	3.281	4.280	3.475	0.493	0.743	0.660	0.63	
M-11-04	11.50	0.828	0.143	0.089	0.172	3.452	3.113	4.122	3.535	0.443	0.693	0.625	0.64	
M-11-05	11.47	0.777	0.141	0.083	0.181	3.219	2.935	3.882	3.514	0.414	0.644	0.598	0.66	
M-11-06	11.44	0.717	0.137	0.079	0.190	2.963	2.700	3.594	3.426	0.395	0.591	0.539	0.66	
M-11-07	11.40	0.652	0.129	0.077	0.198	2.681	2.439	3.279	3.263	0.386	0.533	0.485	0.72	
M-11-08	11.35	0.577	0.120	0.072	0.208	2.371	2.169	2.912	3.051	0.365	0.470	0.430	0.79	
M-11-09	11.32	0.516	0.111	0.068	0.214	2.079	1.919	2.614	2.835	0.344	0.411	0.379	0.93	
M-11-10	11.28	0.452	0.098	0.066	0.217	1.835	1.793	2.296	2.536	0.334	0.361	0.353	1.10	
M-11-11	11.25	0.403	0.088	0.061	0.219	1.591	1.553	2.055	2.294	0.312	0.312	0.305	1.40	
M-11-12	11.22	0.355	0.080	0.059	0.225	1.363	1.349	1.815	2.082	0.302	0.267	0.264	1.75	
M-11-13	11.19	0.315	0.071	0.054	0.225	1.069	1.059	1.612	1.860	0.279	0.209	0.207	2.80	
M-11-14	11.18	0.298	0.068	0.053	0.226	0.947	0.941	1.529	1.772	0.272	0.185	0.184	3.25	
M-11-15	11.43	0.770	0.114	0.151	0.146	-----	-----	3.846	2.851	0.754	-----	-----	-----	PC (TW)
M-11-16	11.46	0.750	0.115	0.148	0.154	-----	-----	3.747	2.881	0.742	-----	-----	-----	PC (TW)
M-11-17	11.45	0.722	0.115	0.138	0.159	-----	-----	3.615	2.878	0.689	-----	-----	-----	PW
M-11-18	11.44	0.718	0.115	0.134	0.161	-----	-----	3.596	2.894	0.673	-----	-----	-----	PW
M-11-19	11.42	0.704	0.111	0.138	0.158	-----	-----	3.530	2.798	0.694	-----	-----	-----	PW

UNLESS OTHERWISE INDICATED, ALL DATA ARE FOR:

1. SUPERCAVITATING FLOW.
2. BOTH STATIC PRESSURE TAPS OPEN.

LEGEND

\* ONLY UPSTREAM STATIC PRESSURE TAP UTILIZED

\* ONLY DNSTREAM STATIC PRESSURE TAP UTILIZED

PC PARTIALLY CAVITATING

PC(TW) PARTIALLY CAVITATING (TAP WETTED)

PW FULLY WETTED

AT (ALPHAT) (TRUE) ANGLE OF ATTACK, CORRECTED FOR EFFECTS OF IMAGES OF TRAILING VORTICES

AT2 ALPHAT\*\*2

SIGC CAVITATION NUMBER COMPUTED WITH MEASURED CAVITY PRESSURE

SIGV CAVITATION NUMBER COMPUTED WITH CALCULATED VAPOR PRESSURE

CD DRAG COEFFICIENT, CORRECTED FOR EFFECTS OF IMAGES OF TRAILING VORTICES

(D/L) CORRECTED DRAG-TO-LIFT RATIO = CD/CL

CAVLTH CAVITY LENGTH MEASURED FROM MIDCHORD AT CENTROID POSITION, NONDIMENSIONALIZED ON MEAN CHORD

(OBTAINED FROM PHOTOGRAPHS)



HYDROFOIL INPUT DATA

TR TT AREA SPAN HAC  
78 95 40.0 10.0 4.02

ZERO READINGS AND TUNNEL TEMP BEFORE AND AFTER

HANOM 1-R 1-R 2-R 2-R 3-R 3-R TT

0. 0.0 0.0 0.0 100.0 0.0 100.0 94.0

0. 0.0 0.0 0.0 100.5 0.0 100.0 96.0

CELL LBS/CT(NORMAL/REV) #1=0.20000 #2=0.20000 #3=0.04030

THIST= 7200.0 SHAFT DIA.= 1.50IN

\*\*INPUT DATA AS RECORDED\*\*

RUN NO	HANOM	S	#1	S	#2	S	#3	PINP	PCAV
M-12.-01	1297.		-830.0	R	121.0	R	890.0	235.	63.
M-12.-02	1287.		-748.0	R	119.0	R	870.0	220.	59.
M-12.-03	1282.		-682.0	R	118.0	R	832.0	203.	55.
M-12.-04	1277.		-590.0	R	117.0	R	770.0	181.	53.
M-12.-05	1276.		-508.0	R	116.0	R	708.0	161.	49.
M-12.-06	1271.		-434.0	R	115.0	R	638.0	146.	44.
M-12.-07	1270.		-402.0	R	114.5	R	598.0	133.	43.
M-12.-08	1272.		-348.0	R	113.8	R	547.0	119.	43.
M-12.-09	1272.		-312.0	R	113.0	R	507.0	109.	43.
M-12.-10	1274.		-296.0	R	112.5	R	487.0	109.	44.
M-12.-11	1267.		-326.0	R	113.2	R	523.0	108.	44.
M-12.-12	1275.		-292.0	R	112.5	R	483.0	101.	44.
M-12.-13	1278.		-282.0	R	112.3	R	470.0	90.	44.
M-12.-14	1273.		-292.0	R	112.5	R	480.0	89.	44.

LEGEND

TR ROOM TEMPER (DEG FAHR)

TT TUNNEL " (" " " )

AREA HALF-SPAN MODEL PLATFORM AREA (SQ IN)

SPAN POIL HALF-SPAN (IN)

HAC HAN CHORD, MEAS. @ MODEL CENTROID (IN)

HANOM VELOCITY MANOMETER READING (MM)

THIST SHAFT THIST (DEGREES/IN-LB)

S LOAD CELL POLARITY (N-NORMAL, R-REVERSE)

LOAD CELL #1 LIPT (COUNTS)

#2 MOMENT ABOUT MIDCHORD (COUNTS)

#3 DRAG (COUNTS)

PINP STATIC PRESSURE (MM HG)

PCAV CAVITY PRESSURE (MM HG)

RUN NO Q-III-YT: Q-FOIL TESTED(S-SHALL, R-MED, L-LARGE)

III-GEOMETRIC ATTACK ANGLE (DEGREES)

YT-RUN NUMBER, THIS FOIL @ THIS ANGLE



EXPER INVES OF WALL EFFECTS ON SUPERCavitATING HYDROFOILS OF FINITE SPAN

INPUT DATA CORRECTED FOR ZERO READINGS, SIGNS, AND HYDROSTATIC PRESSURE

RUN NO	MANOM	#1	#2	#3	PINP	PCAV
M-12.-01	1297.	-830.0	-21.0	-790.0	224.	63.
M-12.-02	1287.	-748.0	-19.0	-770.0	209.	59.
M-12.-03	1282.	-682.0	-17.9	-732.0	192.	55.
M-12.-04	1277.	-590.0	-16.9	-670.0	170.	53.
M-12.-05	1276.	-508.0	-15.8	-608.0	150.	49.
M-12.-06	1271.	-434.0	-14.8	-538.0	135.	44.
M-12.-07	1270.	-402.0	-14.3	-498.0	122.	43.
M-12.-08	1272.	-348.0	-13.5	-447.0	108.	41.
M-12.-09	1272.	-312.0	-12.7	-407.0	98.	43.
M-12.-10	1274.	-296.0	-12.2	-387.0	98.	44.
M-12.-11	1267.	-326.0	-12.8	-423.0	97.	44.
M-12.-12	1275.	-292.0	-12.1	-383.0	90.	44.
M-12.-13	1278.	-282.0	-11.8	-370.0	79.	44.
M-12.-14	1273.	-292.0	-12.0	-380.0	78.	44.



EXPERIMENTS OF WALL EFFECTS ON SUPERCavitating HYDROFOILS OF FINITE SPAN

\*\*HYDROFOIL DATA REDUCTION\*\*

EXP NO	ALPHA	LIFT-LB	DRAG-LB	NON-INLB	VEL-PPS
E-12--01	12.01	170.20	31.84	75.60	26.73
E-12--02	12.01	153.39	31.03	68.26	26.63
E-12--03	12.01	139.98	29.50	64.52	26.59
E-12--04	12.01	121.38	27.00	60.78	26.54
E-12--05	12.01	104.77	24.50	57.05	26.53
E-12--06	12.01	89.76	21.68	53.31	26.48
E-12--07	12.01	83.25	20.07	51.37	26.47
E-12--08	12.01	72.31	18.01	48.71	26.49
E-12--09	12.01	64.94	16.40	45.69	26.49
E-12--10	12.01	61.63	15.60	43.75	26.51
E-12--11	12.01	67.76	17.05	46.14	26.44
E-12--12	12.01	60.82	15.43	43.48	26.52
E-12--13	12.01	58.77	14.91	42.62	26.55
E-12--14	12.01	60.80	15.31	43.20	26.50

LEGEND VEL UPSTREAM VELOCITY (U)





\*\*HYDROFOIL DATA IN NONDIMENSIONAL FORM (NO CORRECTIONS APPLIED)\*\*

RUN NO	ALPHA	CL	CDUNC	CM	L/D	D/L	RE*10**6
R-12-01	12.01	0.8883	0.1607	0.0982	5.5274	0.1809	1.1051
R-12-02	12.01	0.8064	0.1577	0.0893	5.1143	0.1955	1.1011
R-12-03	12.01	0.7386	0.1502	0.0847	4.9178	0.2033	1.0992
R-12-04	12.01	0.6427	0.1375	0.0801	4.6738	0.2140	1.0972
R-12-05	12.01	0.5552	0.1244	0.0752	4.4636	0.2240	1.0968
R-12-06	12.01	0.4774	0.1098	0.0705	4.3459	0.2301	1.0948
R-12-07	12.01	0.4431	0.1014	0.0680	4.3719	0.2287	1.0944
R-12-08	12.01	0.3843	0.0903	0.0644	4.2567	0.2349	1.0952
R-12-09	12.01	0.3451	0.0817	0.0604	4.2238	0.2368	1.0952
R-12-10	12.01	0.3271	0.0773	0.0578	4.2308	0.2364	1.0960
R-12-11	12.01	0.3615	0.0855	0.0612	4.2292	0.2365	1.0932
R-12-12	12.01	0.3225	0.0764	0.0574	4.2218	0.2369	1.0964
R-12-13	12.01	0.3110	0.0734	0.0561	4.2342	0.2362	1.0976
R-12-14	12.01	0.3229	0.0759	0.0571	4.2560	0.2350	1.0956

LEGEND

ALPHA GEOMETRIC ANGLE OF ATTACK CORRECTED FOR SHAFT TWIST

CL LIFT COEFFICIENT, NONDIMENSIONALIZED ON UPSTREAM VELOCITY AND MODEL PLANFORM AREA

CDUNC CD(CUNC-CORRECTED), THE UNCORRECTED DRAG COEFFICIENT AS COMPUTED FROM MEASURED DRAG, AND NONDIMENSIONALIZED

ON UPSTREAM VELOCITY AND MODEL PLANFORM AREA

CM MOMENT COEFFICIENT, NONDIMENSIONALIZED ON UPSTREAM VELOCITY, MODEL PLANFORM AREA, AND MEAN CHORD

L/D LIFT-TO-DRAG RATIO = CL/CDUNC

D/L DRAG-TO-LIFT RATIO = CDUNC/CL

RE REYNOLDS NUMBER, BASED ON MEAN CHORD



\*\*PRIOR DATA CORRECTED FOR EFFECTS OF IMAGES OF TRAILING VORTEX SYSTEM\*\*

RUN NO	ALPHAT	CL	CD	CM	(D/L)	SIGV/AT	SIGC/AT	CL/AT	CD/AT2	CH/AT	SIGV	SIGC	CAVLTH	COMMENTS/REMARKS
E-12--01	12.54	0.888	0.169	0.098	0.190	3.384	2.975	4.059	3.526	0.448	0.741	0.651	0.65	
E-12--02	12.49	0.806	0.164	0.089	0.204	3.138	2.804	3.699	3.460	0.409	0.684	0.611	0.69	
E-12--03	12.45	0.739	0.156	0.085	0.211	2.837	2.579	3.399	3.301	0.390	0.616	0.560	0.71	
E-12--04	12.39	0.643	0.142	0.080	0.221	2.440	2.222	2.972	3.032	0.370	0.528	0.480	0.82	
E-12--05	12.34	0.555	0.128	0.075	0.230	2.068	1.928	2.578	2.751	0.349	0.445	0.415	0.98	
E-12--06	12.29	0.477	0.112	0.071	0.235	1.792	1.751	2.225	2.438	0.329	0.384	0.376	1.12	
E-12--07	12.27	0.443	0.103	0.068	0.233	1.542	1.524	2.069	2.254	0.318	0.330	0.326	1.55	
E-12--08	12.24	0.384	0.092	0.064	0.239	1.271	1.257	1.799	2.013	0.302	0.271	0.268	1.62	
E-12--09	12.21	0.385	0.083	0.060	0.240	1.077	1.067	1.619	1.826	0.283	0.230	0.227	2.69	
E-12--10*	12.20	0.327	0.078	0.058	0.240	1.073	1.047	1.536	1.729	0.271	0.228	0.223	3.57	
E-12--11*	12.22	0.361	0.087	0.061	0.240	1.053	1.031	1.694	1.908	0.287	0.225	0.220	----	
E-12--12	12.20	0.322	0.077	0.057	0.240	0.910	0.892	1.515	1.709	0.269	0.194	0.190	----	
E-12--13	12.19	0.311	0.074	0.056	0.239	0.693	0.679	1.461	1.644	0.264	0.147	0.144	4.65	
E-12--14*	12.20	0.323	0.077	0.057	0.238	0.672	0.662	1.517	1.698	0.268	0.143	0.141	----	

UNLESS OTHERWISE INDICATED, ALL DATA ARE FOR:

1. SUPERCAVITATING FLOW.
2. BOTH STATIC PRESSURE TAPS OPEN.

LEGEND

\* ONLY UPSTREAM STATIC PRESSURE TAP UTILIZED

\* ONLY DOWNSTREAM STATIC PRESSURE TAP UTILIZED

PC PARTIALLY CAVITATING

PC(TB) PARTIALLY CAVITATING (TAP WETTED)

FW FULLY WETTED

AT (ALPHAT) (TRUE) ANGLE OF ATTACK, CORRECTED FOR EFFECTS OF IMAGES OF TRAILING VORTICES

AT2 ALPHAT\*2

SIGC CAVITATION NUMBER COMPUTED WITH MEASURED CAVITY PRESSURE

SIGV CAVITATION NUMBER COMPUTED WITH CALCULATED VAPOR PRESSURE

CD DRAG COEFFICIENT, CORRECTED FOR EFFECTS OF IMAGES OF TRAILING VORTICES

(D/L) CORRECTED DRAG-TO-LIFT RATIO = CD/CL

CAVLTH CAVITY LENGTH MEASURED FROM MIDCHORD AT CENTROID POSITION, NONDIMENSIONALIZED ON MEAN CHORD (OBTAINED FROM PHOTOGRAPHS)



EXPER INVES OF WALL EFFECTS ON SUPERCavitating HYDROFOILS OF FINITE SPAN

HYDROFOIL INPUT DATA

TR TT AREA SPAN SAC  
77 90 40.0 10.0 4.02

ZERO REACTIONS AND TUNNEL TEMP BEFORE AND AFTER

BARON 1-R 1-R 2-R 3-R 3-R TT  
0. 0.0 0.0 0.0 100.0 0.0 100.0 87.0  
0. 0.0 0.0 0.0 99.5 0.0 110.0 92.0

CELL LBS/CT(NORMAL/REV) #1=0.20000 #2=0.20000 #3=0.04030  
TWIST= 7200.0 SHAFT DIA.= 1.50IN

\*\*INPUT DATA AS RECORDED\*\*

ROW NO	BARON	S	#1	S	#2	S	#3	PINP	PCAV	PV	PC(TW)	PC(TW)
B-14.-01	802.	-550.0	R	127.0	R	617.0	R	722.	----	PV	----	----
B-14.-02	1183.	-790.0	R	139.0	R	846.0	R	676.	----	PV	----	----
B-14.-03	1526.	-996.0	R	149.5	R	1045.0	R	638.	----	PC(TW)	----	----
B-14.-04	1430.	-956.0	R	147.5	R	988.0	R	449.	----	PC(TW)	----	----
B-14.-05	1413.	-968.0	R	146.5	R	988.0	R	395.	----	PC(TW)	----	----
B-14.-06	1409.	-1000.0	R	143.0	R	1045.0	R	357.	----	PC(TW)	----	----
B-14.-07	1397.	-1062.0	R	133.4	R	1175.0	R	318.	136.	----	----	----
B-14.-08	1380.	-1042.0	R	127.4	R	1204.0	R	293.	87.	----	----	----
B-14.-09	1381.	-1005.0	R	125.0	R	1209.0	R	279.	77.	----	----	----
B-14.-10	1375.	-950.0	R	123.0	R	1195.0	R	264.	69.	----	----	----
B-14.-11	1372.	-890.0	R	122.0	R	1170.0	R	248.	64.	----	----	----
B-14.-12	1366.	-828.0	R	121.0	R	1135.0	R	234.	62.	----	----	----
B-14.-13	1361.	-754.0	R	120.0	R	1075.0	R	216.	55.	----	----	----
B-14.-14	1362.	-696.0	R	119.5	R	1025.0	R	203.	53.	----	----	----
B-14.-15	1358.	-640.0	R	118.6	R	973.0	R	189.	50.	----	----	----
B-14.-16	1359.	-578.0	R	118.0	R	912.0	R	173.	46.	----	----	----
B-14.-17	1357.	-534.0	R	117.5	R	860.0	R	160.	41.	----	----	----
B-14.-18	1353.	-452.0	R	116.0	R	762.0	R	136.	39.	----	----	----
B-14.-19	1352.	-396.0	R	115.0	R	688.0	R	118.	39.	----	----	----
B-14.-20	1353.	-366.0	R	114.5	R	650.0	R	109.	39.	----	----	----
B-14.-21	455.	-260.0	R	107.0	R	443.0	R	110.	45.	----	----	----
B-14.-22	988.	-600.0	R	115.6	R	859.0	R	185.	55.	----	----	----
B-14.-23	992.	-664.0	R	132.6	R	735.0	R	704.	----	PV	----	----

LOAD CELL #1 LIPT (COUNTS) #2 MOMENT ABOUT MIDCHORD (COUNTS) #3 DRAG (COUNTS)  
PINP STATIC PRESSURE (MM HG) PCAV CAVITY PRESSURE (MM HG)  
RUN NO Q-XXX-YY: Q=FOIL TESTED(S=SMALL,M=MED,L=LARGE)  
XXX=GEOMETRIC ATTACK ANGLE (DEGREES)  
YY=ROW NUMBER, THIS FOIL & THIS ANGLE

TR ROOM TEMPER (DEG FAHR)

TT TUNNEL " ( " )

AREA HALF-SPAN MODEL PLANFORM AREA (SQ IN)

SPAN FOIL HALF-SPAN (IN)

HAC MEAN CHORD, MEAS. & MODEL CENTROID(IN)

BARON VELOCITY MANOMETER READING (MM)

TWIST SHAFT TWIST (DEGREES/IN-LB)

S LOAD CELL POLARITY (N-NORMAL, R-REVERSE)

LEGEND



EXPER INVES OF WALL EFFECTS ON SUPERCAVITATING HYDROFOILS OF FINITE SPAN

INPUT DATA CORRECTED FOR ZERO READINGS, SIGNS, AND HYDROSTATIC PRESSURE

RUN NO	HANON	#1	#2	#3	PIMP	PCAV
R-14.-01	802.	-550.0	-27.0	-517.0	711.	----
R-14.-02	1183.	-790.0	-39.0	-745.5	665.	----
R-14.-03	1526.	-996.0	-49.5	-944.1	627.	----
R-14.-04	1430.	-956.0	-47.6	-886.6	438.	----
R-14.-05	1413.	-968.0	-46.6	-882.2	384.	----
R-14.-06	1409.	-1000.0	-43.1	-942.7	346.	----
R-14.-07	1397.	-1062.0	-33.5	-1072.3	307.	136.
R-14.-08	1380.	-1042.0	-27.6	-1100.8	282.	87.
R-14.-09	1381.	-1004.0	-25.2	-1105.4	268.	77.
R-14.-10	1375.	-950.0	-23.2	-1090.9	253.	69.
R-14.-11	1372.	-890.0	-22.2	-1065.5	237.	64.
R-14.-12	1366.	-828.0	-21.2	-1030.0	223.	62.
R-14.-13	1361.	-754.0	-20.3	-969.5	205.	55.
R-14.-14	1362.	-696.0	-19.8	-919.1	192.	53.
R-14.-15	1358.	-640.0	-18.9	-866.6	178.	50.
R-14.-16	1359.	-578.0	-18.3	-805.2	162.	46.
R-14.-17	1357.	-534.0	-17.9	-752.7	149.	41.
R-14.-18	1353.	-452.0	-16.4	-654.3	125.	39.
R-14.-19	1352.	-396.0	-15.4	-579.8	107.	39.
R-14.-20	1353.	-366.0	-14.9	-541.4	98.	39.
R-14.-21	455.	-260.0	-7.5	-333.9	99.	45.
R-14.-22	988.	-600.0	-16.1	-749.5	174.	55.
R-14.-23	992.	-664.0	-33.1	-625.0	693.	----





••HYDROFOIL DATA REDUCTION••

SUN NO	ALPHA	LIFT-LB	DRAG-LB	MOH-INLB	VEL-PPS
A-14.-01	14.01	115.40	20.84	97.20	21.37
A-14.-02	14.02	165.80	30.05	140.48	25.61
A-14.-03	14.02	209.11	38.05	178.36	28.83
A-14.-04	14.02	250.71	35.73	171.25	27.97
A-14.-05	14.02	262.92	35.55	167.73	27.81
A-14.-06	14.02	208.62	37.99	155.21	27.78
A-14.-07	14.02	219.11	43.21	120.73	27.67
A-14.-08	14.01	213.91	44.36	99.21	27.51
A-14.-09	14.01	205.84	44.55	90.65	27.52
A-14.-10	14.01	194.64	43.96	83.54	27.46
A-14.-11	14.01	182.45	42.94	80.02	27.44
A-14.-12	14.01	169.85	41.51	76.50	27.38
A-14.-13	14.01	154.85	39.07	72.98	27.33
A-14.-14	14.01	143.16	37.04	71.26	27.34
A-14.-15	14.01	131.78	34.93	68.11	27.30
A-14.-16	14.01	119.27	32.45	66.03	27.31
A-14.-17	14.01	110.37	30.33	64.31	27.30
A-14.-18	14.01	93.68	26.37	58.99	27.26
A-14.-19	14.01	82.28	23.37	55.47	27.25
A-14.-20	14.01	76.19	21.82	53.75	27.26
A-14.-21	14.00	53.49	13.46	26.84	16.42
A-14.-22	14.01	123.22	30.20	57.88	23.55
A-14.-23	14.02	139.42	25.19	119.16	23.59

LEGEND VEL UPSTREAM VELOCITY (U)



\*\*HYDROFOIL DATA IN NONDIMENSIONAL FORM (NO CORRECTIONS APPLIED)\*\*

RUN NO	ALPHA	CL	CDUNC	CH	L/D	D/L	RE*10**-6
H-18.-01	18.01	0.9015	0.1643	0.1973	5.7296	0.1785	0.8493
H-18.-02	18.02	0.9422	0.1652	0.1986	5.7028	0.1754	1.0176
H-18.-03	18.03	0.9376	0.1652	0.1989	5.6767	0.1762	1.1456
H-18.-04	18.02	0.9561	0.1648	0.2029	5.8031	0.1723	1.1115
H-18.-05	18.02	0.9778	0.1658	0.2010	5.8954	0.1696	1.1053
H-18.-06	18.02	1.0075	0.1780	0.1865	5.6595	0.1767	1.1039
H-18.-07	18.02	1.0666	0.2049	0.1462	5.2055	0.1921	1.0995
H-18.-08	18.01	1.0533	0.2130	0.1215	4.9455	0.2022	1.0932
H-18.-09	18.01	1.0128	0.2137	0.1110	4.7388	0.2110	1.0936
H-18.-10	18.01	0.9616	0.2117	0.1027	4.5416	0.2102	1.0914
H-18.-11	18.01	0.9032	0.2071	0.0935	4.3612	0.2193	1.0903
H-18.-12	18.01	0.8443	0.2009	0.0946	4.2032	0.2379	1.0881
H-18.-13	18.01	0.7724	0.1894	0.0906	4.0776	0.2152	1.0862
H-18.-14	18.01	0.7136	0.1792	0.0884	3.9830	0.2111	1.0866
H-18.-15	18.01	0.6587	0.1691	0.0847	3.8953	0.2167	1.0851
H-18.-16	18.01	0.5957	0.1566	0.0820	3.8039	0.2129	1.0855
H-18.-17	18.01	0.5520	0.1462	0.0800	3.7745	0.2149	1.0847
H-18.-18	18.01	0.4698	0.1268	0.0736	3.7061	0.2198	1.0832
H-18.-19	18.01	0.4129	0.1118	0.0693	3.6936	0.2707	1.0829
H-18.-20	18.01	0.3821	0.1039	0.0671	3.6758	0.2720	1.0832
H-18.-21	18.00	0.7396	0.1802	0.0923	4.1048	0.2136	0.9524
H-18.-22	18.01	0.8280	0.1974	0.0967	4.1950	0.2384	0.9358
H-18.-23	18.02	0.9333	0.1630	0.1984	5.7249	0.1787	0.9376

LEGEND

ALPHA GEOMETRIC ANGLE OF ATTACK CORRECTED FOR SHAFT TWIST

CL LIFT COEFFICIENT, NONDIMENSIONALIZED ON UPSTREAM VELOCITY AND MODEL PLANFORM AREA

CDUNC CD(UNCORRECTED), THE UNCORRECTED DRAG COEFFICIENT AS COMPUTED FROM MEASURED DRAG, AND NONDIMENSIONALIZED ON UPSTREAM VELOCITY AND MODEL PLANFORM AREA

CH MOMENT COEFFICIENT, NONDIMENSIONALIZED ON UPSTREAM VELOCITY, MODEL PLANFORM AREA, AND MEAN CHORD

L/D LIFT-TO-DRAG RATIO = CL/CDUNC

D/L DRAG-TO-LIFT RATIO = CDUNC/CL

RE REYNOLDS NUMBER, BASED ON MEAN CHORD



EXPERIMENTS OF WALL EFFECTS ON SUPERCavitating HYDROFOILS OF FINITE SPAN

\*\*PRIOR DATA CORRECTED FOR EFFECTS OF IMAGES OF TRAILING VORTEX SYSTEM\*\*

RUN NO	ALPHAT	CL	CD	CM	(D/L)	SIGV/AT	SIGC/AT	CL/AT	CD/AT2	CM/AT	SIGV	SIGC	CAVLTH	COMMENTS/REMARKS
B-18-01	14.57	0.942	0.174	0.197	0.184	-----	-----	3.701	2.682	0.776	-----	-----	-----	PV
B-18-02	14.58	0.942	0.174	0.199	0.185	-----	-----	3.702	2.694	0.780	-----	-----	-----	PV
B-18-03	14.58	0.938	0.174	0.199	0.186	-----	-----	3.684	2.691	0.782	-----	-----	-----	PV
B-18-04	14.59	0.956	0.174	0.203	0.182	-----	-----	3.754	2.686	0.797	-----	-----	-----	PC(TW)
B-18-05	14.61	0.977	0.176	0.201	0.180	-----	-----	3.834	2.704	0.788	-----	-----	-----	PC(TW)
B-18-06	14.62	1.008	0.189	0.186	0.187	-----	-----	3.938	2.896	0.731	-----	-----	-----	PC(TW)
B-18-07	14.65	1.067	0.217	0.146	0.203	4.020	2.522	4.171	3.314	0.572	1.028	0.645	0.65	
B-18-08	14.64	1.053	0.225	0.122	0.213	3.693	2.911	4.122	3.438	0.476	0.944	0.744	0.62	
B-18-09	14.62	1.013	0.224	0.111	0.222	3.484	2.854	3.970	3.448	0.435	0.889	0.728	0.63	
B-18-10	14.58	0.962	0.221	0.103	0.230	3.277	2.767	3.778	3.416	0.403	0.834	0.704	0.64	
B-18-11	14.55	0.903	0.216	0.099	0.239	3.047	2.614	3.557	3.343	0.388	0.774	0.664	0.68	
B-18-12	14.51	0.844	0.208	0.095	0.247	2.850	2.448	3.333	3.246	0.373	0.722	0.620	0.70	
B-18-13	14.47	0.772	0.196	0.091	0.253	2.590	2.296	3.058	3.067	0.359	0.654	0.580	0.90	
B-18-14	14.44	0.714	0.184	0.088	0.258	2.391	2.132	2.832	2.906	0.351	0.602	0.537	0.88	
B-18-15	14.40	0.659	0.174	0.085	0.264	2.184	1.973	2.620	2.748	0.337	0.549	0.496	0.90	
B-18-16	14.36	0.596	0.160	0.082	0.269	1.938	1.792	2.376	2.550	0.327	0.486	0.449	1.15	
B-18-17	14.34	0.552	0.149	0.080	0.271	1.739	1.674	2.206	2.386	0.320	0.435	0.419	1.30	
B-18-18	14.29	0.470	0.129	0.074	0.275	1.372	1.342	1.884	2.075	0.295	0.342	0.335	1.75	
B-18-19	14.25	0.413	0.114	0.069	0.275	1.092	1.066	1.660	1.835	0.278	0.272	0.265	2.65	
B-18-20	14.24	0.382	0.105	0.067	0.276	0.947	0.926	1.538	1.709	0.270	0.235	0.230	3.50	
B-18-21	14.44	0.740	0.186	0.092	0.251	2.605	2.303	2.934	2.924	0.366	0.657	0.581	0.75	
B-18-22	14.50	0.828	0.204	0.097	0.247	2.796	2.450	3.271	3.192	0.382	0.708	0.620	0.75	
B-18-23	14.57	0.933	0.172	0.198	0.184	-----	-----	3.670	2.660	0.780	-----	-----	-----	PV

UNLESS OTHERWISE INDICATED, ALL DATA ARE FOR:

1. SUPERCavitating FLOW.
2. BOTH STATIC PRESSURE TAPS OPEN.

LEGEND

- \* ONLY UPSTREAM STATIC PRESSURE TAP UTILIZED
- \* ONLY DNSTREAM STATIC PRESSURE TAP UTILIZED

PC PARTIALLY CAVITATING

PC(TW) PARTIALLY CAVITATING (TAP WETTED)

PV FULLY WETTED

AT (ALPHAT) (TRUE) ANGLE OF ATTACK, CORRECTED FOR EFFECTS OF IMAGES OF TRAILING VORTICES

AT2 ALPHAT\*\*2

SIGC CAVITATION NUMBER COMPUTED WITH MEASURED CAVITY PRESSURE

SIGV CAVITATION NUMBER COMPUTED WITH CALCULATED VAPOR PRESSURE

CD DRAG COEFFICIENT, CORRECTED FOR EFFECTS OF IMAGES OF TRAILING VORTICES

(D/L) CORRECTED DRAG-TO-LIFT RATIO = CD/CL

CAVLTH CAVITY LENGTH MEASURED FROM MIDCHORD AT CENTROID POSITION, NONDIMENSIONALIZED ON MEAN CHORD (OBTAINED FROM PHOTOGRAPHS)



EXPER INVES OF WALL EFFECTS ON SUPERCavitating HYDROFOILS OF FINITE SPAN

HYDROFOIL INPUT DATA

IR TT AREA SPAN MAC  
75 92 40.0 10.0 4.02

ZERO READINGS AND TUNNEL TEMP BEFORE AND AFTER

MANOM 1-N 1-R 2-N 2-R 3-N 3-R TT

0. 0.0 0.0 0.0 100.0 0.0 100.0 89.5  
0. 0.0 0.0 0.0 101.0 0.0 100.0 95.0

CELL LBS/CT(NORMAL/REV) #1=0.20000 #2=0.20000 #3=0.04030

TWIST= 7200.0 SHAFT DIA.= 1.50IN

\*\*INPUT DATA AS RECORDED\*\*

RUN NO	MANOM	S	#1	S	#2	S	#3	PINP	PCAV
M-16.-01	1450.	-1106.0	R	128.2	R	1536.0	R	89.	89.
M-16.-02	1451.	-1042.0	R	126.5	R	1514.0	R	293.	79.
M-16.-03	1448.	-994.0	R	125.5	R	1486.0	R	279.	73.
M-16.-04	1432.	-928.0	R	124.7	R	1436.0	R	261.	67.
M-16.-05	1422.	-876.0	R	124.0	R	1386.0	R	247.	61.
M-16.-06	1413.	-814.0	R	123.5	R	1318.0	R	231.	57.
M-16.-07	1408.	-756.0	R	122.9	R	1257.0	R	218.	54.
M-16.-08	1391.	-706.0	R	122.0	R	1192.0	R	203.	46.
M-16.-09	1385.	-678.0	R	122.0	R	1159.0	R	195.	49.
M-16.-10	1379.	-612.0	R	121.0	R	1074.0	R	179.	45.
M-16.-11	1373.	-552.0	R	120.0	R	983.0	R	161.	42.
M-16.-12	1371.	-522.0	R	119.0	R	941.0	R	152.	41.
M-16.-13	1369.	-484.0	R	118.5	R	891.0	R	141.	40.
M-16.-14	1369.	-450.0	R	118.0	R	837.0	R	129.	41.
M-16.-15	1367.	-410.0	R	117.0	R	775.0	R	111.	42.
M-16.-16	1396.	-672.0	R	121.3	R	1156.0	R	194.	42.
M-16.-17	1395.	-830.0	R	122.8	R	1329.0	R	237.	63.
M-16.-18+	1396.	-810.0	R	122.9	R	1308.0	R	238.	62.
M-16.-19*	1391.	-850.0	R	123.4	R	1353.0	R	238.	62.
M-16.-20	619.	-222.0	R	109.3	R	470.0	R	93.	44.
M-16.-21	279.	-178.0	R	106.0	R	354.0	R	94.	44.
M-16.-22	550.	-380.0	R	111.0	R	635.0	R	137.	55.
M-16.-23	723.	-488.0	R	113.9	R	795.0	R	159.	57.
M-16.-24	966.	-630.0	R	117.5	R	1007.0	R	190.	61.
M-16.-25	1181.	-752.0	R	121.0	R	1193.0	R	218.	63.
M-16.-26	1433.	-912.0	R	125.0	R	1422.0	R	253.	65.
M-16.-27	1429.	-1058.0	R	125.2	R	1224.0	R	642.	---
M-16.-28	722.	-560.0	R	127.8	R	698.0	R	726.	---

IR ROOM TEMPER (DEG FAHR)

TT TUNNEL " ( " " )

AREA HALF-SPAN MODEL PLANFORM AREA (SQ IN)

SPAN FOIL HALF-SPAN (IN)

MAC MEAN CHORD, MEAS. @ MODEL CENTROID (IN)

MANOM VELOCITY MANOMETER READING (MM)

TWIST SHAFT TWIST (DEGREES/IN-LB)

S LOAD CELL POLARITY (N=NORMAL, R=REVERSE)

LOAD CELL #1 LIPT (COUNTS)

#2 MOMENT ABOUT MIDCHORD (COUNTS)

#3 DRAG (COUNTS)

PINP STATIC PRESSURE (MM HG)

PCAV CAVITY PRESSURE (MM HG)

RUN NO Q-XXX-YY: Q=FOIL TESTED (S=SMALL, M=MED, L=LARGE)

IXX=GEOMETRIC ATTACK ANGLE (DEGREES)

YY=RUN NUMBER, THIS FOIL @ THIS ANGLE

PW

PW





EXPER INVPS OF WALL EFFECTS ON SUPERCavitating HYDROFOILS OF FINITE SPAN

INPUT DATA CORRECTED FOR ZERO READINGS, SIGNS, AND HYDROSTATIC PRESSURE

RUN NO	MANOM	#1	#2	#3	PINF	PCAV
M-16.-01	1450.	-1106.0	-28.2	-1436.0	298.	89.
M-16.-02	1451.	-1042.0	-26.5	-1414.0	282.	79.
M-16.-03	1448.	-994.0	-25.4	-1386.0	260.	73.
M-16.-04	1432.	-928.0	-24.6	-1336.0	250.	67.
M-16.-05	1422.	-876.0	-23.9	-1286.0	236.	61.
M-16.-06	1413.	-814.0	-23.3	-1218.0	220.	57.
M-16.-07	1408.	-756.0	-22.7	-1157.0	207.	54.
M-16.-08	1391.	-706.0	-21.7	-1092.0	192.	46.
M-16.-09	1385.	-678.0	-21.7	-1059.0	184.	49.
M-16.-10	1379.	-612.0	-20.7	-974.0	168.	45.
M-16.-11	1373.	-552.0	-19.6	-883.0	150.	42.
M-16.-12	1371.	-522.0	-18.6	-841.0	141.	41.
M-16.-13	1369.	-484.0	-18.1	-791.0	130.	40.
M-16.-14	1369.	-450.0	-17.5	-737.0	118.	41.
M-16.-15	1367.	-410.0	-16.5	-675.0	100.	42.
M-16.-16	1396.	-672.0	-20.7	-1056.0	183.	42.
M-16.-17	1395.	-830.0	-22.2	-1229.0	226.	63.
M-16.-18	1396.	-810.0	-22.3	-1208.0	227.	62.
M-16.-19	1391.	-850.0	-22.7	-1253.0	227.	62.
M-16.-20	619.	-222.0	-8.6	-370.0	82.	44.
M-16.-21	279.	-178.0	-5.3	-254.0	83.	44.
M-16.-22	550.	-380.0	-10.2	-535.0	126.	55.
M-16.-23	723.	-488.0	-13.1	-695.0	148.	57.
M-16.-24	966.	-630.0	-16.6	-907.0	179.	61.
M-16.-25	1181.	-752.0	-20.1	-1093.0	207.	63.
M-16.-26	1433.	-912.0	-24.1	-1322.0	242.	65.
M-16.-27	1429.	-1058.0	-24.2	-1124.0	631.	----
M-16.-28	722.	-560.0	-26.8	-598.0	715.	----



\*\*HYDROFOIL DATA REDUCTION\*\*

RUN NO	ALPHA	LIFT-LB	DRAQ-LB	NON-INLB	VEL-FPS
M-16.-01	16.01	226.84	57.87	101.52	28.17
M-16.-02	16.01	213.69	56.98	95.27	28.18
M-16.-03	16.01	203.89	55.86	91.53	28.15
M-16.-04	16.01	190.52	53.84	88.52	28.00
M-16.-05	16.01	179.97	51.83	85.87	27.91
M-16.-06	16.01	167.46	49.09	83.93	27.83
M-16.-07	16.01	155.74	46.63	81.64	27.79
M-16.-08	16.01	145.55	44.01	78.27	27.63
M-16.-09	16.01	139.94	42.68	78.13	27.57
M-16.-10	16.01	126.53	39.25	74.40	27.52
M-16.-11	16.01	114.33	35.58	70.67	27.46
M-16.-12	16.01	108.12	33.89	66.93	27.44
M-16.-13	16.01	100.41	31.88	65.00	27.42
M-16.-14	16.01	93.50	29.70	63.07	27.42
M-16.-15	16.01	85.30	27.20	59.33	27.41
M-16.-16	16.01	138.55	42.56	74.68	27.67
M-16.-17	16.01	170.44	49.53	79.95	27.67
M-16.-18	16.01	166.45	48.68	80.17	27.67
M-16.-19	16.01	174.55	50.50	81.84	27.63
M-16.-20	16.00	46.12	14.91	30.95	18.96
M-16.-21	16.00	36.65	10.24	18.93	13.08
M-16.-22	16.01	78.04	21.56	36.80	17.94
M-16.-23	16.01	100.22	28.01	47.11	20.38
M-16.-24	16.01	129.33	36.55	59.93	23.32
M-16.-25	16.01	154.42	44.05	72.40	25.60
M-16.-26	16.01	187.21	53.28	86.67	28.01
M-16.-27	16.01	216.45	45.30	87.25	27.98
M-16.-28	16.01	117.36	24.10	96.48	20.36

LEGEND VEL UPSTREAM VELOCITY (U)



\*\*HYDROFOIL DATA IN NONDIMENSIONAL FORM (NO CORRECTIONS APPLIED)\*\*

RUN NO	ALPHA	CL	CDUNC	CH	L/D	D/L	RM*10**-6
H-16.-01	16.01	1.0657	0.2664	0.1186	3.9997	0.2500	1.1378
H-16.-02	16.01	1.0033	0.2621	0.1113	3.8277	0.2613	1.1382
H-16.-03	16.01	0.9591	0.2573	0.1071	3.7273	0.2683	1.1371
H-16.-04	16.01	0.9055	0.2505	0.1047	3.6153	0.2766	1.1312
H-16.-05	16.01	0.8610	0.2425	0.1022	3.5505	0.2817	1.1275
H-16.-06	16.01	0.8059	0.2308	0.1005	3.4921	0.2864	1.1242
H-16.-07	16.01	0.7519	0.2197	0.0981	3.4228	0.2922	1.1224
H-16.-08	16.01	0.7107	0.2094	0.0951	3.3934	0.2947	1.1160
H-16.-09	16.01	0.6861	0.2038	0.0953	3.3667	0.2970	1.1138
H-16.-10	16.01	0.6229	0.1878	0.0911	3.3172	0.3015	1.1116
H-16.-11	16.01	0.5651	0.1704	0.0869	3.3155	0.3016	1.1093
H-16.-12	16.01	0.5351	0.1623	0.0824	3.2972	0.3033	1.1086
H-16.-13	16.01	0.4976	0.1525	0.0801	3.2625	0.3065	1.1078
H-16.-14	16.01	0.4634	0.1417	0.0778	3.2693	0.3059	1.1078
H-16.-15	16.01	0.4233	0.1295	0.0732	3.2676	0.3060	1.1070
H-16.-16	16.01	0.6743	0.2017	0.0904	3.3435	0.2991	1.1179
H-16.-17	16.01	0.8301	0.2358	0.0969	3.5208	0.2840	1.1175
H-16.-18	16.01	0.8101	0.2315	0.0971	3.4996	0.2857	1.1179
H-16.-19	16.01	0.8523	0.2411	0.0994	3.5347	0.2829	1.1160
H-16.-20	16.00	0.4784	0.1489	0.0799	3.2123	0.3113	0.7657
H-16.-21	16.00	0.7981	0.2168	0.1025	3.6807	0.2717	0.5285
H-16.-22	16.01	0.9036	0.2438	0.1060	3.7058	0.2698	0.7248
H-16.-23	16.01	0.8997	0.2457	0.1052	3.6609	0.2732	0.8231
H-16.-24	16.01	0.8866	0.2450	0.1022	3.6188	0.2763	0.9419
H-16.-25	16.01	0.8781	0.2450	0.1024	3.5846	0.2790	1.0342
H-16.-26	16.01	0.8892	0.2476	0.1024	3.5912	0.2785	1.1316
H-16.-27	16.01	1.0307	0.2103	0.1034	4.9019	0.2040	1.1301
H-16.-28	16.01	1.0549	0.2109	0.2157	5.0012	0.2000	0.8226

## LEGEND

ALPHA GEOMETRIC ANGLE OF ATTACK CORRECTED FOR SHAFT TWIST

CL LIFT COEFFICIENT, NONDIMENSIONALIZED ON UPSTREAM VELOCITY AND MODEL PLANFORM AREA  
CDUNC CD (UNCORRECTED), THE UNCORRECTED DRAG COEFFICIENT AS COMPUTED FROM MEASURED DRAG, AND NONDIMENSIONALIZED ON UPSTREAM VELOCITY AND MODEL PLANFORM AREA

CH MOMENT COEFFICIENT, NONDIMENSIONALIZED ON UPSTREAM VELOCITY, MODEL PLANFORM AREA, AND MEAN CHORD

L/D LIFT-TO-DRAG RATIO = CL/CDUNC

D/L DRAG-TO-LIFT RATIO = CDUNC/CL

RE REYNOLDS NUMBER, BASED ON MEAN CHORD



## \*\*PRIOR DATA CORRECTED FOR EFFECTS OF IMAGES OF TRAILING VORTEX SYSTEM\*\*

RUN NO	ALPHAT	CL	CD	CM	(D/L)	SIGV/AT	SIGC/AT	CL/AT	CD/AT2	CM/AT	SIGV	SIGC	CAVLTH	COMMENTS/REMARKS
M-16.-01	16.65	1.066	0.278	0.119	0.261	3.286	2.618	3.667	3.295	0.408	0.955	0.761	0.69	
M-16.-02	16.61	1.003	0.273	0.111	0.272	3.088	2.547	3.461	3.243	0.384	0.895	0.738	0.72	
M-16.-03	16.58	0.959	0.267	0.107	0.278	2.920	2.455	3.313	3.185	0.370	0.845	0.711	0.77	
M-16.-04	16.55	0.905	0.259	0.105	0.286	2.725	2.333	3.134	3.103	0.362	0.787	0.674	0.82	
M-16.-05	16.52	0.861	0.250	0.102	0.291	2.564	2.249	2.985	3.008	0.354	0.740	0.649	0.98	
M-16.-06	16.49	0.806	0.238	0.100	0.295	2.375	2.112	2.800	2.867	0.349	0.684	0.608	0.96	
M-16.-07	16.46	0.752	0.226	0.098	0.302	2.215	1.993	2.617	2.733	0.341	0.636	0.573	1.00	
M-16.-08	16.43	0.711	0.215	0.095	0.307	2.043	1.927	2.478	2.610	0.331	0.586	0.553	1.10	
M-16.-09	16.42	0.686	0.209	0.095	0.304	1.944	1.791	2.394	2.541	0.333	0.557	0.513	1.15	
M-16.-10	16.38	0.623	0.192	0.091	0.308	1.740	1.642	2.179	2.346	0.319	0.498	0.469	1.17	
M-16.-11	16.35	0.565	0.174	0.087	0.307	1.507	1.451	1.981	2.135	0.305	0.430	0.414	1.62	
M-16.-12	16.33	0.535	0.165	0.082	0.309	1.386	1.347	1.878	2.035	0.289	0.395	0.384	1.89	
M-16.-13	16.31	0.498	0.155	0.080	0.312	1.239	1.216	1.749	1.915	0.282	0.352	0.346	2.17	
M-16.-14	16.28	0.463	0.144	0.078	0.311	1.075	1.043	1.630	1.782	0.274	0.306	0.296	2.75	
M-16.-15	16.26	0.423	0.131	0.073	0.310	0.831	0.789	1.492	1.632	0.258	0.236	0.224	4.35	
M-16.-16	16.41	0.674	0.206	0.090	0.306	1.895	1.857	2.354	2.515	0.316	0.543	0.532	1.10	
M-16.-17	16.51	0.830	0.243	0.097	0.293	2.445	2.135	2.881	2.927	0.336	0.704	0.615	---	
M-16.-18*	16.49	0.810	0.238	0.097	0.294	2.455	2.162	2.814	2.876	0.337	0.707	0.622	---	
M-16.-19*	16.52	0.852	0.249	0.099	0.292	2.456	2.166	2.956	2.992	0.345	0.708	0.624	---	
M-16.-20	16.29	0.478	0.151	0.080	0.316	1.191	1.081	1.683	1.872	0.281	0.339	0.307	---	
M-16.-21	16.48	0.798	0.223	0.103	0.280	2.515	2.301	2.775	2.701	0.357	0.723	0.662	---	
M-16.-22	16.54	0.904	0.252	0.106	0.279	2.658	2.212	3.130	3.027	0.367	0.768	0.639	---	
M-16.-23	16.54	0.900	0.254	0.105	0.283	2.584	2.196	3.116	3.049	0.364	0.746	0.634	---	
M-16.-24	16.54	0.897	0.253	0.102	0.286	2.539	2.174	3.072	3.039	0.354	0.733	0.627	---	
M-16.-25	16.53	0.878	0.253	0.102	0.288	2.529	2.200	3.043	3.038	0.355	0.730	0.635	---	
M-16.-26	16.54	0.889	0.256	0.102	0.288	2.554	2.256	3.080	3.069	0.355	0.737	0.651	---	
M-16.-27	16.63	1.031	0.221	0.103	0.215	---	---	3.552	2.628	0.356	---	---	PH	
M-16.-28	16.64	1.055	0.223	0.216	0.211	---	---	3.632	2.637	0.743	---	---	PH	

UNLESS OTHERWISE INDICATED, ALL DATA ARE FOR:

1. SUPERCavitating FLOW.
2. BOTH STATIC PRESSURE TAPS OPEN.

## LEGEND

\* ONLY UPSTREAM STATIC PRESSURE TAP UTILIZED

\* ONLY DNSTREAM STATIC PRESSURE TAP UTILIZED

PC PARTIALLY CAVITATING

PC(TW) PARTIALLY CAVITATING (TAP WETTED)

PW FULLY WETTED

AT (ALPHAT) (TRUE) ANGLE OF ATTACK, CORRECTED FOR EFFECTS OF IMAGES OF TRAILING VORTICES

AT2 ALPHAT\*\*2

SIGC CAVITATION NUMBER COMPUTED WITH MEASURED CAVITY PRESSURE

SIGV CAVITATION NUMBER COMPUTED WITH CALCULATED VAPOR PRESSURE

CD DRAG COEFFICIENT, CORRECTED FOR EFFECTS OF IMAGES OF TRAILING VORTICES

(D/L) CORRECTED DRAG-TO-LIFT RATIO = CD/CL

CAVLTH CAVITY LENGTH MEASURED FROM MIDCHORD AT CENTROID POSITION, NONDIMENSIONALIZED ON MEAN CHORD  
(OBTAINED FROM PHOTOGRAPHS)





EXPER INVES OF WALL EFFECTS ON SUPERCavitating HYDROFOILS OF FINITE SPAN

HYDROFOIL INPUT DATA

TR TT AREA SPAN HAC  
78 94 40.0 10.0 4.02

ZERO READINGS AND TUNNEL TEMP BEFORE AND AFTER

MANOM 1-M 1-R 2-R 3-R TT  
0. 0.0 0.0 0.0 100.0 0.0 100.0 92.0  
0. 0.0 0.0 0.0 100.6 0.0 103.0 95.0  
CELL LES/CI(NORMAL/REV) #1=0.20000 #2=0.20000 #3=0.04030  
TWIST= 7200.0 SHAFT DIA.= 1.50IN

\*\*INPUT DATA AS RECORDED\*\*

RUN NO	MANOM	S	#1	S	#2	S	#3	PINP	PCAV
M-18.-01	1521.	-1230.0	R	135.5	R	1820.0	383.	170.	
M-18.-02	1522.	-1212.0	R	133.7	R	1818.0	368.	153.	
M-18.-03	1512.	-1186.0	R	131.5	R	1818.0	352.	133.	
M-18.-04	1509.	-1140.0	R	129.0	R	1809.0	331.	118.	
M-18.-05	1499.	-1106.0	R	128.0	R	1790.0	315.	101.	
M-18.-06	1491.	-1060.0	R	126.8	R	1770.0	295.	82.	
M-18.-07	1484.	-1004.0	R	126.0	R	1715.0	276.	74.	
M-18.-08	1478.	-930.0	R	125.2	R	1644.0	254.	65.	
M-18.-09	1468.	-862.0	R	124.2	R	1569.0	234.	61.	
M-18.-10	1459.	-790.0	R	123.4	R	1473.0	216.	56.	
M-18.-11	1462.	-730.0	R	122.6	R	1392.0	198.	47.	
M-18.-12	1456.	-666.0	R	122.0	R	1290.0	180.	47.	
M-18.-13	1449.	-618.0	R	121.2	R	1206.0	164.	44.	
M-18.-14	1448.	-568.0	R	120.6	R	1118.0	148.	43.	
M-18.-15	1439.	-520.0	R	120.0	R	1042.0	131.	43.	
M-18.-16	1439.	-492.0	R	119.5	R	1002.0	121.	43.	
M-18.-17	1437.	-476.0	R	119.0	R	969.0	113.	43.	
M-18.-18	1137.	-394.0	R	115.5	R	812.0	113.	43.	
M-18.-19+	1127.	-366.0	R	115.1	R	788.0	113.	43.	
M-18.-20*	1154.	-402.0	R	116.0	R	836.0	113.	43.	

LOAD CELL #1 LIPT (COUNTS) #2 MOMENT ABOUT MIDCHORD (COUNTS)  
#3 DRAG (COUNTS)  
PINP STATIC PRESSURE (MM HG)  
PCAV CAVITY PRESSURE (MM HG)  
RUN NO Q-XXX-YY: Q=FOIL TESTED(S=SMALL,M=MED,L=LARGE)  
XXI=GEOMETRIC ATTACK ANGLE (DEGREES)  
YY=RUN NUMBER, THIS FOIL @ THIS ANGLE

TR ROOM TEMPER (DEG FAHR)

TT TUNNEL " ( " )  
AREA HALF-SPAN MODEL PLANFORM AREA (SQ IN)  
SPAN FOIL HALF-SPAN (IN)  
MAC MEAN CHORD, MEAS. @ MODEL CENTROID(IN)  
MANOM VELOCITY MANOMETER READING (MM)  
TWIST SHAFT TWIST (DEGREES/IN-18)  
S LOAD CELL POLARITY(N=NORMAL,R=REVERSE)



## INPUT DATA CORRECTED FOR ZERO READINGS, SIGNS, AND HYDROSTATIC PRESSURE

RUN NO	BAROM	#1	#2	#3	PINP	PCAV
B-18.-01	1521.	-1230.0	-35.5	-1720.0	372.	170.
B-18.-02	1522.	-1212.0	-33.7	-1717.8	357.	153.
B-18.-03	1512.	-1186.0	-31.4	-1717.7	341.	133.
B-18.-04	1509.	-1140.0	-28.9	-1708.5	320.	114.
B-18.-05	1499.	-1106.0	-27.9	-1689.4	304.	101.
B-18.-06	1491.	-1060.0	-26.6	-1669.2	284.	82.
B-18.-07	1484.	-1004.0	-25.8	-1614.1	265.	74.
B-18.-08	1478.	-930.0	-25.0	-1542.9	243.	65.
B-18.-09	1468.	-862.0	-23.9	-1467.7	223.	61.
B-18.-10	1459.	-790.0	-23.1	-1371.6	205.	56.
B-18.-11	1462.	-730.0	-22.3	-1290.4	187.	47.
B-18.-12	1456.	-666.0	-21.7	-1188.3	169.	47.
B-18.-13	1449.	-618.0	-20.8	-1104.1	153.	44.
B-18.-14	1448.	-568.0	-20.2	-1015.9	137.	43.
B-18.-15	1439.	-520.0	-19.6	-939.8	120.	43.
B-18.-16	1439.	-492.0	-19.0	-899.6	110.	43.
B-18.-17	1437.	-476.0	-18.5	-866.5	102.	43.
B-18.-18	1137.	-394.0	-15.0	-709.3	102.	43.
B-18.-19	1127.	-366.0	-14.5	-685.2	102.	43.
B-18.-20	1154.	-402.0	-15.4	-733.0	102.	43.



EXPERIMENTS OF WALL EFFECTS ON SUPERCavitating HYDROFOILS OF FINITE SPAN

\*\*HYDROFOIL DATA REDUCTION\*\*

RUN NO	ALPHA	LIFT-LB	DRAG-LB	MON-INLB	VEL-FPS
M-18-01	18.02	253.10	69.32	127.80	28.78
M-18-02	18.02	249.13	69.23	121.21	28.79
M-18-03	18.02	243.49	69.22	113.17	28.71
M-18-04	18.01	233.78	68.85	104.06	28.68
M-18-05	18.01	226.77	68.08	100.35	28.59
M-18-06	18.01	217.33	67.27	95.91	28.52
M-18-07	18.01	205.96	65.05	92.92	28.46
M-18-08	18.01	191.00	62.18	89.92	28.40
M-18-09	18.01	177.19	59.15	86.21	28.31
M-18-10	18.01	162.62	55.27	83.22	28.23
M-18-11	18.01	150.46	52.00	80.22	28.26
M-18-12	18.01	137.53	47.89	77.95	28.21
M-18-13	18.01	127.76	44.50	74.96	28.14
M-18-14	18.01	117.64	40.94	72.68	28.13
M-18-15	18.01	107.91	37.87	70.41	28.05
M-18-16	18.01	102.21	36.26	68.49	28.05
M-18-17	18.01	98.90	34.92	66.58	28.03
M-18-18	18.01	81.79	28.59	53.87	25.14
M-18-19	18.01	76.11	27.61	52.31	25.04
M-18-20	18.01	83.48	29.54	55.44	25.31

LEGEND VEL UPSTREAM VELOCITY (U)



EXPER INVES OF HALL EFFECTS ON SUPERCavitating HYDROFOILS OF FINITE SPAN

\*\*HYDROFOIL DATA IN NONDIMENSIONAL FORM (NO CORRECTIONS APPLIED)\*\*

RUN NO	ALPHA	CL	CDUNC	CM	L/D	D/L	RM*10**6
M-18.-01	18.02	1.1390	0.3065	0.1431	3.7158	0.2691	1.1811
M-18.-02	18.02	1.1204	0.3059	0.1356	3.6622	0.2731	1.1814
M-18.-03	18.02	1.1018	0.3078	0.1274	3.5792	0.2794	1.1778
M-18.-04	18.01	1.0598	0.3067	0.1173	3.4552	0.2894	1.1767
M-18.-05	18.01	1.0344	0.3051	0.1139	3.3900	0.2950	1.1731
M-18.-06	18.01	0.9963	0.3030	0.1094	3.2884	0.3041	1.1702
M-18.-07	18.01	0.9483	0.2981	0.1064	3.2247	0.3101	1.1676
M-18.-08	18.01	0.8827	0.2820	0.1034	3.1307	0.3194	1.1654
M-18.-09	18.01	0.8241	0.2697	0.0997	3.0558	0.3273	1.1618
M-18.-10	18.01	0.7607	0.2531	0.0968	3.0051	0.3328	1.1584
M-18.-11	18.01	0.7024	0.2374	0.0932	2.9592	0.3379	1.1595
M-18.-12	18.01	0.6446	0.2190	0.0909	2.9430	0.3398	1.1573
M-18.-13	18.01	0.6015	0.2041	0.0878	2.9477	0.3393	1.1547
M-18.-14	18.01	0.5542	0.1875	0.0852	2.9563	0.3383	1.1544
M-18.-15	18.01	0.5113	0.1740	0.0830	2.9380	0.3404	1.1510
M-18.-16	18.01	0.4843	0.1664	0.0807	2.9109	0.3435	1.1510
M-18.-17	18.01	0.4692	0.1602	0.0786	2.9281	0.3415	1.1503
M-18.-18	18.01	0.4425	0.1611	0.0791	2.9580	0.3381	1.0315
M-18.-19	18.01	0.4527	0.1587	0.0774	2.8520	0.3506	1.0273
M-18.-20	18.01	0.4857	0.1664	0.0802	2.9195	0.3425	1.0387

LEGEND

ALPHA GEOMETRIC ANGLE OF ATTACK CORRECTED FOR SHAFT TWIST

CL LIFT COEFFICIENT, NONDIMENSIONALIZED ON UPSTREAM VELOCITY AND MODEL PLANFORM AREA

CDUNC CD(UNCORRECTED), THE UNCORRECTED DRAG COEFFICIENT AS COMPUTED FROM MEASURED DRAG, AND NONDIMENSIONALIZED

ON UPSTREAM VELOCITY AND MODEL PLANFORM AREA

CM MOMENT COEFFICIENT, NONDIMENSIONALIZED ON UPSTREAM VELOCITY, MODEL PLANFORM AREA, AND MEAN CHORD

L/D LIFT-TO-DRAG RATIO = CL/CDUNC

D/L DRAG-TO-LIFT RATIO = CDUNC/CL

RM REYNOLDS NUMBER, BASED ON MEAN CHORD





## \*\*PRIOR DATA CORRECTED FOR EFFECTS OF IMAGES OF TRAILING VORTEX SYSTEM\*\*

EXP NO	ALPHAT	CL	CD	CM	(D/L)	SIGV/AT	SIGC/AT	CL/AT	CD/AT2	CM/AT	SIGV	SIGC	CAVLTH	COMMENTS/REMARKS
H-18.-01	18.70	1.139	0.320	0.183	0.281	3.562	2.158	3.490	3.005	0.438	1.162	0.704	0.72	
H-18.-02	18.68	1.120	0.319	0.136	0.285	3.400	2.179	3.436	3.000	0.416	1.109	0.711	0.76	
H-18.-03	18.67	1.102	0.320	0.127	0.291	3.289	2.237	3.381	3.017	0.391	1.059	0.729	0.75	
H-18.-04	18.65	1.060	0.318	0.117	0.300	3.031	2.223	3.257	3.007	0.361	0.987	0.723	0.71	
H-18.-05	18.63	1.034	0.316	0.114	0.306	2.877	2.206	3.181	2.991	0.350	0.935	0.717	0.75	
H-18.-06	18.61	0.996	0.313	0.109	0.314	2.674	2.209	3.068	2.971	0.337	0.869	0.717	0.70	
H-18.-07	18.58	0.948	0.303	0.106	0.320	2.480	2.101	2.925	2.886	0.328	0.808	0.681	0.80	
H-18.-08	18.54	0.883	0.290	0.103	0.329	2.249	1.970	2.728	2.771	0.320	0.728	0.637	0.88	
H-18.-09	18.50	0.824	0.277	0.100	0.336	2.043	1.808	2.552	2.654	0.309	0.660	0.584	0.89	
H-18.-10	18.46	0.761	0.259	0.097	0.341	1.854	1.676	2.360	2.495	0.300	0.598	0.540	1.01	
H-18.-11	18.43	0.702	0.243	0.093	0.345	1.650	1.575	2.184	2.344	0.290	0.531	0.507	1.15	
H-18.-12	18.39	0.645	0.223	0.091	0.346	1.454	1.381	2.008	2.167	0.283	0.467	0.443	1.60	
H-18.-13	18.37	0.601	0.208	0.088	0.346	1.278	1.242	1.876	2.022	0.274	0.410	0.398	1.65	
H-18.-14	18.34	0.554	0.191	0.085	0.344	1.097	1.073	1.731	1.861	0.266	0.351	0.344	2.12	
H-18.-15	18.31	0.511	0.177	0.083	0.346	0.908	0.886	1.600	1.730	0.260	0.290	0.283	3.28	
H-18.-16	18.30	0.484	0.169	0.081	0.349	0.791	0.772	1.516	1.655	0.253	0.253	0.247	3.50	
H-18.-17	18.29	0.469	0.163	0.079	0.346	0.698	0.682	1.470	1.595	0.246	0.223	0.218	4.60	
H-18.-18	18.29	0.483	0.166	0.079	0.343	0.865	0.847	1.511	1.624	0.248	0.276	0.271	----	
H-18.-19+	18.28	0.453	0.161	0.077	0.355	0.870	0.855	1.419	1.581	0.243	0.278	0.273	----	
H-18.-20*	18.30	0.486	0.169	0.060	0.348	0.848	0.836	1.521	1.655	0.251	0.271	0.267	----	

UNLESS OTHERWISE INDICATED, ALL DATA ARE FOR:

1. SUPERCAVITATING FLOW.
2. BOTH STATIC PRESSURE TAPS OPEN.

## LEGEND

\* ONLY UPSTREAM STATIC PRESSURE TAP UTILIZED

\* ONLY DNSTREAM STATIC PRESSURE TAP UTILIZED

PC PARTIALLY CAVITATING

PC(TW) PARTIALLY CAVITATING (TAP WETTED)

FW FULLY WETTED

AT (ALPHAT) (TRUE) ANGLE OF ATTACK, CORRECTED FOR EFFECTS OF IMAGES OF TRAILING VORTICES

AT2 ALPHAT\*2

SIGC CAVITATION NUMBER COMPUTED WITH MEASURED CAVITY PRESSURE

SIGV CAVITATION NUMBER COMPUTED WITH CALCULATED VAPOR PRESSURE

CD DRAG COEFFICIENT, CORRECTED FOR EFFECTS OF IMAGES OF TRAILING VORTICES

(D/L) CORRECTED DRAG-TO-LIFT RATIO = CD/CL

CAVLTH CAVITY LENGTH MEASURED FROM MIDCHORD AT CENTROID POSITION, NONDIMENSIONALIZED ON MEAN CHORD (OBTAINED FROM PHOTOGRAPHS)



ZIBER INVES OF WALL EFFECTS ON SUPERCavitating HYDROFOILS OF FINITE SPAN

HYDROFOIL INPUT DATA  
TR TT AREA SPAN MAC  
78 96 40.0 10.0 4.02

ZERO READINGS AND TUNNEL TEMP BEFORE AND AFTER

HANOH 1-R 1-R 2-R 3-M 3-R TT  
0. 0.0 0.0 0.0 100.0 0.0 100.0 98.5  
0. 0.0 0.0 0.0 100.5 0.0 110.0 97.0  
CELL LBS/CT (NORMAL/REV) #1=0.20000 #2=0.20000 #3=0.04030  
TWIST= 7200.0 SHAFT DIA.= 1.50IN

\*\*INPUT DATA AS RECORDED\*\*

RUN NO	MANOH	S	#1	S	#2	S	#3	PINF	PCAV
M-21.-01	1456.		-1102.0	R	129.5	R	2109.0	396.	177.
M-21.-02	1439.		-1076.0	R	127.8	R	2075.0	373.	154.
M-21.-03	1434.		-1042.0	R	126.6	R	2052.0	350.	133.
M-21.-04	1429.		-1020.0	R	125.8	R	2020.0	327.	115.
M-21.-05	1424.		-974.0	R	125.1	R	1980.0	308.	99.
M-21.-06*	1412.		-960.0	R	124.8	R	1965.0	305.	93.
M-21.-07*	1420.		-990.0	R	125.2	R	1995.0	306.	93.
M-21.-08	1422.		-920.0	R	124.2	R	1910.0	282.	85.
M-21.-09	1419.		-866.0	R	123.6	R	1850.0	258.	75.
M-21.-10	1420.		-824.0	R	123.3	R	1793.0	240.	65.
M-21.-11	1423.		-768.0	R	122.9	R	1712.0	222.	59.
M-21.-12	1420.		-718.0	R	122.5	R	1603.0	204.	54.
M-21.-13	1423.		-666.0	R	122.0	R	1502.0	184.	50.
M-21.-14	1423.		-634.0	R	121.9	R	1434.0	172.	47.
M-21.-15	1415.		-608.0	R	121.5	R	1378.0	163.	47.
M-21.-16	1411.		-576.0	R	121.0	R	1320.0	151.	47.
M-21.-17	1405.		-550.0	R	120.6	R	1268.0	143.	47.
M-21.-18	1401.		-540.0	R	120.5	R	1247.0	138.	47.

LOAD CHLL #1 LIPT (COUNTS) #2 MOMENT ABOUT MIDCHORD (COUNTS)  
#3 DRAG (COUNTS)  
PINF STATIC PRESSURE (MM HG)  
PCAV CAVITY PRESSURE (MM HG)  
RUN NO Q-XXX-YY: Q=FOIL TESTED (S=SMALL, M=MED, L=LARGE)  
XX=GEOMETRIC ATTACK ANGLE (DEGREES)  
YY=RUN NUMBER, THIS FOIL @ THIS ANGLE

TR ROOM TEMPER (DEG FAHR)

TT TUNNEL " ( " )

AREA HALF-SPAN MODEL PLANFORM AREA (SQ IN)

SPAN FOIL HALF-SPAN (IN)

MAC MEAN CHORD, MEAS. @ MODEL CENTROID (IN)

MANOH VELOCITY MANOMETER READING (MM)

TWIST SHAFT TWIST (DEGREES/IN-LB)

: LOAD CELL POLARITY (N=NORMAL, R=REVERSE)

LEGEND



EXPER INVES OF WALL EFFECTS OF SUPERCAVITATING HYDROFOILS OF FINITE SPAN

INPUT DATA CORRECTED FOR ZERO READINGS, SIGNS, AND HYDROSTATIC PRESSURE

RUN NO	HANON	#1	#2	#3	PIMP	PCAV
M-21.-01	1456.	-1102.0	-29.5	-2009.0	385.	177.
M-21.-02	1439.	-1076.0	-27.8	-1974.4	362.	154.
M-21.-03	1434.	-1042.0	-26.5	-1950.8	339.	133.
M-21.-04	1429.	-1020.0	-25.7	-1918.2	316.	115.
M-21.-05	1424.	-974.0	-25.0	-1877.6	297.	99.
M-21.-06	1412.	-960.0	-24.7	-1862.1	294.	93.
M-21.-07	1420.	-990.0	-25.0	-1891.5	295.	93.
M-21.-08	1422.	-920.0	-24.0	-1805.9	271.	85.
M-21.-09	1419.	-866.0	-23.4	-1745.3	247.	75.
M-21.-10	1420.	-824.0	-23.0	-1687.7	229.	65.
M-21.-11	1423.	-768.0	-22.6	-1606.1	211.	59.
M-21.-12	1420.	-718.0	-22.2	-1496.5	193.	54.
M-21.-13	1423.	-666.0	-21.6	-1394.9	173.	50.
M-21.-14	1423.	-634.0	-21.5	-1326.4	161.	47.
M-21.-15	1415.	-608.0	-21.1	-1269.8	152.	47.
M-21.-16	1411.	-576.0	-20.6	-1211.2	140.	47.
M-21.-17	1405.	-550.0	-20.1	-1158.6	132.	47.
M-21.-18	1401.	-540.0	-20.0	-1137.0	127.	47.



ZIPER INVES OF WALL EFFECTS ON SUPERCAVITATING HYDROFOILS OF FINITE SPAN

\*\*HYDROFOIL DATA REDUCTION\*\*

RUN NO	ALPHA	LIFT-LB	DRAG-LB	MON-IMLB	VEL-PPS
M-21.-01	21.01	226.30	80.96	106.20	28.21
M-21.-02	21.01	220.75	79.57	99.97	28.06
M-21.-03	21.01	213.71	78.62	95.55	28.01
M-21.-04	21.01	209.14	77.30	92.56	27.96
M-21.-05	21.01	199.80	75.67	89.94	27.92
M-21.-06	21.01	196.93	75.04	88.75	27.81
M-21.-07	21.01	203.00	76.23	90.08	27.88
M-21.-08	21.01	188.80	72.78	86.38	27.90
M-21.-09	21.01	177.87	70.34	84.11	27.87
M-21.-10	21.01	169.41	68.01	82.93	27.88
M-21.-11	21.01	158.12	64.73	81.38	27.91
M-21.-12	21.01	148.04	60.31	79.84	27.88
M-21.-13	21.01	137.53	56.22	77.93	27.91
M-21.-14	21.01	131.10	53.45	77.46	27.91
M-21.-15	21.01	125.82	51.17	75.92	27.84
M-21.-16	21.01	119.31	48.81	74.01	27.80
M-21.-17	21.01	114.03	46.69	72.47	27.75
M-21.-18	21.01	112.00	45.82	72.00	27.71

LEGEND VEL UPSTREAM VELOCITY (U)





EXPER INVES OF WALL EFFECTS ON SUPERCavitating HYDROFOILS OF FINITE SPAN

\*\*HYDROFOIL DATA IN NONDIMENSIONAL FORM (NO CORRECTIONS APPLIED)\*\*

RUN NO	ALPHA	CL	CDUNC	CM	L/D	D/L	RE*10**6
H-21.-01	21.01	1.0606	0.3740	0.1238	2.8355	0.3527	1.1750
H-21.-02	21.01	1.0460	0.3716	0.1178	2.8148	0.3553	1.1686
H-21.-03	21.01	1.0159	0.3683	0.1130	2.7582	0.3625	1.1667
H-21.-04	21.01	0.9974	0.3633	0.1098	2.7457	0.3642	1.1648
H-21.-05	21.01	0.9560	0.3566	0.1070	2.6805	0.3731	1.1629
H-21.-06	21.01	0.9497	0.3565	0.1065	2.6642	0.3753	1.1583
H-21.-07	21.01	0.9739	0.3603	0.1075	2.7032	0.3699	1.1614
H-21.-08	21.01	0.5045	0.3433	0.1029	2.6351	0.3795	1.1621
H-21.-09	21.01	0.8539	0.3322	0.1004	2.5702	0.3891	1.1610
H-21.-10	21.01	0.8127	0.3209	0.0990	2.5328	0.3948	1.1614
H-21.-11	21.01	0.7571	0.3045	0.0969	2.4864	0.4022	1.1625
H-21.-12	21.01	0.7102	0.2839	0.0953	2.5014	0.3998	1.1614
H-21.-13	21.01	0.6585	0.2637	0.0928	2.4967	0.4005	1.1625
H-21.-14	21.01	0.6277	0.2505	0.0923	2.5058	0.3991	1.1625
H-21.-15	21.01	0.6056	0.2409	0.0909	2.5140	0.3978	1.1595
H-21.-16	21.01	0.5758	0.2301	0.0888	2.5019	0.3997	1.1579
H-21.-17	21.01	0.5524	0.2208	0.0873	2.5021	0.3997	1.1556
H-21.-18	21.01	0.5441	0.2172	0.0870	2.5053	0.3992	1.1541

LEGEND

ALPHA GEOMETRIC ANGLE OF ATTACK CORRECTED FOR SHAFT TWIST

CL LIFT COEFFICIENT, NONDIMENSIONALIZED ON UPSTREAM VELOCITY AND MODEL PLANFORM AREA

CDUNC CD(UNCORRECTED), THE UNCORRECTED DRAG COEFFICIENT AS COMPUTED FROM MEASURED DRAG, AND NONDIMENSIONALIZED ON UPSTREAM VELOCITY AND MODEL PLANFORM AREA

CM MOMENT COEFFICIENT, NONDIMENSIONALIZED ON UPSTREAM VELOCITY, MODEL PLANFORM AREA, AND MEAN CHORD

L/D LIFT-TO-DRAG RATIO = CL/CDUNC

D/L DRAG-TO-LIFT RATIO = CDUNC/CL

RE REYNOLDS NUMBER, BASED ON MEAN CHORD



\*\*PRIOR DATA CORRECTED FOR EFFECTS OF IMAGES OF TRAILING VORTEX SYSTEM\*\*

ROW NO	ALPHAT	CL	CD	CH	(D/L)	SIGV/AT	SIGC/AT	CL/AT	CD/AT2	CH/AT	SIGV	SIGC	CAVLTH	COMMENTS/REMARKS
K-21.-01	21.65	1.061	0.386	0.124	0.364	3.299	1.999	2.807	2.702	0.328	1.246	0.755	0.80	
M-21.-02	21.64	1.046	0.383	0.118	0.366	3.112	2.022	2.770	2.686	0.312	1.175	0.763	0.85	
M-21.-03	21.62	1.016	0.379	0.113	0.373	2.899	2.011	2.692	2.662	0.299	1.094	0.759	0.89	
M-21.-04	21.61	0.997	0.374	0.110	0.375	2.683	1.969	2.645	2.627	0.291	1.012	0.743	0.96	
M-21.-05	21.58	0.956	0.366	0.107	0.383	2.506	1.949	2.538	2.581	0.284	0.944	0.734	1.03	
M-21.-06*	21.58	0.950	0.366	0.106	0.385	2.495	1.994	2.522	2.579	0.283	0.939	0.751	---	
M-21.-07*	21.59	0.974	0.370	0.108	0.380	2.488	1.992	2.584	2.606	0.285	0.938	0.751	---	
K-21.-08	21.55	0.905	0.352	0.103	0.389	2.251	1.836	2.405	2.486	0.274	0.847	0.690	1.10	
M-21.-09	21.52	0.854	0.340	0.100	0.398	2.019	1.703	2.273	2.409	0.267	0.759	0.640	1.25	
M-21.-10	21.50	0.813	0.328	0.099	0.403	1.840	1.625	2.166	2.328	0.264	0.690	0.610	1.40	
M-21.-11	21.46	0.757	0.310	0.097	0.410	1.660	1.506	2.021	2.212	0.259	0.622	0.564	1.42	
M-21.-12	21.43	0.710	0.289	0.095	0.407	1.485	1.382	1.898	2.066	0.255	0.555	0.517	1.75	
M-21.-13	21.40	0.658	0.268	0.093	0.407	1.294	1.222	1.763	1.922	0.248	0.480	0.457	2.10	
M-21.-14	21.38	0.628	0.255	0.092	0.406	1.164	1.134	1.682	1.828	0.247	0.434	0.423	2.40	
M-21.-15	21.37	0.606	0.245	0.091	0.404	1.079	1.051	1.623	1.759	0.244	0.402	0.392	2.80	
M-21.-16	21.35	0.576	0.234	0.089	0.406	0.960	0.934	1.545	1.682	0.238	0.358	0.348	3.55	
M-21.-17	21.34	0.552	0.224	0.087	0.405	0.882	0.858	1.483	1.615	0.234	0.329	0.320	3.78	
M-21.-18	21.33	0.544	0.220	0.087	0.405	0.832	0.810	1.461	1.589	0.234	0.310	0.302	---	

UNLESS OTHERWISE INDICATED, ALL DATA ARE FOR:

1. SUPERCavitating FLOW.
2. BOTH STATIC PRESSURE TAPS OPEN.

LEGEND

+ ONLY UPSTREAM STATIC PRESSURE TAP UTILIZED  
\* ONLY DNSTREAM STATIC PRESSURE TAP UTILIZED

PC PARTIALLY CAVITATING

PC(TW) PARTIALLY CAVITATING (TAP WETTED)

FW FULLY WETTED

AT (ALPHAT) (TRUE) ANGLE OF ATTACK, CORRECTED FOR EFFECTS OF IMAGES OF TRAILING VORTICES

AT2 ALPHAT\*2

SIGC CAVITATION NUMBER COMPUTED WITH MEASURED CAVITY PRESSURE

SIGV CAVITATION NUMBER COMPUTED WITH CALCULATED VAPOR PRESSURE

CD DRAG COEFFICIENT, CORRECTED FOR EFFECTS OF IMAGES OF TRAILING VORTICES

(D/L) CORRECTED DRAG-TO-LIFT RATIO = CD/CL

CAVLTH CAVITY LENGTH MEASURED FROM MIDCHORD AT CENTROID POSITION, NONDIMENSIONALIZED ON MEAN CHORD (OBTAINED FROM PHOTOGRAPHS)



EXPER INVES OF WALL EFFECTS ON SUPERCavitating HYDROFOILS OF FINITE SPAN

HYDROFOIL INPUT DATA  
TR TT AREA SPAN MAC  
79 96 90.0 15.0 6.03

ZERO READINGS AND TUNNEL TEMP BEFORE AND AFTER

MANOH 1-N 1-R 2-R 3-R 3-R TT  
0. 0.0 0.0 0.0 100.0 0.0 100.0 95.5  
0. 0.0 0.0 0.0 100.0 0.0 104.0 97.0  
CELL LBS/CT(NORMAL/REV) #1=0.20000 #2=0.20000 #3=0.04030  
TWIST= 7200.0 SHAFT DIA.= 1.50IN

\*\*INPUT DATA AS RECORDED\*\*

RUN NO	MANOH	S	#1	S	#2	S	#3	PINP	PCAV
L-8.0-01	1213.		-1218.0	R	141.0	R	980.0	172.	48.
L-8.0-02	1204.		-1022.0	R	137.5	R	914.0	154.	47.
L-8.0-03+	1204.		-968.0	R	137.0	R	892.0	153.	48.
L-8.0-04*	1201.		-1062.0	R	138.0	R	932.0	153.	48.
L-8.0-05	1205.		-818.0	R	135.0	R	812.0	134.	46.
L-8.0-06	1207.		-648.0	R	132.0	R	705.0	117.	46.
L-8.0-07	1207.		-548.0	R	128.8	R	619.0	104.	46.
L-8.0-08+	1185.		-488.0	R	126.9	R	576.0	103.	46.
L-8.0-09*	1207.		-566.0	R	129.5	R	639.0	102.	47.
L-8.0-10	1200.		-498.0	R	127.8	R	583.0	93.	47.
L-8.0-11+	1080.		-452.0	R	124.0	R	545.0	102.	47.
L-8.0-12*	1193.		-522.0	R	128.4	R	606.0	90.	53.

LEGEND TR ROOM TEMPER (DEG FAHR) LOAD CELL #1 LIPT (COUNTS) #2 MOMENT ABOUT MIDCHORD (COUNTS) #3 DRAG (COUNTS)

TT TUNNEL " ( " )

AREA HALF-SPAN MODEL PLANFORM AREA (SQ IN)

SPAN FOIL HALF-SPAN (IN)

MAC MEAN CHORD, MEAS. @ MODEL CENTROID (IN)

MANOH VELOCITY MANOMETER READING (MM)

TTIST SHAFT TWIST (DEGREES/IN-LB)

S LOAD CELL POLARITY (N=NORMAL, R=REVERSE)

PINP STATIC PRESSURE (MM HG)

PCAV CAVITY PRESSURE (MM HG)

RUN NO 0-XXX-YY: 0=FOIL TESTED(S=SMALL, M=MED, L=LARGE)

XXX=GEOMETRIC ATTACK ANGLE (DEGREES)

YY=RUN NUMBER, THIS FOIL @ THIS ANGLE



EXPER INVES OF WALL EFFECTS ON SUPERCAVITATING HYDROFOILS OF FINITE SPAN

INPUT DATA CORRECTED FOR ZERO READINGS, SIGNS, AND HYDROSTATIC PRESSURE

RUN NO	RAWOE	#1	#2	#3	PINP	PCAV
L-8.0-01	1213.	-1218.0	-41.0	-880.0	165.	48.
L-8.0-02	1204.	-1022.0	-37.5	-813.6	147.	47.
L-8.0-03	1204.	-968.0	-37.0	-791.3	146.	48.
L-8.0-04	1201.	-1062.0	-38.0	-830.9	146.	48.
L-8.0-05	1205.	-818.0	-35.0	-710.5	127.	46.
L-8.0-06	1207.	-648.0	-32.0	-603.2	110.	46.
L-8.0-07	1207.	-548.0	-28.8	-516.8	97.	46.
L-8.0-08	1185.	-488.0	-26.9	-473.5	96.	46.
L-8.0-09	1207.	-566.0	-29.5	-536.1	95.	47.
L-8.0-10	1200.	-498.0	-27.8	-479.7	86.	47.
L-8.0-11	1080.	-452.0	-24.0	-441.4	95.	47.
L-8.0-12	1193.	-522.0	-28.4	-502.0	83.	53.





EXPER INVES OF WALL EFFECTS ON SUPERCavitating HYDROFOILS OF FINITE SPAN

\*\*HYDROFOIL DATA REDUCTION\*\*

RUN NO	ALPHA	LIFT-LB	DRAG-LB	NON-INLB	VEL-PPS
L-8-0-01	8.02	251.80	35.46	147.60	25.91
L-8-0-02	8.02	211.90	32.79	135.00	25.82
L-8-0-03	8.02	201.00	31.89	133.20	25.82
L-8-0-04	8.02	220.00	33.49	136.80	25.79
L-8-0-05	8.02	170.60	28.63	126.00	25.83
L-8-0-06	8.02	136.00	24.31	115.20	25.85
L-8-0-07	8.01	115.36	20.83	103.68	25.85
L-8-0-08	8.01	102.98	19.08	96.84	25.63
L-8-0-09	8.01	119.10	21.60	106.20	25.85
L-8-0-10	8.01	105.16	19.33	100.08	25.78
L-8-0-11	8.01	95.20	17.79	86.40	24.54
L-8-0-12	8.01	110.08	20.23	102.24	25.71

LEGEND VEL UPSTREAM VELOCITY (U)



\*\*HYDROFOIL DATA IN NONDIMENSIONAL FORM (NO CORRECTIONS APPLIED)\*\*

RUN NO	ALPHA	CL	CDUNC	CM	L/D	D/L	RE*10**-6
L-8-0-01	8.02	0.6219	0.0831	0.0605	7.4828	0.1336	1.6185
L-8-0-02	8.02	0.5270	0.0771	0.0557	6.8382	0.1862	1.6129
L-8-0-03	8.02	0.4999	0.0748	0.0549	6.6807	0.1497	1.6129
L-8-0-04	8.02	0.5484	0.0790	0.0566	6.9428	0.1440	1.6111
L-8-0-05	8.02	0.4240	0.0667	0.0519	6.3581	0.1573	1.6136
L-8-0-06	8.02	0.3375	0.0558	0.0474	6.0438	0.1655	1.6148
L-8-0-07	8.01	0.2863	0.0472	0.0427	6.0645	0.1649	1.6148
L-8-0-08	8.01	0.2599	0.0437	0.0405	5.9516	0.1680	1.6010
L-8-0-09	8.01	0.2955	0.0491	0.0437	6.0155	0.1662	1.6148
L-8-0-10	8.01	0.2624	0.0438	0.0414	5.9967	0.1668	1.6104
L-8-0-11	8.01	0.2620	0.0444	0.0394	5.8960	0.1696	1.5334
L-8-0-12	8.01	0.2761	0.0463	0.0425	5.9686	0.1675	1.6061

LEGEND

ALPHA GEOMETRIC ANGLE OF ATTACK CORRECTED FOR SHAP TWIST

CL LIFT COEFFICIENT, NONDIMENSIONALIZED ON UPSTREAM VELOCITY AND MODEL PLANFORM AREA

CDUNC CL(UNCORRECTED), THE UNCORRECTED DRAG COEFFICIENT AS COMPUTED FROM MEASURED DRAG, AND NONDIMENSIONALIZED ON UPSTREAM VELOCITY AND MODEL PLANFORM AREA

CM MOMENT COEFFICIENT, NONDIMENSIONALIZED ON UPSTREAM VELOCITY, MODEL PLANFORM AREA, AND MEAN CHORD

L/D LIFT-TO-DRAG RATIO = CL/CDUNC

D/L DRAG-TO-LIFT RATIO = CDUNC/CL

RE REYNOLDS NUMBER, BASED ON MEAN CHORD



EXPER INVES OF WALL EFFECTS ON SUPERCAVITATING HYDROFOILS OF FINITE SPAN

\*\*PRIOR DATA CORRECTED FOR EFFECTS OF IMAGES OF TRAILING VORTEX SYSTEM\*\*

RUN NO	ALPHAT	CL	CD	CM	(D/L)	SIGV/AT	SIGC/AT	CL/AT	CD/AT2	CM/AT	SIGV	SIGC	CAVLTH	COMMENTS/REMARKS
L-8.0-01	8.76	0.622	0.091	0.060	0.147	3.444	3.297	4.069	3.900	0.396	0.526	0.504	0.68	
L-8.0-02	8.64	0.527	0.083	0.056	0.157	2.992	2.876	3.493	3.639	0.369	0.451	0.434	0.78	
L-8.0-03*	8.61	0.500	0.080	0.055	0.160	2.969	2.830	3.326	3.542	0.366	0.446	0.425	----	
L-8.0-04*	8.67	0.548	0.085	0.057	0.155	2.951	2.817	3.625	3.722	0.374	0.446	0.426	----	
L-8.0-05	8.52	0.424	0.070	0.052	0.166	2.435	2.363	2.851	3.184	0.349	0.362	0.351	0.96	
L-8.0-06	8.42	0.337	0.058	0.047	0.172	1.956	1.889	2.297	2.697	0.323	0.287	0.277	1.38	
L-8.0-07	8.35	0.286	0.049	0.043	0.171	1.580	1.518	1.963	2.300	0.293	0.230	0.221	2.15	
L-8.0-08*	8.32	0.260	0.045	0.041	0.173	1.578	1.520	1.790	2.137	0.279	0.229	0.221	2.65	
L-8.0-09*	8.37	0.296	0.051	0.044	0.172	1.508	1.427	2.024	2.390	0.299	0.220	0.208	----	
L-8.0-10	8.33	0.262	0.045	0.041	0.172	1.249	1.173	1.806	2.140	0.285	0.182	0.170	----	
L-8.0-11*	8.32	0.262	0.046	0.039	0.175	1.669	1.591	1.804	2.173	0.271	0.242	0.231	----	
L-8.0-12*	8.34	0.276	0.048	0.043	0.173	1.152	0.907	1.897	2.257	0.292	0.168	0.132	----	

QUESTIONABLE  
QUESTIONABLE

UNLESS OTHERWISE INDICATED, ALL DATA ARE FOR:

1. SUPERCAVITATING FLOW.
2. BOTH STATIC PRESSURE TAPS OPEN.

LEGEND

+ ONLY DOWNSTREAM STATIC PRESSURE TAP UTILIZED

\* ONLY DOWNSTREAM STATIC PRESSURE TAP UTILIZED

PC PARTIALLY CAVITATING

PC(TW) PARTIALLY CAVITATING (TAP WETTED)

FW FULLY WETTED

AT (ALPHAT) (TRUE) ANGLE OF ATTACK, CORRECTED FOR EFFECTS OF IMAGES OF TRAILING VORTICES

AT2 ALPHAT\*2

SIGC CAVITATION NUMBER COMPUTED WITH MEASURED CAVITY PRESSURE

SIGV CAVITATION NUMBER COMPUTED WITH CALCULATED VAPOR PRESSURE

CD DRAG COEFFICIENT, CORRECTED FOR EFFECTS OF IMAGES OF TRAILING VORTICES

(D/L) CORRECTED DRAG-TO-LIFT RATIO = CD/CL

CAVLTH CAVITY LENGTH MEASURED FROM MIDCHORD AT CENTROID POSITION, NONDIMENSIONALIZED ON MEAN CHORD  
(OBTAINED FROM PHOTOGRAPHS)



TR	TT	AREA	SPAN	HAC
77	85	90.0	15.0	6.03

### ZERO READINGS AND TUNNEL TEMP BEFORE AND AFTER

HAZARD	1-N	1-B	2-N	2-B	3-N	3-B	TT
0.	0.0	0.0	0.0	100.0	0.0	100.0	83.0
0.	0.0	0.0	0.0	102.0	0.0	100.0	86.0

CELL LBS/CT(NORMAL/REV) #1=0.20000 #2=0.20000 #3=0.04030

TWIST= 7200.0 SHAFT DIA.= 1.50IN

♦♦INPUT DATA AS RECORDED♦

RUN NO	MANOM	S	#1	S	#2	S	#3	PINP	PCAV
L-9.5-01	383.	-442.0	R	130.0	R	435.0			
L-9.5-02	991.	-1100.0	R	174.5	R	941.0			PH
L-9.5-03	1252.	-1368.0	R	192.2	R	1140.0			PH
L-9.5-04	1254.	-1392.0	R	197.2	R	1113.0			PC(TW)
L-9.5-05	1252.	-1440.0	R	198.5	R	1082.0			PC(TW)
L-9.5-06	1245.	-1550.0	R	185.9	R	1150.0			PC(TW)
L-9.5-07	1240.	-1650.0	R	161.8	R	1288.0			40.
L-9.5-08	1230.	-1530.0	R	153.3	R	1295.0			39.
L-9.5-09+	1227.	-1484.0	R	152.0	R	1288.0			38.
L-9.5-10	1226.	-1368.0	R	149.5	R	1255.0			172.
L-9.5-11+	1233.	-1320.0	R	149.0	R	1237.0			37.
L-9.5-12	1243.	-1182.0	R	147.6	R	1181.0			156.
L-9.5-13+	1248.	-1140.0	R	147.0	R	1157.0			156.
L-9.5-14	1255.	-1014.0	R	145.1	R	1080.0			140.
L-9.5-15+	1255.	-966.0	R	144.6	R	1047.0			140.
L-9.5-16	1256.	-886.0	R	143.0	R	1085.0			126.
L-9.5-17+	1256.	-846.0	R	141.5	R	950.0			127.
L-9.5-18	1257.	-808.0	R	140.7	R	922.0			116.
L-9.5-19+	1258.	-752.0	R	140.3	R	887.0			116.
L-9.5-20	1257.	-682.0	R	138.1	R	824.0			104.
L-9.5-21+	1255.	-644.0	R	137.2	R	792.0			104.
L-9.5-22	1242.	-622.0	R	136.4	R	768.0			94.
L-9.5-23+	1182.	-578.0	R	134.5	R	721.0			96.
L-9.5-24	1253.	-1658.0	R	161.5	R	1284.0			210.
L-9.5-25	905.	-1216.0	R	151.6	R	948.0			41.
L-9.5-26	680.	-900.0	R	134.2	R	767.0			133.
L-9.5-27	589.	-750.0	R	127.1	R	686.0			37.

TR ROOM TEMPER (DEG FAHR)

IT TUNNEL " ( " " )

AREA HALF-SPAN MODEL PLANKFORM AREA (SQ IN)

SPAN POIL HALF-SPAN (IN)

HAC MEAN CHORD, MEAS. @ MODEL CENTROID(IN)

MANOM VELOCITY MANOMETER READING (MM)

TWIST SHAFT TWIST (DEGREES/IN-LB)

S LOAD CELL POLARITY (N=NORMAL, R=REVERSE)

LOAD CELL #1 LIPT (COUNTS)

#2 MOMENT ABOUT MIDCHORD (COUNTS)

#3 DRAG (COUNTS)

PINP STATIC PRESSURE (MM HG)

PCAV CAVITY PRESSURE (MM HG)

RUN NO Q-III-YI: Q=POIL TESTED (S=SMALL, M=MED, L=LARGE)

XIX=GEOMETRIC ATTACK ANGLE (DEGREES)

YY=RUN NUMBER, THIS POIL @ THIS ANGLE





EXPER INVES OF WALL EFFECTS ON SUPERCAVITATING HYDROPOILS OF FINITE SPAN

INPUT DATA CORRECTED FOR ZERO READINGS, SIGNS, AND HYDROSTATIC PRESSURE

RUN NO	HANOM	#1	#2	#3	PINP	PCAV
L-9.5-01	383.	-442.0	-30.0	-335.0	735.	----
L-9.5-02	991.	-1100.0	-74.4	-841.0	688.	----
L-9.5-03	1252.	-1368.0	-92.0	-1040.0	658.	----
L-9.5-04	1254.	-1392.0	-97.0	-1013.0	274.	----
L-9.5-05	1252.	-1440.0	-98.2	-982.0	241.	----
L-9.5-06	1245.	-1550.0	-85.5	-1050.0	218.	----
L-9.5-07	1240.	-1650.0	-61.3	-1188.0	201.	40.
L-9.5-08	1230.	-1530.0	-52.8	-1195.0	183.	39.
L-9.5-09	1227.	-1484.0	-51.4	-1188.0	183.	38.
L-9.5-10	1226.	-1368.0	-48.8	-1155.0	165.	37.
L-9.5-11	1233.	-1320.0	-48.2	-1137.0	165.	37.
L-9.5-12	1243.	-1182.0	-46.8	-1081.0	149.	37.
L-9.5-13	1248.	-1140.0	-46.1	-1057.0	149.	37.
L-9.5-14	1255.	-1014.0	-44.1	-980.0	133.	36.
L-9.5-15	1255.	-966.0	-43.5	-947.0	133.	34.
L-9.5-16	1256.	-886.0	-41.8	-985.0	119.	33.
L-9.5-17	1256.	-846.0	-40.3	-850.0	120.	33.
L-9.5-18	1257.	-808.0	-39.4	-822.0	109.	33.
L-9.5-19	1258.	-752.0	-38.9	-787.0	109.	33.
L-9.5-20	1257.	-682.0	-36.6	-724.0	97.	33.
L-9.5-21	1255.	-644.0	-35.7	-692.0	97.	32.
L-9.5-22	1242.	-622.0	-34.8	-668.0	87.	32.
L-9.5-23	1182.	-578.0	-32.8	-621.0	89.	32.
L-9.5-24	1253.	-1658.0	-59.7	-1184.0	203.	42.
L-9.5-25	905.	-1216.0	-49.8	-848.0	162.	41.
L-9.5-26	680.	-900.0	-32.3	-667.0	126.	38.
L-9.5-27	589.	-750.0	-25.1	-586.0	107.	37.



EXPER INVES OF WALL EFFECTS ON SUPERCavitATING HYDROFOILS OF FINITE SPAN

••HYDROFOIL DATA REDUCTION••

RUN NO	ALPHA	LIFT-LB	DRAG-LB	MOM-INLB	VEL-FPS
L-9-5-01	9.51	54.40	13.50	108.00	15.15
L-9-5-02	9.54	234.88	33.89	267.92	23.57
L-9-5-03	9.55	292.01	41.91	331.37	26.28
L-9-5-04	9.55	257.79	40.82	349.09	26.30
L-9-5-05	9.55	307.64	39.57	353.49	26.28
L-9-5-06	9.54	327.10	42.31	307.85	26.21
L-9-5-07	9.53	342.27	47.86	220.82	26.17
L-9-5-08	9.53	316.55	48.16	189.94	26.07
L-9-5-09	9.53	307.08	47.88	184.98	26.04
L-9-5-10	9.52	283.36	46.55	175.71	26.03
L-9-5-11	9.52	273.65	45.82	173.63	26.10
L-9-5-12	9.52	245.75	43.56	168.31	26.19
L-9-5-13	9.52	237.22	42.60	165.88	26.24
L-9-5-14	9.52	211.62	39.49	158.76	26.31
L-9-5-15	9.52	201.90	38.16	156.68	26.31
L-9-5-16	9.52	185.57	39.70	150.65	26.32
L-9-5-17	9.52	177.25	34.25	144.97	26.32
L-9-5-18	9.52	169.48	33.13	141.81	26.33
L-9-5-19	9.52	158.18	31.72	140.10	26.34
L-9-5-20	9.52	143.73	29.18	131.90	26.33
L-9-5-21	9.52	135.93	27.89	128.38	26.31
L-9-5-22	9.52	131.36	26.92	125.22	26.19
L-9-5-23	9.52	122.16	25.03	118.11	25.59
L-9-5-24	9.53	343.55	47.72	215.03	26.29
L-9-5-25	9.52	253.15	34.17	179.11	22.60
L-9-5-26	9.52	186.46	26.88	116.20	19.78
L-9-5-27	9.51	155.02	23.62	90.36	18.51

LEGEND VEL UPSTREAM VELOCITY (U)



EXPER INVES OF WALL EFFECTS ON SUPERCavitating HYDROFOILS OF FINITE SPAN

\*\*HYDROFOIL DATA IN NONDIMENSIONAL FORM (NO CORRECTIONS APPLIED)\*\*

RUN NO	ALPHA	CL	CDUNC	CM	L/D	D/L	RE**10**-6
L-9-5-01	9.51	0.6809	0.0925	0.1292	7.3628	0.1358	0.8639
L-9-5-02	9.54	0.6995	0.0963	0.1323	7.2612	0.1377	1.3444
L-9-5-03	9.55	0.6996	0.0959	0.1317	7.2963	0.1371	1.4989
L-9-5-04	9.55	0.7124	0.0931	0.1385	7.6493	0.1307	1.5000
L-9-5-05	9.55	0.7370	0.0903	0.1404	8.1635	0.1225	1.4989
L-9-5-06	9.54	0.7877	0.0974	0.1230	8.0898	0.1236	1.4950
L-9-5-07	9.53	0.8274	0.1112	0.0885	7.4403	0.1344	1.4922
L-9-5-08	9.53	0.7710	0.1128	0.0767	6.8374	0.1863	1.4866
L-9-5-09	9.53	0.7896	0.1123	0.0749	6.6729	0.1899	1.4849
L-9-5-10	9.52	0.6922	0.1092	0.0712	6.3406	0.1577	1.4843
L-9-5-11	9.52	0.6650	0.1068	0.0700	6.2255	0.1606	1.4883
L-9-5-12	9.52	0.5927	0.1005	0.0673	5.8953	0.1696	1.4939
L-9-5-13	9.52	0.5700	0.0978	0.0661	5.8267	0.1716	1.4967
L-9-5-14	9.52	0.5059	0.0899	0.0629	5.6282	0.1777	1.5006
L-9-5-15	9.52	0.4826	0.0867	0.0621	5.5667	0.1796	1.5006
L-9-5-16	9.52	0.4433	0.0903	0.0597	4.9092	0.2037	1.5011
L-9-5-17	9.52	0.4234	0.0773	0.0574	5.4776	0.1826	1.5011
L-9-5-18	9.52	0.4045	0.0745	0.0561	5.4268	0.1843	1.5017
L-9-5-19	9.52	0.3773	0.0711	0.0554	5.3049	0.1885	1.5022
L-9-5-20	9.52	0.3431	0.0651	0.0522	5.2685	0.1898	1.5017
L-9-5-21	9.52	0.3249	0.0621	0.0509	5.2295	0.1912	1.5006
L-9-5-22	9.52	0.3171	0.0604	0.0501	5.2452	0.1907	1.4933
L-9-5-23	9.52	0.3088	0.0587	0.0495	5.2593	0.1901	1.4593
L-9-5-24	9.53	0.8224	0.1097	0.0854	7.4971	0.1334	1.4995
L-9-5-25	9.52	0.8203	0.1061	0.0963	7.7306	0.1294	1.2888
L-9-5-26	9.52	0.7883	0.1089	0.0815	7.2369	0.1382	1.1283
L-9-5-27	9.51	0.7491	0.1094	0.0724	6.8500	0.1460	1.0554

LEGEND

ALPHA GEOMETRIC ANGLE OF ATTACK CORRECTED FOR SHAFT THIST

CL LIFT COEFFICIENT, NONDIMENSIONALIZED ON UPSTREAM VELOCITY AND MODEL PLANFORM AREA  
CD(UNCORRECTED), THE UNCORRECTED DRAG COEFFICIENT AS COMPUTED FROM MEASURED DRAG, AND NONDIMENSIONALIZED ON UPSTREAM VELOCITY AND MODEL PLANFORM AREA

CM MOMENT COEFFICIENT, NONDIMENSIONALIZED ON UPSTREAM VELOCITY, MODEL PLANFORM AREA, AND MEAN CHORD

L/D LIFT-TO-DRAG RATIO = CL/CDUNC

D/L DRAG-TO-LIFT RATIO = CDUNC/CL

RE REYNOLDS NUMBER, BASED ON MEAN CHORD



EXPER INVES OF WALL EFFECTS ON SUPERCAVITATING HYDROFOILS OF FINITE SPAN

••PRIOR DATA CORRECTED FOR EFFECTS OF IMAGES OF TRAILING VORTEX SYSTEM••

RUN NO	ALPHAT	CL	CD	CM	(D/L)	SIGV/AT	SIGC/AT	CL/AT	CD/AT2	CM/AT	SIGV	SIGC	CAVLTH	COMMENTS/REMARKS
L-9.5-01	10.32	0.681	0.102	0.129	0.150	-----	-----	3.779	3.145	0.717	-----	-----	----	PW
L-9.5-02	10.37	0.699	0.106	0.132	0.152	-----	-----	3.866	3.252	0.731	-----	-----	----	PW
L-9.5-03	10.38	0.700	0.106	0.132	0.152	-----	-----	3.863	3.733	0.727	-----	-----	----	PW
L-9.5-04	10.39	0.712	0.104	0.138	0.145	-----	-----	3.927	3.149	0.763	-----	-----	----	PC (TW)
L-9.5-05	10.42	0.737	0.102	0.140	0.138	-----	-----	4.051	3.068	0.772	-----	-----	----	PC (TW)
L-9.5-06	10.48	0.788	0.110	0.123	0.140	-----	-----	4.308	3.296	0.672	-----	-----	----	PC (TW)
L-9.5-07	10.51	0.827	0.125	0.089	0.152	3.938	3.698	4.510	3.725	0.882	0.722	0.678	----	
L-9.5-08	10.44	0.771	0.106	0.077	0.162	3.573	3.356	4.231	3.766	0.421	0.651	0.611	----	
L-9.5-09+	10.41	0.750	0.124	0.075	0.165	3.588	3.395	4.124	3.752	0.412	0.652	0.617	0.70	
L-9.5-10	10.35	0.692	0.119	0.071	0.172	3.188	3.020	3.834	3.653	0.394	0.576	0.545	----	
L-9.5-11+	10.31	0.665	0.116	0.070	0.174	3.178	3.014	3.694	3.580	0.389	0.572	0.542	0.74	
L-9.5-12	10.23	0.593	0.108	0.067	0.182	2.802	2.640	3.321	3.384	0.377	0.500	0.471	----	
L-9.5-13+	10.20	0.570	0.105	0.066	0.183	2.797	2.637	3.202	3.300	0.371	0.498	0.469	0.82	
L-9.5-14	10.12	0.506	0.095	0.063	0.188	2.424	2.290	2.863	3.050	0.356	0.428	0.405	----	
L-9.5-15+	10.09	0.483	0.092	0.062	0.190	2.428	2.344	2.739	2.949	0.353	0.428	0.413	1.11	
L-9.5-16	10.05	0.443	0.094	0.060	0.213	2.103	2.045	2.528	3.069	0.340	0.369	0.359	----	
L-9.5-17+	10.02	0.423	0.081	0.057	0.191	2.129	2.074	2.420	2.647	0.328	0.372	0.363	1.20	
L-9.5-18	10.00	0.405	0.078	0.056	0.193	1.868	1.815	2.318	2.559	0.322	0.326	0.317	----	
L-9.5-19+	9.97	0.377	0.074	0.055	0.196	1.870	1.819	2.169	2.448	0.319	0.325	0.317	1.68	
L-9.5-20	9.93	0.343	0.068	0.052	0.197	1.589	1.541	1.980	2.251	0.301	0.275	0.267	----	
L-9.5-21+	9.90	0.325	0.064	0.051	0.198	1.592	1.570	1.880	2.153	0.294	0.275	0.271	2.28	
L-9.5-22	9.89	0.317	0.063	0.050	0.197	1.363	1.344	1.836	2.097	0.290	0.235	0.232	----	
L-9.5-23+	9.88	0.309	0.061	0.050	0.197	1.477	1.460	1.790	2.040	0.287	0.255	0.252	3.80	
L-9.5-24	10.51	0.822	0.124	0.085	0.150	3.904	3.664	4.486	3.680	0.466	0.716	0.672	----	
L-9.5-25	10.50	0.820	0.120	0.096	0.146	4.022	3.732	4.477	3.576	0.525	0.737	0.684	----	PC
L-9.5-26	10.45	0.788	0.122	0.081	0.154	3.814	3.560	4.322	3.660	0.447	0.696	0.649	----	PC
L-9.5-27	10.40	0.749	0.121	0.072	0.161	3.495	3.255	4.127	3.671	0.399	0.634	0.591	----	

UNLESS OTHERWISE INDICATED, ALL DATA ARE FOR:

1. SUPERCAVITATING FLOW.
2. BOTH STATIC PRESSURE TAPS OPEN.

LEGEND

\* ONLY UPSTREAM STATIC PRESSURE TAP UTILIZED  
 \* ONLY DNSTREAM STATIC PRESSURE TAP UTILIZED  
 PC PARTIALLY CAVITATING

PC (TW) PARTIALLY CAVITATING (TAP WETTED)  
 PW FULLY WETTED

AT (ALPHAT) (TRUE) ANGLE OF ATTACK, CORRECTED FOR EFFECTS OF IMAGES OF TRAILING VORTICES  
 AT2 ALPHAT\*2

SIGC CAVITATION NUMBER COMPUTED WITH MEASURED CAVITY PRESSURE  
 SIGV CAVITATION NUMBER COMPUTED WITH CALCULATED VAPOR PRESSURE

CD DRAG COEFFICIENT, CORRECTED FOR EFFECTS OF IMAGES OF TRAILING VORTICES

(D/L) CORRECTED DRAG-TO-LIFT RATIO = CD/CL

CAVLTH CAVITY LENGTH MEASURED FROM MIDCHORD AT CENTROID POSITION, NONDIMENSIONALIZED ON MEAN CHORD  
 (OBTAINED FROM PHOTOGRAPHS)





EXPER INVES OF WALL EFFECTS ON SUPERCAVING HYDROFOILS OF FINITE SPAN

HYDROFOIL INPUT DATA  
 TS TT AREA SPAN MAC  
 75 82 90.0 15.0 6.03

ZERO READINGS AND TUNNEL TEMP BEFORE AND AFTER

MANOM 1-N 1-R 2-N 2-R 3-N 3-R TT  
 0. 0.0 0.0 0.0 100.0 0.0 100.0 81.0  
 0. 0.0 0.0 0.0 101.5 0.0 95.0 82.5  
 CELL LES/CT(NORMAL/REV) #1=0.20000 #2=0.20000 #3=0.04030  
 TWIST= 7200.0 SHAFT DIA.= 1.50IN

\*\*INPUT DATA AS RECORDED\*\*

RUN NO	MANOM	S	#1	S	#2	S	#3	PINF	PCAV
L-11.-01	1227.		-1796.0	R	163.0	R	1665.0	219.	41.
L-11.-02	1227.		-1620.0	R	157.0	R	1634.0	198.	39.
L-11.-03	1225.		-1466.0	R	154.2	R	1565.0	181.	37.
L-11.-04	1231.		-1316.0	R	151.8	R	1470.0	165.	35.
L-11.-05+	1229.		-1256.0	R	151.2	R	1434.0	165.	35.
L-11.-06*	1229.		-1358.0	R	152.6	R	1506.0	165.	35.
L-11.-07	1238.		-1196.0	R	150.5	R	1388.0	154.	35.
L-11.-08+	1237.		-1140.0	R	149.5	R	1346.0	154.	34.
L-11.-09	1237.		-1048.0	R	148.0	R	1272.0	140.	30.
L-11.-10+	1240.		-1008.0	R	147.5	R	1234.0	139.	29.
L-11.-11	1240.		-916.0	R	144.8	R	1140.0	122.	29.
L-11.-12+	1243.		-858.0	R	144.5	R	1103.0	122.	29.
L-11.-13	1241.		-830.0	R	143.8	R	1074.0	113.	29.
L-11.-14+	1243.		-774.0	R	142.7	R	1018.0	113.	29.
L-11.-15	1246.		-748.0	R	141.9	R	987.0	103.	29.
L-11.-16+	1239.		-696.0	R	140.0	R	933.0	102.	29.
L-11.-17	1238.		-710.0	R	141.0	R	950.0	94.	29.
L-11.-18+	1105.		-638.0	R	136.2	R	862.0	97.	29.
L-11.-19	1026.		-882.0	R	140.9	R	1085.0	123.	31.
L-11.-20+	1028.		-860.0	R	140.6	R	1059.0	124.	30.

LEGEND TR ROOM TEMPER (DEG FAHR) LOAD CELL #1 LIFT (COUNTS)  
 TT TUNNEL " ( " " ) #2 MOMENT ABOUT MIDCHORD (COUNTS)  
 AREA HALF-SPAN MODEL PLANFORM AREA (SQ IN) #3 DRAG (COUNTS)  
 SPAN FOIL HALF-SPAN (IN) PINF STATIC PRESSURE (MM HG)  
 MAC MEAN CHORD, MEAS. @ MODEL CENTROID (IN) PCAV CAVITY PRESSURE (MM HG)  
 MANOM VELOCITY MANOMETER READING (MM) RUN NO Q-XXX-YY: Q=FOIL TESTED(S=SMALL, M=MED, L=LARGE)  
 TWIST SHAFT TWIST (DEGREES/IN-LB) IXX=GEOMETRIC ATTACK ANGLE (DEGREES)  
 S LOAD CELL POLARITY (N=NORMAL, R=REVERSE) IY=RUN NUMBER, THIS FOIL @ THIS ANGLE



EXPER INVES OF WALL EFFECTS ON SUPERCAVITATING HYDROFOILS OF FINITE SPAN

INPUT DATA CORRECTED FOR ZERO READINGS, SIGNS, AND HYDROSTATIC PRESSURE

RUN NO	WAGON	#1	#2	#3	PIMP	PCAV
L-11.-01	1227.	-1796.0	-63.0	-1565.0	212.	41.
L-11.-02	1227.	-1620.0	-56.9	-1534.3	191.	39.
L-11.-03	1225.	-1466.0	-54.0	-1465.5	174.	37.
L-11.-04	1231.	-1316.0	-51.6	-1370.8	158.	35.
L-11.-05	1229.	-1256.0	-50.9	-1335.1	158.	35.
L-11.-06	1229.	-1358.0	-52.2	-1407.3	158.	35.
L-11.-07	1238.	-1196.0	-50.0	-1289.6	147.	35.
L-11.-08	1237.	-1140.0	-48.9	-1247.8	147.	34.
L-11.-09	1237.	-1048.0	-47.4	-1174.1	133.	30.
L-11.-10	1240.	-1008.0	-46.8	-1136.4	132.	29.
L-11.-11	1240.	-916.0	-44.0	-1042.6	115.	29.
L-11.-12	1243.	-858.0	-43.6	-1005.9	115.	29.
L-11.-13	1241.	-830.0	-42.9	-977.2	106.	29.
L-11.-14	1243.	-774.0	-41.7	-921.4	106.	29.
L-11.-15	1246.	-748.0	-40.8	-890.7	96.	29.
L-11.-16	1239.	-696.0	-38.8	-836.9	95.	29.
L-11.-17	1238.	-710.0	-39.7	-854.2	87.	29.
L-11.-18	1105.	-638.0	-34.9	-766.5	90.	29.
L-11.-19	1026.	-882.0	-39.5	-989.7	116.	31.
L-11.-20	1028.	-860.0	-39.1	-964.0	117.	30.



EXPER INVES OF WALL EFFECTS ON SUPERCavitating HYDROFOILS OF FINITE SPAN

••HYDROFOIL DATA REDUCTION••

RUN NO	ALPHA	LIFT-LB	DRAG-LB	NOM-INLB	VEL-FPS
L-11-01	11-03	371.80	63.07	226.80	26.04
L-11-02	11-03	335.38	61.83	204.92	26.04
L-11-03	11-03	308.01	59.06	194.55	26.02
L-11-04	11-03	273.51	55.24	185.63	26.08
L-11-05	11-03	261.38	53.80	183.18	26.06
L-11-06	11-03	282.04	56.71	187.94	26.06
L-11-07	11-03	249.21	51.97	180.09	26.15
L-11-08	11-02	237.79	50.29	176.21	26.14
L-11-09	11-02	219.07	47.32	170.53	26.14
L-11-10	11-02	210.96	45.80	168.44	26.17
L-11-11	11-02	192.00	42.02	158.44	26.17
L-11-12	11-02	180.33	40.54	157.07	26.20
L-11-13	11-02	174.57	39.38	154.27	26.18
L-11-14	11-02	163.13	37.13	150.03	26.20
L-11-15	11-02	157.76	35.89	146.86	26.23
L-11-16	11-02	146.96	33.73	139.74	26.16
L-11-17	11-02	149.95	34.42	143.05	26.15
L-11-18	11-02	134.57	30.89	125.49	24.81
L-11-19	11-02	164.30	39.89	142.12	23.96
L-11-20	11-02	179.82	38.85	140.76	23.99

LEGEND VEL UPSTREAM VELOCITY (U)



EXPER INVES OF WALL EFFECTS ON SUPERCavitating HYDROFOILS OF FINITE SPAN

••HYDROFOIL DATA IN NONDIMENSIONAL FORM (NO CORRECTIONS APPLIED)••

RUN NO	ALPHA	CL	CDUNC	CM	L/D	D/L	RN*10**6
L-11--01	11.03	0.9067	0.1493	0.0917	6.0749	0.1646	1.4427
L-11--02	11.03	0.8179	0.1462	0.0829	5.5931	0.1788	1.4427
L-11--03	11.03	0.7425	0.1397	0.0788	5.3152	0.1881	1.4416
L-11--04	11.03	0.6650	0.1298	0.0748	5.1248	0.1951	1.4449
L-11--05	11.03	0.6365	0.1265	0.0740	5.0330	0.1987	1.4438
L-11--06	11.03	0.6868	0.1335	0.0759	5.1425	0.1945	1.4438
L-11--07	11.03	0.6027	0.1211	0.0722	4.9753	0.2010	1.4487
L-11--08	11.02	0.5755	0.1172	0.0707	4.9122	0.2036	1.4481
L-11--09	11.02	0.5302	0.1100	0.0684	4.8216	0.2074	1.4481
L-11--10	11.02	0.5094	0.1060	0.0675	4.8042	0.2082	1.4498
L-11--11	11.02	0.4637	0.0969	0.0635	4.7840	0.2090	1.4498
L-11--12	11.02	0.4345	0.0931	0.0628	4.6657	0.2143	1.4514
L-11--13	11.02	0.4213	0.0905	0.0617	4.6560	0.2148	1.4503
L-11--14	11.02	0.3931	0.0849	0.0599	4.6286	0.2160	1.4514
L-11--15	11.02	0.3793	0.0817	0.0586	4.6396	0.2155	1.4530
L-11--16	11.02	0.3552	0.0770	0.0560	4.6148	0.2167	1.4492
L-11--17	11.02	0.3627	0.0787	0.0574	4.6077	0.2170	1.4487
L-11--18	11.02	0.3618	0.0785	0.0559	4.6112	0.2169	1.3741
L-11--19	11.02	0.5309	0.1103	0.0679	4.8136	0.2077	1.3274
L-11--20	11.02	0.5170	0.1071	0.0671	4.8278	0.2071	1.3287

LEGEND

ALPHA GEOMETRIC ANGLE OF ATTACK CORRECTED FOR SHAFT TWIST

CL LIFT COEFFICIENT, NONDIMENSIONALIZED ON UPSTREAM VELOCITY AND MODEL PLANFORM AREA

CDUNC CD(UNCORRECTED), THE UNCORRECTED DRAG COEFFICIENT AS COMPUTED FROM MEASURED DRAG, AND NONDIMENSIONALIZED

ON UPSTREAM VELOCITY AND MODEL PLANFORM AREA

CM MOMENT COEFFICIENT, NONDIMENSIONALIZED ON UPSTREAM VELOCITY, MODEL PLANFORM AREA, AND MEAN CHORD

L/D LIFT-TO-DRAG RATIO = CL/CDUNC

D/L DRAG-TO-LIFT RATIO = CDUNC/CL

RN REYNOLDS NUMBER, BASED ON MEAN CHORD





EXPER INVES OF WALL EFFECTS ON SUPERCavitating HYDROFOILS OF FINITE SPAN

\*\*PRIOR DATA CORRECTED FOR EFFECTS OF IMAGES OF TRAILING VORTEX SYSTEM\*\*

RUN NO	ALPHAT	CL	CD	CH	(D/L)	SIGV/AT	SIGC/AT	CL/AT	CD/AT2	CH/AT	SIGV	SIGC	CAVLTH	COMMENTS/REMARKS
L-11-01	12.11	0.9C7	0.166	0.092	0.183	3.720	3.440	4.291	3.724	0.434	0.786	0.727	0.72	
L-11-02	12.00	0.818	0.160	0.083	0.196	3.326	3.086	3.906	3.650	0.396	0.697	0.646	0.82	
L-11-03	11.91	0.743	0.151	0.079	0.204	3.007	2.807	3.573	3.499	0.379	0.625	0.583	0.92	
L-11-04	11.81	0.665	0.139	0.075	0.209	2.688	2.529	3.225	3.267	0.363	0.554	0.522	0.95	
L-11-05	11.78	0.636	0.135	0.074	0.212	2.698	2.540	3.096	3.190	0.360	0.555	0.522	---	
L-11-06	11.84	0.687	0.143	0.076	0.209	2.683	2.528	3.323	3.356	0.367	0.554	0.522	---	
L-11-07	11.74	0.603	0.129	0.072	0.213	2.460	2.306	2.942	3.065	0.353	0.504	0.472	1.03	
L-11-08	11.71	0.576	0.124	0.071	0.215	2.467	2.335	2.817	2.971	0.346	0.504	0.477	1.08	
L-11-09	11.65	0.530	0.116	0.068	0.218	2.187	2.139	2.607	2.800	0.337	0.445	0.435	---	
L-11-10	11.63	0.509	0.111	0.067	0.219	2.165	2.138	2.510	2.705	0.332	0.439	0.434	---	
L-11-11	11.57	0.464	0.101	0.063	0.219	1.820	1.795	2.296	2.485	0.314	0.368	0.363	---	
L-11-12	11.54	0.434	0.097	0.063	0.223	1.820	1.796	2.158	2.393	0.312	0.366	0.362	1.68	
L-11-13	11.52	0.421	0.094	0.062	0.224	1.636	1.613	2.095	2.329	0.307	0.329	0.324	---	
L-11-14	11.49	0.393	0.088	0.060	0.224	1.637	1.616	1.961	2.192	0.299	0.328	0.324	2.05	
L-11-15	11.47	0.379	0.085	0.059	0.223	1.425	1.405	1.895	2.110	0.292	0.285	0.281	---	
L-11-16	11.44	0.355	0.080	0.056	0.224	1.414	1.395	1.779	1.996	0.280	0.282	0.279	3.20	
L-11-17	11.45	0.363	0.081	0.057	0.225	1.243	1.227	1.815	2.039	0.287	0.248	0.245	3.12	
L-11-18	11.45	0.362	0.081	0.056	0.224	1.451	1.434	1.811	2.034	0.280	0.290	0.287	4.10	
L-11-19	11.65	0.531	0.116	0.068	0.219	2.167	2.102	2.611	2.809	0.334	0.441	0.427	---	
L-11-20	11.63	0.517	0.113	0.067	0.218	2.189	2.150	2.547	2.732	0.331	0.444	0.437	---	

QUESTIONABLE

UNLESS OTHERWISE INDICATED, ALL DATA ARE FOR:

1. SUPERCavitating FLOW.
2. BOTH STATIC PRESSURE TAPS OPEN.

LEGEND

- + ONLY UPSTREAM STATIC PRESSURE TAP UTILIZED
- \* ONLY DNSTREAM STATIC PRESSURE TAP UTILIZED
- PC PARTIALLY CAVITATING
- PC(TU) PARTIALLY CAVITATING (TAP WETTED)
- FW FULLY WETTED

AT (ALPHAT) (TRUE) ANGLE OF ATTACK, CORRECTED FOR EFFECTS OF IMAGES OF TRAILING VORTICES

AT2 ALPHAT\*\*2

SIGC CAVITATION NUMBER COMPUTED WITH MEASURED CAVITY PRESSURE

SIGV CAVITATION NUMBER COMPUTED WITH CALCULATED VAPOR PRESSURE

CD DRAG COEFFICIENT, CORRECTED FOR EFFECTS OF IMAGES OF TRAILING VORTICES

(D/L) CORRECTED DRAG-TO-LIFT RATIO = CD/CL

CAVLTH CAVITY LENGTH MEASURED FROM MIDCHORD AT CENTROID POSITION, NONDIMENSIONALIZED ON MEAN CHORD (OBTAINED FROM PHOTOGRAPHS)



EXPER INVES OF WALL EFFECTS ON SUPERCAVITATING HYDROFOILS OF FINITE SPAN

HYDROFOIL INPUT DATA

TR TT AREA SPAN MAC  
76 86 90.0 15.0 6.03

ZERO READINGS AND TUNNEL TEMP BEFORE AND AFTER

MANOM 1-N 1-R 2-W 2-R 3-N 3-R TT  
0. 0.0 0.0 0.0 100.0 0.0 100.0 85.5  
0. 0.0 0.0 0.0 99.5 0.0 107.0 88.0  
CELL LBS/CT(NORMAL/REV) #1=0.20000 #2=0.20000 #3=0.04030  
THIST= 7200.0 SHAFT DIA.= 1.50IN

\*\*INPUT DATA AS RECORDED\*\*

RUN NO	MANOM	S	#1	S	#2	S	#3	PINP	PCAV	PW
L-12.-01	476.	-698.0	R	151.6	R	665.0	760.	---	---	---
L-12.-02	774.	-1110.0	R	181.8	R	1004.0	722.	---	---	---
L-12.-03	1160.	-1628.0	R	219.6	R	1420.0	675.	---	---	---
L-12.-04	1165.	-1786.0	R	215.0	R	1518.0	294.	---	---	---
L-12.-05	1163.	-1884.0	R	197.5	R	1670.0	272.	---	---	---
L-12.-06	1167.	-1934.0	R	180.5	R	1797.0	255.	---	---	---
L-12.-07	1166.	-1870.0	R	167.5	R	1840.0	236.	---	---	---
L-12.-08*	1167.	-1830.0	R	164.1	R	1839.0	236.	---	---	---
L-12.-09	1166.	-1730.0	R	159.7	R	1819.0	218.	---	---	---
L-12.-10*	1166.	-1680.0	R	158.2	R	1807.0	218.	---	---	---
L-12.-11	1166.	-1594.0	R	156.0	R	1770.0	202.	---	---	---
L-12.-12*	1166.	-1542.0	R	155.0	R	1745.0	202.	---	---	---
L-12.-13	1165.	-1414.0	R	153.0	R	1670.0	184.	---	---	---
L-12.-14*	1167.	-1364.0	R	152.1	R	1630.0	184.	---	---	---
L-12.-15	1168.	-1276.0	R	150.8	R	1560.0	168.	---	---	---
L-12.-16*	1169.	-1220.0	R	149.9	R	1518.0	168.	---	---	---
L-12.-17	1169.	-1150.0	R	148.6	R	1457.0	154.	---	---	---
L-12.-18*	1169.	-1100.0	R	147.8	R	1413.0	154.	---	---	---
L-12.-19	1169.	-1022.0	R	146.2	R	1335.0	141.	---	---	---
L-12.-20*	1170.	-980.0	R	145.5	R	1285.0	141.	---	---	---
L-12.-21	1171.	-934.0	R	144.0	R	1241.0	130.	---	---	---
L-12.-22*	1169.	-874.0	R	143.4	R	1198.0	129.	---	---	---
L-12.-23	1171.	-850.0	R	142.9	R	1170.0	121.	---	---	---
L-12.-24*	1170.	-810.0	R	142.0	R	1127.0	121.	---	---	---
L-12.-25	1171.	-780.0	R	140.9	R	1084.0	111.	---	---	---
L-12.-26*	1171.	-728.0	R	139.5	R	1031.0	112.	---	---	---
L-12.-27	1171.	-728.0	R	139.5	R	1032.0	101.	---	---	---
L-12.-28*	1160.	-662.0	R	136.0	R	950.0	104.	---	---	---
L-12.-29	1164.	-1410.0	R	152.4	R	1657.0	184.	---	---	---
L-12.-30	900.	-1096.0	R	140.9	R	1320.0	151.	---	---	---
L-12.-31	612.	-708.0	R	127.5	R	905.0	113.	---	---	---
L-12.-32	388.	-498.0	R	118.2	R	643.0	93.	---	---	---

LEGEND TR ROOM TEMPER (DEG FAHR) LOAD CELL #1 LIFT (COUNTS) #2 LIFT (COUNTS)  
 #3 DRAG (COUNTS) #2 MOMENT ABOUT MIDCHORD (COUNTS)  
 AREA HALF-SPAN MODEL PLANEFORM AREA (SQ IN)  
 SPAN FOIL HALF-SPAN (IN)  
 MAC MEAN CHORD, MEAS. @ MODEL CENTROID (IN)  
 MANOM VELOCITY MANOMETER READING (MM)  
 TWIST SHAFT TWIST (DEGREES/IN-LB)  
 S LOAD CELL POLARITY (N=NORMAL, R=REVERSE)

PINP STATIC PRESSURE (MM HG)  
 PCAV CAVITY PRESSURE (MM HG)  
 RUN NO Q-XXX-YY: Q=FOIL TESTED (S=SMALL, M=MED, L=LARGE)  
 XXX=GEOMETRIC ATTACK ANGLE (DEGREES)  
 YY=RUN NUMBER, THIS FOIL @ THIS ANGLE



EXPER INVES OF WALL EFFECTS ON SUPERCAVITATING HYDROFOILS OF FINITE SPAN

INPUT DATA CORRECTED FOR ZERO READINGS, SIGNS, AND HYDROSTATIC PRESSURE

RUN NO	MANOM	#1	#2	#3	PINF	PCAV
L-12-01	476.	-698.0	-51.6	-565.0	753.	----
L-12-02	774.	-1110.0	-81.8	-903.8	715.	----
L-12-03	1160.	-1628.0	-119.6	-1319.5	668.	----
L-12-04	1165.	-1786.0	-115.0	-1417.3	287.	----
L-12-05	1163.	-1884.0	-97.6	-1569.1	265.	----
L-12-06	1167.	-1934.0	-80.6	-1695.9	248.	----
L-12-07	1166.	-1870.0	-67.6	-1738.6	229.	52.
L-12-08	1167.	-1830.0	-64.2	-1737.4	229.	52.
L-12-09	1166.	-1730.0	-59.8	-1717.2	211.	49.
L-12-10	1166.	-1680.0	-58.3	-1705.0	211.	48.
L-12-11	1166.	-1594.0	-56.2	-1667.7	195.	47.
L-12-12	1166.	-1542.0	-55.2	-1642.5	195.	46.
L-12-13	1165.	-1414.0	-53.2	-1567.3	177.	44.
L-12-14	1167.	-1364.0	-52.3	-1527.1	177.	44.
L-12-15	1168.	-1276.0	-51.0	-1456.8	161.	43.
L-12-16	1169.	-1220.0	-50.1	-1414.6	161.	42.
L-12-17	1169.	-1150.0	-48.9	-1353.4	147.	41.
L-12-18	1169.	-1100.0	-48.1	-1309.2	147.	39.
L-12-19	1169.	-1022.0	-46.5	-1230.9	134.	36.
L-12-20	1170.	-980.0	-45.8	-1180.7	134.	36.
L-12-21	1171.	-934.0	-44.3	-1136.5	123.	36.
L-12-22	1169.	-874.0	-43.7	-1093.3	122.	36.
L-12-23	1171.	-850.0	-43.3	-1065.0	114.	36.
L-12-24	1170.	-810.0	-42.4	-1021.8	114.	36.
L-12-25	1171.	-780.0	-41.3	-978.6	104.	36.
L-12-26	1171.	-728.0	-39.9	-925.4	105.	36.
L-12-27	1171.	-728.0	-39.9	-926.1	94.	36.
L-12-28	1160.	-662.0	-36.4	-843.9	97.	36.
L-12-29	1164.	-1410.0	-52.9	-1550.7	177.	45.
L-12-30	900.	-1096.0	-41.4	-1213.5	144.	42.
L-12-31	612.	-708.0	-28.0	-798.2	106.	40.
L-12-32	388.	-498.0	-18.7	-536.0	86.	40.



EXPER INVES OF WALL EFFECTS ON SUPERCavitATING HYDROFOILS OF FINITE SPAN

\*\*HYDROFOIL DATA REDUCTION\*\*

RUN NO	ALPHA	LIFT-LB	DRAG-LB	ROM-INLB	VEL-FPS
L-12.-01	12.03	149.92	22.77	185.76	16.76
L-12.-02	12.04	238.36	36.42	294.54	21.02
L-12.-03	12.06	349.53	53.18	430.68	25.37
L-12.-04	12.06	380.21	57.12	414.17	25.42
L-12.-05	12.05	356.31	63.23	351.23	25.40
L-12.-06	12.04	402.92	68.34	290.09	25.44
L-12.-07	12.03	387.52	70.07	243.35	25.43
L-12.-08	12.03	378.84	70.02	231.17	25.44
L-12.-09	12.03	357.97	69.20	215.38	25.43
L-12.-10	12.03	347.67	68.71	210.04	25.43
L-12.-11	12.03	330.03	67.21	202.18	25.43
L-12.-12	12.03	319.44	66.19	198.64	25.43
L-12.-13	12.03	293.44	63.16	191.50	25.42
L-12.-14	12.03	283.26	61.54	188.31	25.44
L-12.-15	12.03	265.41	58.71	183.69	25.46
L-12.-16	12.03	254.03	57.01	180.51	25.47
L-12.-17	12.02	239.77	54.54	175.89	25.47
L-12.-18	12.02	229.61	52.76	173.07	25.47
L-12.-19	12.02	213.70	49.61	167.37	25.47
L-12.-20	12.02	205.16	47.58	164.90	25.48
L-12.-21	12.02	195.66	45.80	159.56	25.49
L-12.-22	12.02	183.55	44.06	157.46	25.47
L-12.-23	12.02	178.65	42.92	155.72	25.49
L-12.-24	12.02	170.47	41.18	152.54	25.48
L-12.-25	12.02	164.26	39.44	148.63	25.49
L-12.-26	12.02	153.58	37.29	143.65	25.49
L-12.-27	12.02	153.58	37.32	143.71	25.49
L-12.-28	12.02	139.69	34.01	131.17	25.37
L-12.-29	12.03	292.57	62.49	190.27	25.41
L-12.-30	12.02	227.47	48.90	148.92	22.55
L-12.-31	12.01	147.20	32.17	100.74	18.84
L-12.-32	12.01	103.34	21.60	67.32	15.24

LEGEND VEL UPSTREAM VELOCITY (U)





EXPER INVES OF WALL EFFECTS ON SUPERCAVITATING HYDROFOILS OF FINITE SPAN

\*\*HYDROFOIL DATA IN NONDIMENSIONAL FORM (NO CORRECTIONS APPLIED)\*\*

RUN NO	ALPHA	CL	CDUNC	CH	L/D	D/L	Re10 <sup>4</sup> -6
L-12-01	12.03	0.8829	0.1293	0.1814	6.8299	0.1464	0.9650
L-12-02	12.04	0.8929	0.1318	0.1830	6.7764	0.1476	1.2099
L-12-03	12.06	0.8986	0.1322	0.1836	6.7988	0.1471	1.4605
L-12-04	12.06	0.9736	0.1417	0.1759	6.8700	0.1456	1.4634
L-12-05	12.05	1.0164	0.1576	0.1494	6.4480	0.1551	1.4623
L-12-06	12.04	1.0301	0.1702	0.1230	6.0528	0.1652	1.4646
L-12-07	12.03	0.9915	0.1747	0.1033	5.6745	0.1762	1.4640
L-12-08	12.03	0.9685	0.1745	0.0980	5.5516	0.1801	1.4646
L-12-09	12.03	0.9159	0.1725	0.0914	5.3089	0.1884	1.4640
L-12-10	12.03	0.8895	0.1713	0.0891	5.1942	0.1925	1.4640
L-12-11	12.03	0.8444	0.1674	0.0858	5.0437	0.1983	1.4640
L-12-12	12.03	0.8173	0.1648	0.0843	4.9588	0.2017	1.4640
L-12-13	12.03	0.7514	0.1572	0.0813	4.7801	0.2092	1.4634
L-12-14	12.03	0.7242	0.1528	0.0798	4.7397	0.2110	1.4646
L-12-15	12.03	0.6780	0.1454	0.0778	4.6618	0.2145	1.4652
L-12-16	12.03	0.6484	0.1410	0.0764	4.5995	0.2174	1.4658
L-12-17	12.02	0.6120	0.1347	0.0745	4.5444	0.2200	1.4658
L-12-18	12.02	0.5861	0.1301	0.0733	4.5041	0.2220	1.4658
L-12-19	12.02	0.5455	0.1221	0.0708	4.4682	0.2238	1.4658
L-12-20	12.02	0.5232	0.1168	0.0697	4.4794	0.2232	1.4664
L-12-21	12.02	0.4985	0.1122	0.0674	4.4451	0.2250	1.4669
L-12-22	12.02	0.4685	0.1079	0.0667	4.3414	0.2303	1.4658
L-12-23	12.02	0.4553	0.1048	0.0658	4.3427	0.2303	1.4669
L-12-24	12.02	0.4348	0.1005	0.0645	4.3270	0.2311	1.4664
L-12-25	12.02	0.4186	0.0960	0.0628	4.3622	0.2292	1.4669
L-12-26	12.02	0.3914	0.0905	0.0607	4.3251	0.2312	1.4669
L-12-27	12.02	0.3914	0.0906	0.0607	4.3214	0.2314	1.4669
L-12-28	12.02	0.3591	0.0829	0.0559	4.3326	0.2308	1.4605
L-12-29	12.03	0.7497	0.1556	0.0809	4.8184	0.2075	1.4629
L-12-30	12.02	0.7406	0.1546	0.0804	4.7907	0.2087	1.2979
L-12-31	12.01	0.6861	0.1452	0.0779	4.7253	0.2116	1.0847
L-12-32	12.01	0.7361	0.1490	0.0795	4.9411	0.2024	0.8774

LEGEND

ALPHA GEOMETRIC ANGLE OF ATTACK CORRECTED FOR SHAFT TWIST  
 CL LIFT COEFFICIENT, NONDIMENSIONALIZED ON UPSTREAM VELOCITY AND MODEL PLANFORM AREA  
 CDUNC CD (UNCORRECTED), THE UNCORRECTED DRAG COEFFICIENT AS COMPUTED FROM MEASURED DRAG, AND NONDIMENSIONALIZED ON UPSTREAM VELOCITY AND MODEL PLANFORM AREA  
 CH MOMENT COEFFICIENT, NONDIMENSIONALIZED ON UPSTREAM VELOCITY, MODEL PLANFORM AREA, AND MEAN CHORD  
 L/D LIFT-TO-DRAG RATIO = CL/CDUNC  
 D/L DRAG-TO-LIFT RATIO = CDUNC/CL  
 RN REYNOLDS NUMBER, BASED ON MEAN CHORD



## \*\*PRIOR DATA CORRECTED FOR EFFECTS OF IMAGES OF TRAILING VORTEX SYSTEM\*\*

RUN NO	ALPHAT	CL	CD	CM	(D/L)	SIGV/AT	SIGC/AT	CL/AT	CD/AT2	CR/AT	SIGV	SIGC	CAVLTH	COMMENTS/REMARKS
L-12--01	13.07	0.883	0.145	0.181	0.165	-----	-----	3.870	2.793	0.795	-----	-----	---	FW
L-12--02	13.10	0.893	0.148	0.183	0.166	-----	-----	3.906	2.837	0.800	-----	-----	---	FW
L-12--03	13.13	0.899	0.149	0.184	0.166	-----	-----	3.922	2.837	0.802	-----	-----	---	FW
L-12--04	13.21	0.974	0.161	0.176	0.166	-----	-----	4.222	3.034	0.763	-----	-----	---	PC(TW)
L-12--05	13.25	1.016	0.179	0.149	0.176	-----	-----	4.394	3.345	0.646	-----	-----	---	PC(TW)
L-12--06	13.26	1.030	0.192	0.123	0.187	-----	-----	4.450	3.586	0.531	-----	-----	---	PC(TW)
L-12--07	13.21	0.991	0.195	0.103	0.197	3.814	3.424	4.300	3.670	0.448	0.879	0.789	---	---
L-12--08+	13.18	0.969	0.194	0.098	0.200	3.818	3.428	4.210	3.663	0.426	0.878	0.789	0.61	---
L-12--09	13.12	0.916	0.190	0.091	0.207	3.488	3.156	4.001	3.623	0.399	0.798	0.723	---	---
L-12--10+	13.08	0.890	0.188	0.089	0.211	3.495	3.183	3.895	3.598	0.390	0.798	0.727	0.64	---
L-12--11	13.03	0.844	0.182	0.086	0.216	3.194	2.903	3.713	3.523	0.377	0.726	0.660	---	---
L-12--12+	13.00	0.817	0.179	0.084	0.219	3.201	2.930	3.603	3.472	0.372	0.726	0.665	0.74	---
L-12--13	12.92	0.751	0.169	0.081	0.225	2.866	2.634	3.333	3.322	0.361	0.646	0.594	---	---
L-12--14+	12.89	0.724	0.164	0.080	0.226	2.867	2.636	3.220	3.236	0.355	0.645	0.593	1.00	---
L-12--15	12.83	0.678	0.155	0.078	0.229	2.557	2.348	3.028	3.090	0.348	0.573	0.526	---	---
L-12--16+	12.79	0.648	0.150	0.076	0.231	2.561	2.372	2.904	3.002	0.342	0.572	0.530	1.05	---
L-12--17	12.75	0.612	0.142	0.074	0.233	2.288	2.121	2.750	2.876	0.335	0.509	0.472	---	---
L-12--18+	12.72	0.586	0.137	0.073	0.234	2.292	2.166	2.640	2.785	0.330	0.509	0.481	1.18	---
L-12--19	12.67	0.545	0.128	0.071	0.235	2.038	1.974	2.467	2.622	0.320	0.451	0.436	---	---
L-12--20+	12.64	0.523	0.122	0.070	0.234	2.039	1.976	2.371	2.515	0.316	0.450	0.436	1.30	---
L-12--21	12.61	0.493	0.117	0.067	0.235	1.819	1.758	2.265	2.421	0.306	0.400	0.387	---	---
L-12--22+	12.58	0.468	0.112	0.067	0.240	1.805	1.745	2.134	2.334	0.304	0.396	0.383	1.73	---
L-12--23	12.56	0.455	0.109	0.066	0.240	1.641	1.583	2.077	2.270	0.300	0.360	0.347	---	---
L-12--24+	12.54	0.435	0.104	0.065	0.240	1.644	1.587	1.987	2.180	0.295	0.360	0.347	2.10	---
L-12--25	12.52	0.419	0.100	0.063	0.238	1.440	1.386	1.916	2.087	0.288	0.315	0.303	---	---
L-12--26+	12.48	0.391	0.094	0.061	0.239	1.463	1.410	1.796	1.973	0.279	0.319	0.307	3.55	---
L-12--27	12.48	0.391	0.094	0.061	0.240	1.237	1.186	1.796	1.975	0.279	0.270	0.258	---	---
L-12--28+	12.44	0.359	0.086	0.056	0.238	1.312	1.262	1.653	1.814	0.257	0.285	0.274	4.10	---
L-12--29	12.92	0.750	0.167	0.081	0.223	2.842	2.617	3.326	3.291	0.359	0.641	0.590	---	---
L-12--30	12.90	0.741	0.166	0.080	0.224	2.782	2.573	3.290	3.274	0.357	0.626	0.579	---	---
L-12--31	12.83	0.686	0.155	0.078	0.226	2.625	2.400	3.065	3.091	0.348	0.588	0.537	---	---
L-12--32	12.88	0.736	0.160	0.080	0.218	2.886	2.550	3.274	3.169	0.354	0.649	0.573	---	---

QUESTIONABLE

UNLESS OTHERWISE INDICATED, ALL DATA ARE FOR:

1. SUPERCAVITATING FLOW.
2. BOTH STATIC PRESSURE TAPS OPEN.

## LEGEND

\* ONLY UPSTREAM STATIC PRESSURE TAP UTILIZED

\* ONLY DOWNSTREAM STATIC PRESSURE TAP UTILIZED

PC PARTIALLY CAVITATING

PC(TW) PARTIALLY CAVITATING (TAP WETTED)

FW FULLY WETTED

AT (ALPHAT) (TRUE) ANGLE OF ATTACK, CORRECTED FOR EFFECTS OF IMAGES OF TRAILING VORTICES

AT2 ALPHAT\*\*2

SIGC CAVITATION NUMBER COMPUTED WITH MEASURED CAVITY PRESSURE

SIGV CAVITATION NUMBER COMPUTED WITH CALCULATED VAPOR PRESSURE

CD DRAG COEFFICIENT, CORRECTED FOR EFFECTS OF IMAGES OF TRAILING VORTICES

(D/L) CORRECTED DRAG-TO-LIFT RATIO = CD/CL

CAVLTH CAVITY LENGTH MEASURED FROM MIDCHORD AT CENTROID POSITION, NONDIMENSIONALIZED ON MEAN CHORD  
(OBTAINED FROM PHOTOGRAPHS)



EXPER INVES OF WALL EFFECTS ON SUPERCAVITATING HYDROFOILS OF FINITE SPAN

HYDROFOIL INPUT DATA

TR TT AREA SPAN HAC  
75 83 90.0 15.0 6.03

ZERO READINGS AND TUNNEL TEMP BEFORE AND AFTER

MANOM 1-R 1-R 2-R 2-R 3-R 3-R TT  
0- 0-0 0-0 0-0 100-0 0-0 100-0 82-5  
0- 0-0 0-0 0-0 100-9 0-0 100-0 84-0  
CELL LES/CT(NORMAL/REV) #1=0.20000 #2=0.20000 #3=0.04030  
TWIST= 7200.0 SHAFT DIA.= 1.50IN

\*\*INPUT DATA AS RECORDED\*\*

RUN NO	MANOM	S	#1	S	#2	S	#3	PINP	PCAV
L-14.-01	1034.	-1816.0	R	164.5	R	2125.0	0	229.	53.
L-14.-02+	1034.	-1758.0	R	161.8	R	2100.0	0	229.	51.
L-14.-03	1033.	-1700.0	R	159.8	R	2085.0	0	214.	49.
L-14.-04+	1034.	-1648.0	R	158.2	R	2057.0	0	214.	48.
L-14.-05	1036.	-1582.0	R	156.8	R	2034.0	0	200.	45.
L-14.-06+	1034.	-1528.0	R	155.5	R	1995.0	0	200.	44.
L-14.-07	1035.	-1426.0	R	153.6	R	1925.0	0	182.	41.
L-14.-08+	1036.	-1372.0	R	153.0	R	1880.0	0	181.	40.
L-14.-09	1039.	-1304.0	R	152.0	R	1817.0	0	169.	39.
L-14.-10+	1040.	-1258.0	R	151.2	R	1774.0	0	169.	38.
L-14.-11	1041.	-1194.0	R	150.0	R	1705.0	0	156.	37.
L-14.-12+	1042.	-1140.0	R	149.0	R	1655.0	0	156.	36.
L-14.-13	1043.	-1062.0	R	147.6	R	1565.0	0	141.	32.
L-14.-14+	1043.	-1018.0	R	147.3	R	1506.0	0	141.	31.
L-14.-15	1044.	-962.0	R	146.6	R	1436.0	0	127.	31.
L-14.-16+	1044.	-908.0	R	145.5	R	1394.0	0	127.	30.
L-14.-17	1045.	-892.0	R	145.5	R	1375.0	0	121.	31.
L-14.-18+	1046.	-836.0	R	144.5	R	1304.0	0	121.	30.
L-14.-19	1047.	-834.0	R	144.4	R	1293.0	0	114.	30.
L-14.-20+	1043.	-776.0	R	142.9	R	1221.0	0	114.	30.
L-14.-21	1044.	-792.0	R	143.0	R	1235.0	0	106.	30.
L-14.-22+	1034.	-724.0	R	140.3	R	1145.0	0	106.	30.
L-14.-23	687.	-732.0	R	133.0	R	1100.0	0	110.	32.
L-14.-24+	687.	-694.0	R	132.4	R	1054.0	0	110.	32.

LOAD CELL #1 LIPT (COUNTS) #2 MOMENT ABOUT MIDCHORD (COUNTS)  
#3 DRAG (COUNTS)  
PINP STATIC PRESSURE (MM HG)  
PCAV CAVITY PRESSURE (MM HG)  
RUN NO Q-XXX-YY: Q=FOIL TESTED(S=SMALL, M=MED, L=LARGE)  
XXI=GEOMETRIC ATTACK ANGLE (DEGREES)  
YY=RUN NUMBER, THIS FOIL @ THIS ANGLE

TR ROOM TEMPER (DEG FAHR)  
TT TUNNEL " ( " " )  
AREA HALF-SPAN MODEL PLANFORM AREA (SQ IN)  
SPAN POIL HALF-SPAN (IN)  
HAC MEAN CHORD, MEAS. @ MODEL CENTROID(IN)  
MANOM VELOCITY MANOMETER READING (MM)  
TWIST SHAFT TWIST (DEGREES/IN-LB)  
S LOAD CELL POLARITY(N=NORMAL, R=REVERSE)



EXPER INVES OF WALL EFFECTS ON SUPERCavitating HYDROFOILS OF FINITE SPAN

INPUT DATA CORRECTED FOR ZERO READINGS, SIGNS, AND HYDROSTATIC PRESSURE

RUN NO	HANON	#1	#2	#3	PIN?	PCAV
L-14.-01	1034.	-1816.0	-64.5	-2025.0	222.	53.
L-14.-02	1034.	-1758.0	-61.8	-2000.0	222.	51.
L-14.-03	1033.	-1700.0	-59.7	-1985.0	207.	49.
L-14.-04	1034.	-1648.0	-58.1	-1967.0	207.	48.
L-14.-05	1034.	-1582.0	-56.6	-1934.0	193.	45.
L-14.-06	1034.	-1528.0	-55.3	-1895.0	193.	44.
L-14.-07	1035.	-1426.0	-53.4	-1825.0	175.	41.
L-14.-08	1036.	-1372.0	-52.7	-1780.0	174.	40.
L-14.-09	1039.	-1304.0	-51.7	-1717.0	162.	39.
L-14.-10	1040.	-1258.0	-50.8	-1674.0	162.	38.
L-14.-11	1041.	-1194.0	-49.6	-1605.0	149.	37.
L-14.-12	1042.	-1140.0	-48.6	-1555.0	149.	36.
L-14.-13	1043.	-1062.0	-47.1	-1465.0	134.	32.
L-14.-14	1043.	-1018.0	-46.8	-1406.0	134.	31.
L-14.-15	1044.	-962.0	-46.1	-1336.0	120.	31.
L-14.-16	1044.	-908.0	-44.9	-1294.0	120.	30.
L-14.-17	1045.	-892.0	-44.9	-1275.0	114.	31.
L-14.-18	1044.	-836.0	-43.9	-1204.0	114.	30.
L-14.-19	1047.	-834.0	-43.7	-1193.0	107.	30.
L-14.-20	1043.	-776.0	-42.2	-1121.0	107.	30.
L-14.-21	1044.	-792.0	-42.2	-1135.0	99.	30.
L-14.-22	1034.	-724.0	-39.5	-1045.0	99.	30.
L-14.-23	687.	-732.0	-32.1	-1000.0	103.	32.
L-14.-24	687.	-694.0	-31.5	-954.0	103.	32.





PIPER INVER OF HALL EFFECTS ON SUPERCavitating HYDROFOILS OF FINITE SPAN

••HYDROFOIL DATA REDUCTION••

ROW NO	ALPHA	LIFT-LB	DRAG-LB	NON-INLB	VEL-FPS
L-14.-01	14.03	376.10	81.61	232.20	24.05
L-14.-02	14.03	363.95	80.60	222.34	24.05
L-14.-03	14.03	351.94	80.00	215.00	24.04
L-14.-04	14.03	341.22	79.27	209.10	24.05
L-14.-05	14.03	327.73	77.94	203.92	24.05
L-14.-06	14.03	316.66	76.37	199.10	24.05
L-14.-07	14.03	295.67	73.55	192.11	24.06
L-14.-08	14.03	284.95	71.73	189.81	24.07
L-14.-09	14.03	271.14	69.20	186.07	24.11
L-14.-10	14.03	261.77	67.46	183.05	24.12
L-14.-11	14.02	248.72	64.68	178.59	24.13
L-14.-12	14.02	237.71	62.67	174.85	24.14
L-14.-13	14.02	221.83	59.04	169.67	24.15
L-14.-14	14.02	212.96	56.66	168.45	24.15
L-14.-15	14.02	201.61	53.84	165.79	24.16
L-14.-16	14.02	190.58	52.15	161.69	24.16
L-14.-17	14.02	187.37	51.38	161.55	24.17
L-14.-18	14.02	175.97	48.52	157.81	24.16
L-14.-19	14.02	175.54	48.08	157.30	24.19
L-14.-20	14.02	163.63	45.13	151.76	24.15
L-14.-21	14.02	166.84	45.74	151.98	24.16
L-14.-22	14.02	152.70	42.11	142.12	24.05
L-14.-23	14.02	152.83	40.30	115.70	19.89
L-14.-24	14.02	145.10	38.45	113.40	19.89

LEGEND VEL UPSTREAM VELOCITY (U)



EXPER INVES OF WALL EFFECTS ON SUPERCAVITATING HYDROFOILS OF FINITE SPAN

\*\*HYDROFOIL DATA IN NONDIMENSIONAL FORM (NO CORRECTIONS APPLIED)\*\*

RUN NO	ALPHA	CL	CDUNC	CM	L/D	D/L	RM*10**-6
L-14.-01	14.03	1.0755	0.2288	0.1101	4.7013	0.2127	1.3457
L-14.-02	14.03	1.0408	0.2259	0.1054	4.6075	0.2170	1.3457
L-14.-03	14.03	1.0074	0.2244	0.1021	4.4897	0.2227	1.3451
L-14.-04	14.03	0.9758	0.2221	0.0992	4.3936	0.2276	1.3457
L-14.-05	14.03	0.9372	0.2183	0.0967	4.2935	0.2329	1.3457
L-14.-06	14.03	0.9056	0.2138	0.0944	4.2357	0.2361	1.3457
L-14.-07	14.03	0.8454	0.2055	0.0910	4.1129	0.2431	1.3463
L-14.-08	14.03	0.8134	0.2002	0.0899	4.0635	0.2461	1.3469
L-14.-09	14.03	0.7719	0.1924	0.0878	4.0121	0.2492	1.3487
L-14.-10	14.03	0.7446	0.1873	0.0863	3.9755	0.2515	1.3493
L-14.-11	14.02	0.7068	0.1792	0.0842	3.9440	0.2536	1.3499
L-14.-12	14.02	0.6749	0.1733	0.0823	3.8939	0.2568	1.3505
L-14.-13	14.02	0.6293	0.1629	0.0798	3.8633	0.2588	1.3511
L-14.-14	14.02	0.6041	0.1561	0.0792	3.8690	0.2585	1.3511
L-14.-15	14.02	0.5714	0.1480	0.0779	3.8608	0.2590	1.3517
L-14.-16	14.02	0.5402	0.1432	0.0760	3.7719	0.2651	1.3517
L-14.-17	14.02	0.5306	0.1409	0.0759	3.7656	0.2656	1.3523
L-14.-18	14.02	0.4987	0.1329	0.0742	3.7520	0.2665	1.3517
L-14.-19	14.02	0.4962	0.1313	0.0737	3.7789	0.2646	1.3535
L-14.-20	14.02	0.4642	0.1236	0.0714	3.7568	0.2662	1.3511
L-14.-21	14.02	0.4729	0.1250	0.0714	3.7817	0.2644	1.3517
L-14.-22	14.02	0.4367	0.1158	0.0674	3.7698	0.2653	1.3457
L-14.-23	14.02	0.6394	0.1639	0.0803	3.9016	0.2563	1.1126
L-14.-24	14.02	0.6070	0.1561	0.0787	3.8883	0.2572	1.1126

LEGEND

ALPHA GEOMETRIC ANGLE OF ATTACK CORRECTED FOR SHAFT TWIST

CL LIFT COEFFICIENT, NONDIMENSIONALIZED ON UPSTREAM VELOCITY AND MODEL PLANFORM AREA  
CDUNC CD(UNCORRECTED), THE UNCORRECTED DRAG COEFFICIENT AS COMPUTED FROM MEASURED DRAG, AND NONDIMENSIONALIZED ON UPSTREAM VELOCITY AND MODEL PLANFORM AREA

CM MOMENT COEFFICIENT, NONDIMENSIONALIZED ON UPSTREAM VELOCITY, MODEL PLANFORM AREA, AND MEAN CHORD

L/D LIFT-TO-DRAG RATIO = CL/CDUNC

D/L DRAG-TO-LIFT RATIO = CDUNC/CL

RM REYNOLDS NUMBER, BASED ON MEAN CHORD



ZIPER INVES OF WALL EFFECTS ON SUPERCAVITATING HYDROFOILS OF FINITE SPAN

\*\*PRIOR DATA CORRECTED FOR EFFECTS OF IMAGES OF TRAILING VORTEX SYSTEM\*\*

RUN NO	ALPHAT	CL	CD	CM	(D/L)	SIGW/AT	SIGC/AT	CL/AT	CD/AT2	CM/AT	SIGV	SIGC	CAVLTH	COMMENTS/REMARKS
L-14.-01	15.31	1.076	0.253	0.110	0.235	3.611	3.153	4.026	3.540	0.412	0.965	0.842	----	
L-14.-02+	15.27	1.041	0.248	0.105	0.239	3.620	3.199	3.906	3.498	0.396	0.964	0.852	0.70	
L-14.-03	15.22	1.007	0.245	0.102	0.244	3.350	2.967	3.791	3.475	0.384	0.890	0.788	----	
L-14.-04+	15.19	0.976	0.242	0.099	0.248	3.355	2.991	3.681	3.442	0.374	0.889	0.793	0.80	
L-14.-05	15.14	0.937	0.236	0.097	0.252	3.100	2.792	3.547	3.387	0.366	0.819	0.738	----	
L-14.-06+	15.10	0.906	0.231	0.094	0.255	3.107	2.818	3.436	3.322	0.358	0.819	0.743	0.83	
L-14.-07	15.03	0.845	0.220	0.091	0.261	2.777	2.545	3.223	3.202	0.347	0.728	0.668	----	
L-14.-08+	14.99	0.813	0.214	0.090	0.263	2.761	2.549	3.109	3.124	0.343	0.722	0.667	0.92	
L-14.-09	14.94	0.772	0.205	0.088	0.265	2.534	2.342	2.960	3.011	0.337	0.661	0.611	----	
L-14.-10+	14.91	0.745	0.199	0.086	0.267	2.536	2.364	2.862	2.936	0.332	0.660	0.615	0.95	
L-14.-11	14.86	0.707	0.190	0.084	0.268	2.292	2.140	2.725	2.817	0.324	0.595	0.555	----	
L-14.-12+	14.82	0.675	0.183	0.082	0.271	2.295	2.163	2.609	2.730	0.318	0.594	0.560	1.10	
L-14.-13	14.77	0.629	0.171	0.080	0.272	2.013	1.958	2.441	2.575	0.310	0.519	0.505	----	
L-14.-14+	14.74	0.604	0.164	0.079	0.271	2.016	1.982	2.348	2.473	0.308	0.519	0.510	1.43	
L-14.-15	14.70	0.571	0.155	0.078	0.271	1.749	1.716	2.227	2.351	0.304	0.449	0.440	----	
L-14.-16+	14.66	0.540	0.149	0.076	0.276	1.752	1.740	2.111	2.279	0.297	0.448	0.445	1.80	
L-14.-17	14.65	0.531	0.147	0.076	0.277	1.635	1.604	2.075	2.244	0.297	0.418	0.410	1.88	
L-14.-18+	14.61	0.499	0.138	0.074	0.277	1.640	1.629	1.955	2.123	0.291	0.418	0.416	2.20	
L-14.-19	14.61	0.496	0.136	0.074	0.275	1.499	1.490	1.946	2.098	0.289	0.382	0.380	----	
L-14.-20+	14.57	0.464	0.128	0.071	0.276	1.508	1.500	1.825	1.979	0.281	0.383	0.381	2.95	
L-14.-21	14.58	0.473	0.130	0.071	0.274	1.349	1.342	1.858	2.002	0.281	0.343	0.342	----	
L-14.-22+	14.54	0.437	0.120	0.067	0.274	1.364	1.358	1.721	1.861	0.266	0.346	0.345	4.50	
L-14.-23	14.77	0.639	0.172	0.080	0.270	2.075	2.012	2.480	2.592	0.311	0.535	0.519	----	
L-14.-24+	14.74	0.607	0.164	0.079	0.270	2.078	2.017	2.360	2.476	0.306	0.535	0.519	----	

UNLESS OTHERWISE INDICATED, ALL DATA ARE FOR:

1. SUPERCAVITATING FLOW.
2. BOTH STATIC PRESSURE TAPS OPEN.

LEGEND

\* ONLY UPSTREAM STATIC PRESSURE TAP UTILIZED

\* ONLY DNSTREAM STATIC PRESSURE TAP UTILIZED

PC PARTIALLY CAVITATING

PC(TW) PARTIALLY CAVITATING (TAP WETTED)

FW FULLY WETTED

AT (ALPHAT) (TRUE) ANGLE OF ATTACK, CORRECTED FOR EFFECTS OF IMAGES OF TRAILING VORTICES

AT2 ALPHAT\*\*2

SIGC CAVITATION NUMBER COMPUTED WITH MEASURED CAVITY PRESSURE

SIGV CAVITATION NUMBER COMPUTED WITH CALCULATED VAPOR PRESSURE

CD DRAG COEFFICIENT, CORRECTED FOR EFFECTS OF IMAGES OF TRAILING VORTICES

(D/L) CORRECTED DRAG-TO-LIFT RATIO = CD/CL

CAVLTH CAVITY LENGTH MEASURED FROM MIDCHORD AT CENTROID POSITION, NONDIMENSIONALIZED ON MEAN CHORD (OBTAINED FROM PHOTOGRAPHS)

QUESTIONABLE



EXPER INVES OF WALL EFFECTS ON SUPERCAVITATING HYDROFOILS OF FINITE SPAN

HYDROFOIL INPUT DATA

TR TT AREA SPAN MAC  
75 89 90.0 15.0 6.03

ZERO READINGS AND TUNNEL TEMP BEFORE AND AFTER

MANOH 1-M 1-R 2-W 2-R 3-W 3-R TT  
0. 0.0 0.0 0.0 100.0 0.0 100.0 88.0  
0. 0.0 0.0 0.0 100.0 0.0 107.0 90.0

CELL LES/CT(NORMAL/REV) #1=0.20000 #2=0.20000 #3=0.04030

TWIST= 7200.0 SHAFT DIA.= 1.50IN

\*\*INPUT DATA AS RECORDED\*\*

RUN NO	MANOH	S	#1	S	#2	S	#3	PINP	PCAV	PW	PC
L-16.-01	463.	R	-888.0	R	154.0	R	1103.0	764.	----	PW	
L-16.-02	696.	R	-1316.0	R	179.0	R	1598.0	733.	----	PW	
L-16.-03	972.	R	-1790.0	R	208.0	R	2150.0	700.	----	PW	
L-16.-04	964.	R	-1936.0	R	198.0	R	2335.0	311.	----	PC(TW)	
L-16.-05	967.	R	-1930.0	R	189.5	R	2395.0	296.	117.	PC	
L-16.-06	966.	R	-1900.0	R	179.0	R	2415.0	277.	90.		
L-16.-07+	963.	R	-1870.0	R	177.5	R	2420.0	277.	90.		
L-16.-08	961.	R	-1830.0	R	170.8	R	2445.0	255.	81.		
L-16.-09+	962.	R	-1794.0	R	167.8	R	2425.0	255.	75.		
L-16.-10	963.	R	-1710.0	R	163.0	R	2385.0	233.	68.		
L-16.-11+	962.	R	-1672.0	R	160.0	R	2365.0	233.	64.		
L-16.-12	963.	R	-1602.0	R	158.0	R	2310.0	214.	60.		
L-16.-13+	964.	R	-1550.0	R	156.0	R	2290.0	214.	57.		
L-16.-14	964.	R	-1478.0	R	154.0	R	2233.0	197.	52.		
L-16.-15+	970.	R	-1418.0	R	153.0	R	2190.0	197.	50.		
L-16.-16	971.	R	-1314.0	R	151.8	R	2075.0	178.	47.		
L-16.-17+	971.	R	-1260.0	R	150.9	R	2015.0	178.	46.		
L-16.-18	973.	R	-1180.0	R	149.2	R	1930.0	161.	44.		
L-16.-19+	976.	R	-1124.0	R	148.3	R	1855.0	161.	42.		
L-16.-20	974.	R	-1062.0	R	147.9	R	1772.0	147.	40.		
L-16.-21+	973.	R	-1012.0	R	147.4	R	1708.0	147.	39.		
L-16.-22	976.	R	-978.0	R	146.5	R	1655.0	135.	38.		
L-16.-23+	977.	R	-926.0	R	146.0	R	1597.0	135.	38.		
L-16.-24	981.	R	-900.0	R	145.6	R	1555.0	126.	38.		
L-16.-25+	979.	R	-850.0	R	144.5	R	1480.0	125.	38.		
L-16.-26	976.	R	-842.0	R	144.1	R	1471.0	114.	38.		
L-16.-27+	977.	R	-842.0	R	144.5	R	1476.0	114.	38.		
L-16.-28	977.	R	-1350.0	R	152.5	R	2115.0	182.	48.		
L-16.-29	708.	R	-954.0	R	137.5	R	1538.0	139.	45.		
L-16.-30	363.	R	-554.0	R	121.5	R	925.0	102.	42.		

TR ROOM TEMPER (DEG FAHR)  
TT TUNNEL " ( " )

AREA HALF-SPAN MODEL PLANFORM AREA (SQ IN)

SPAN FOIL HALF-SPAN (IN)

HAC BEAN CHORD, BEAS. @ MODEL CENTROID(IN)

MANOH VELOCITY MANOMETER READING (MM)

TWIST SHAFT TWIST (DEGREES/IN-LB)

S LOAD CELL POLARITY(N=NORMAL, R=REVERSE)

LOAD CELL #1 LIFT (COUNTS)

#2 MOMENT ABOUT MIDCHORD (COUNTS)

#3 DRAG (COUNTS)

PINP STATIC PRESSURE (MM HG)

PCAV CAVITY PRESSURE (MM HG)

RUN NO Q-XXX-YY: Q=FOIL TESTED(S=SMALL,M=MED,L=LARGE)

XX=GEOMETRIC ATTACK ANGLE (DEGREES)

YY=RUN NUMBER, THIS FOIL @ THIS ANGLE





EXPER INVES OF WALL EFFECTS ON SUPERCAVITATING HYDROFOILS OF FINITE SPAN

INPUT DATA CORRECTED FOR ZERO READINGS, SIGNS, AND HYDROSTATIC PRESSURE

RUN NO	HANON	#1	#2	#3	PINF	PCAV
L-16.-01	463.	-888.0	-54.0	-1003.0	757.	----
L-16.-02	696.	-1316.0	-79.0	-1497.8	726.	----
L-16.-03	972.	-1790.0	-108.0	-2049.5	693.	----
L-16.-04	964.	-1936.0	-98.0	-2234.3	304.	----
L-16.-05	967.	-1930.0	-89.5	-2294.0	289.	117.
L-16.-06	966.	-1900.0	-79.0	-2313.8	276.	90.
L-16.-07	963.	-1870.0	-77.5	-2318.6	270.	90.
L-16.-08	961.	-1830.0	-70.8	-2343.3	248.	81.
L-16.-09	962.	-1794.0	-67.8	-2323.1	248.	75.
L-16.-10	963.	-1710.0	-63.0	-2282.8	226.	68.
L-16.-11	962.	-1672.0	-60.0	-2262.6	226.	64.
L-16.-12	963.	-1602.0	-58.0	-2207.3	207.	60.
L-16.-13	964.	-1550.0	-56.0	-2187.1	207.	57.
L-16.-14	964.	-1478.0	-54.0	-2129.9	190.	52.
L-16.-15	970.	-1418.0	-53.0	-2086.6	190.	50.
L-16.-16	971.	-1314.0	-51.8	-1971.4	171.	47.
L-16.-17	971.	-1260.0	-50.9	-1911.1	171.	46.
L-16.-18	973.	-1180.0	-49.2	-1825.9	154.	44.
L-16.-19	976.	-1124.0	-48.3	-1750.7	154.	42.
L-16.-20	974.	-1062.0	-47.9	-1667.4	140.	40.
L-16.-21	973.	-1012.0	-47.4	-1603.2	140.	39.
L-16.-22	976.	-978.0	-46.5	-1549.9	128.	38.
L-16.-23	977.	-926.0	-46.0	-1491.7	128.	38.
L-16.-24	981.	-900.0	-45.6	-1449.4	119.	38.
L-16.-25	979.	-850.0	-44.5	-1374.2	118.	38.
L-16.-26	976.	-842.0	-44.1	-1365.0	107.	38.
L-16.-27	977.	-842.0	-44.5	-1369.7	107.	38.
L-16.-28	977.	-1350.2	-52.5	-2008.5	175.	48.
L-16.-29	708.	-954.0	-37.5	-1431.2	132.	45.
L-16.-30	363.	-554.0	-21.5	-818.0	95.	42.



EXPER INVES OF WALL EFFECTS ON SUPERCAVITATING HYDROFOILS OF FINITE SPAN

\*\*HYDROFOIL DATA REDUCTION\*\*

RUX NO	ALPHA	LIFT-LB	DRAG-LB	MOM-INLB	VEL-FPS
L-16.-01	16.03	188.40	40.42	194.40	16.56
L-16.-02	16.04	279.00	60.36	284.40	20.02
L-16.-03	16.05	375.60	82.60	388.80	23.38
L-16.-04	16.05	406.80	90.04	352.80	23.29
L-16.-05	16.04	403.90	92.45	322.20	23.32
L-16.-06	16.04	395.80	93.25	284.40	23.31
L-16.-07	16.04	389.50	93.44	279.00	23.28
L-16.-08	16.04	380.16	94.44	254.88	23.26
L-16.-09	16.03	372.36	93.62	248.08	23.27
L-16.-10	16.03	359.60	92.00	226.80	23.28
L-16.-11	16.03	346.40	91.18	216.00	23.27
L-16.-12	16.03	332.00	88.96	208.80	23.28
L-16.-13	16.03	321.20	88.14	201.60	23.29
L-16.-14	16.03	306.40	85.83	194.40	23.29
L-16.-15	16.03	294.20	84.09	190.80	23.36
L-16.-16	16.03	273.16	79.45	186.48	23.37
L-16.-17	16.03	262.18	77.02	183.24	23.37
L-16.-18	16.02	245.84	73.58	177.12	23.39
L-16.-19	16.02	234.46	70.55	173.88	23.42
L-16.-20	16.02	221.98	67.20	172.44	23.40
L-16.-21	16.02	211.88	64.61	170.64	23.39
L-16.-22	16.02	204.90	62.46	167.40	23.42
L-16.-23	16.02	194.40	60.12	165.60	23.44
L-16.-24	16.02	189.12	58.41	164.16	23.48
L-16.-25	16.02	178.90	55.38	160.20	23.46
L-16.-26	16.02	177.22	55.01	158.76	23.42
L-16.-27	16.02	177.30	55.20	160.20	23.44
L-16.-28	16.03	280.50	80.94	189.00	23.44
L-16.-29	16.02	198.30	57.68	135.00	20.17
L-16.-30	16.01	115.10	32.97	77.40	14.79

LEGEND VEL UPSTREAM VELOCITY (U)



EXPER INVES OF WALL EFFECTS ON SUPERCAVITATING HYDROFOILS OF FINITE SPAN

\*\*HYDROFOIL DATA IN NONDIMENSIONAL FORM (NO CORRECTIONS APPLIED)\*\*

RUN NO	ALPHA	CL	CDUNC	CM	L/D	D/L	RE*10**-6
L-16.-01	16.03	1.1380	0.2393	0.1947	4.7547	0.2103	0.9787
L-16.-02	16.04	1.1532	0.2448	0.1950	4.7107	0.2123	1.1831
L-16.-03	16.05	1.1499	0.2456	0.1953	4.6816	0.2136	1.3820
L-16.-04	16.05	1.2418	0.2703	0.1786	4.5945	0.2176	1.3766
L-16.-05	16.04	1.2294	0.2768	0.1626	4.4412	0.2252	1.3786
L-16.-06	16.04	1.2059	0.2795	0.1437	4.3143	0.2318	1.3780
L-16.-07	16.04	1.1902	0.2809	0.1414	4.2366	0.2360	1.3760
L-16.-08	16.04	1.1639	0.2845	0.1294	4.0905	0.2445	1.3747
L-16.-09	16.03	1.1389	0.2818	0.1238	4.0421	0.2474	1.3753
L-16.-10	16.03	1.0835	0.2765	0.1149	3.9183	0.2552	1.3760
L-16.-11	16.03	1.0595	0.2743	0.1096	3.8625	0.2589	1.3753
L-16.-12	16.03	1.0145	0.2672	0.1058	3.7962	0.2634	1.3760
L-16.-13	16.03	0.9805	0.2645	0.1021	3.7073	0.2697	1.3766
L-16.-14	16.03	0.9353	0.2574	0.0984	3.6333	0.2752	1.3766
L-16.-15	16.03	0.8929	0.2506	0.0960	3.5626	0.2807	1.3806
L-16.-16	16.03	0.8283	0.2363	0.0938	3.5049	0.2853	1.3813
L-16.-17	16.03	0.7950	0.2290	0.0921	3.4722	0.2980	1.3813
L-16.-18	16.02	0.7440	0.2141	0.0889	3.4111	0.2932	1.3826
L-16.-19	16.02	0.7075	0.2083	0.0870	3.3963	0.2944	1.3846
L-16.-20	16.02	0.6712	0.1986	0.0865	3.3796	0.2959	1.3833
L-16.-21	16.02	0.6412	0.1909	0.0856	3.3582	0.2978	1.3826
L-16.-22	16.02	0.6183	0.1839	0.0838	3.3621	0.2974	1.3846
L-16.-23	16.02	0.5861	0.1767	0.0828	3.3176	0.3014	1.3853
L-16.-24	16.02	0.5680	0.1709	0.0818	3.3244	0.3008	1.3879
L-16.-25	16.02	0.5383	0.1621	0.0799	3.3217	0.3011	1.3866
L-16.-26	16.02	0.5348	0.1614	0.0795	3.3131	0.3018	1.3846
L-16.-27	16.02	0.5345	0.1618	0.0801	3.3029	0.3028	1.3853
L-16.-28	16.03	0.8457	0.2394	0.0945	3.5317	0.2831	1.3853
L-16.-29	16.02	0.8067	0.2300	0.0911	3.5079	0.2851	1.1925
L-16.-30	16.01	0.8719	0.2448	0.0972	3.5613	0.2808	0.8739

LEGEND

ALPHA GEOMETRIC ANGLE OF ATTACK CORRECTED FOR SHAFT THIST

CL LIFT COEFFICIENT, NONDIMENSIONALIZED ON UPSTREAM VELOCITY AND MODEL PLANFORM AREA

CDUNC CD(UNCORRECTED), THE UNCORRECTED DRAG COEFFICIENT AS COMPUTED FROM MEASURED DRAG, AND NONDIMENSIONALIZED ON UPSTREAM VELOCITY AND MODEL PLANFORM AREA

CM MOMENT COEFFICIENT, NONDIMENSIONALIZED ON UPSTREAM VELOCITY, MODEL PLANFORM AREA, AND MEAN CHORD

L/D LIFT-TO-DRAG RATIO = CL/CDUNC

D/L DRAG-TO-LIFT RATIO = CDUNC/CL

RN REYNOLDS NUMBER, BASED ON MEAN CHORD



EXPER INVES OF WALL EFFECTS ON SUPERCAVITATING HYDROFOILS OF FINITE SPAN

\*\*PRIOR DATA CORRECTED FOR EFFECTS OF IMAGES OF TRAILING VORTEX SYSTEM\*\*

RUN NO	ALPHAT	CL	CD	CH	(D/L)	SIGV/AT	SIGC/AT	CL/AT	CD/AT2	CM/AT	SIGV	SIGC	CAVLTH	COMMENTS/REMARKS
L-16.-01	17.38	1.138	0.266	0.195	0.234	-----	-----	3.752	2.894	0.642	-----	-----	----	PV
L-16.-02	17.41	1.153	0.272	0.195	0.236	-----	-----	3.796	2.951	0.642	-----	-----	----	PV
L-16.-03	17.43	1.150	0.273	0.195	0.237	-----	-----	3.783	2.954	0.643	-----	-----	----	PV
L-16.-04	17.52	1.242	0.302	0.179	0.243	-----	-----	4.061	3.231	0.584	-----	-----	----	PC (TW)
L-16.-05	17.50	1.229	0.308	0.163	0.251	4.423	2.987	4.024	3.302	0.532	1.351	0.913	----	PC
L-16.-06	17.47	1.206	0.310	0.144	0.257	4.120	3.135	3.555	3.330	0.471	1.251	0.956	----	
L-16.-07+	17.45	1.190	0.310	0.141	0.261	4.104	3.148	3.908	3.345	0.464	1.255	0.959	0.60	
L-16.-08	17.42	1.164	0.313	0.129	0.269	3.749	2.932	3.829	3.383	0.426	1.139	0.891	----	
L-16.-09+	17.38	1.139	0.309	0.124	0.271	3.750	3.040	3.754	3.352	0.408	1.138	0.922	0.69	
L-16.-10	17.32	1.084	0.301	0.115	0.278	3.373	2.785	3.585	3.293	0.380	1.019	0.842	----	
L-16.-11+	17.29	1.059	0.298	0.110	0.281	3.381	2.863	3.512	3.269	0.363	1.020	0.864	0.85	
L-16.-12	17.23	1.014	0.289	0.106	0.284	3.051	2.604	3.373	3.190	0.352	0.918	0.783	----	
L-16.-13+	17.19	0.981	0.284	0.102	0.290	3.054	2.661	3.268	3.159	0.340	0.916	0.798	0.86	
L-16.-14	17.14	0.935	0.276	0.098	0.295	2.760	2.456	3.127	3.080	0.329	0.826	0.735	----	
L-16.-15+	17.09	0.893	0.267	0.096	0.299	2.751	2.484	2.994	3.004	0.322	0.820	0.741	0.82	
L-16.-16	17.01	0.828	0.251	0.094	0.302	2.422	2.209	2.790	2.843	0.316	0.719	0.656	----	
L-16.-17+	16.97	0.795	0.242	0.092	0.304	2.426	2.232	2.684	2.760	0.311	0.719	0.661	0.92	
L-16.-18	16.91	0.744	0.230	0.089	0.309	2.126	1.968	2.521	2.636	0.301	0.627	0.581	----	
L-16.-19+	16.86	0.708	0.219	0.087	0.309	2.124	2.003	2.404	2.525	0.296	0.625	0.590	1.40	
L-16.-20	16.82	0.671	0.208	0.086	0.310	1.881	1.797	2.286	2.413	0.295	0.552	0.528	----	
L-16.-21+	16.78	0.641	0.199	0.086	0.311	1.885	1.821	2.189	2.324	0.292	0.552	0.533	1.71	
L-16.-22	16.76	0.618	0.192	0.084	0.310	1.666	1.621	2.114	2.243	0.286	0.487	0.474	----	
L-16.-23+	16.72	0.586	0.184	0.083	0.314	1.667	1.623	2.009	2.158	0.284	0.486	0.474	2.17	
L-16.-24	16.70	0.568	0.178	0.082	0.313	1.500	1.457	1.949	2.091	0.281	0.437	0.425	----	
L-16.-25+	16.66	0.538	0.168	0.080	0.312	1.487	1.445	1.851	1.988	0.275	0.432	0.420	2.94	
L-16.-26	16.66	0.535	0.167	0.079	0.313	1.291	1.251	1.840	1.980	0.273	0.375	0.364	----	
L-16.-27+	16.66	0.535	0.168	0.080	0.314	1.288	1.250	1.839	1.985	0.276	0.375	0.363	2.98	
L-16.-28	17.03	0.846	0.254	0.094	0.301	2.459	2.247	2.845	2.878	0.318	0.731	0.668	----	
L-16.-29	16.98	0.607	0.243	0.091	0.302	2.300	2.085	2.723	2.773	0.307	0.681	0.618	----	
L-16.-30	17.04	0.872	0.261	0.097	0.299	2.621	2.360	2.931	2.944	0.327	0.780	0.702	----	

UNLESS OTHERWISE INDICATED, ALL DATA ARE FOR:

1. SUPERCAVITATING FLOW.
2. BOTH STATIC PRESSURE TAPS OPEN.

LEGEND

- \* ONLY UPSTREAM STATIC PRESSURE TAP UTILIZED
- \* ONLY DNSTREAM STATIC PRESSURE TAP UTILIZED

PC PARTIALLY CAVITATING

PC (TW) PARTIALLY CAVITATING (TAP WETTED)

PV FULLY WETTED

AT (ALPHAT) (TRUE) ANGLE OF ATTACK, CORRECTED FOR EFFECTS OF IMAGES OF TRAILING VORTICES

AT2 ALPHAT\*\*2

SIGC CAVITATION NUMBER COMPUTED WITH MEASURED CAVITY PRESSURE

SIGV CAVITATION NUMBER COMPUTED WITH CALCULATED VAPOR PRESSURE

CD DRAG COEFFICIENT, CORRECTED FOR EFFECTS OF IMAGES OF TRAILING VORTICES

(D/L) CORRECTED DRAG-TO-LIFT RATIO = CD/CL

CAVLTH CAVITY LENGTH MEASURED FROM MIDCHORD AT CENTROID POSITION, NONDIMENSIONALIZED ON MEAN CHORD (OBTAINED FROM PHOTOGRAPHS)





EXPER INVES OF WALL EFFECTS ON SUPERCAVITATING HYDROFOILS OF FINITE SPAN

HYDROFOIL INPUT DATA

TR TT AREA SPAN MAC  
76 84 90.0 15.0 6.03

ZERO READING AND TUNNEL TEMP BEFORE AND AFTER

MANOM 1-M 1-R 2-M 2-R 3-M 3-R TT  
0. 0.0 0.0 0.0 100.0 0.0 100.0 83.5  
0. 0.0 0.0 0.0 100.5 0.0 109.0 85.0

CELL LBS/CY(NORMAL/REV) #1=0.20000 #2=0.20000 #3=0.04030

TWIST= 7200.0 SHAFT DIA.= 1.50IN

\*\*INPUT DATA AS RECORDED\*\*

RUN NO	MANOM	S	#1	S	#2	S	#3	PINP	PCAV
L-18--01	1154.		-2054.0	R	177.3	R	3275.0	285.	84.
L-18--02+	1154.		-2020.0	R	174.5	R	3240.0	284.	80.
L-18--03	1152.		-1990.0	R	174.2	R	3210.0	271.	76.
L-18--04+	1151.		-1942.0	R	172.0	R	3175.0	272.	72.
L-18--05	1150.		-1916.0	R	171.2	R	3150.0	258.	67.
L-18--06+	1148.		-1870.0	R	169.0	R	3130.0	258.	65.
L-18--07	1143.		-1825.0	R	167.5	R	3070.0	242.	58.
L-18--08+	1139.		-1790.0	R	167.2	R	3030.0	242.	57.
L-18--09	971.		-1585.0	R	158.5	R	2680.0	216.	54.
L-18--10+	971.		-1536.0	R	158.0	R	2625.0	215.	53.
L-18--11	971.		-1504.0	R	156.3	R	2605.0	203.	51.
L-18--12+	971.		-1464.0	R	155.8	R	2540.0	203.	48.
L-18--13	969.		-1376.0	R	155.3	R	2450.0	185.	44.
L-18--14+	972.		-1324.0	R	153.6	R	2390.0	185.	45.
L-18--15	969.		-1284.0	R	152.5	R	2330.0	171.	43.
L-18--16+	972.		-1220.0	R	151.5	R	2255.0	171.	41.
L-18--17	972.		-1200.0	R	151.3	R	2225.0	160.	40.
L-18--18+	973.		-1142.0	R	151.0	R	2135.0	159.	37.
L-18--19	973.		-1124.0	R	150.8	R	2112.0	150.	32.
L-18--20+	972.		-1084.0	R	150.3	R	2035.0	150.	34.
L-18--21	972.		-1030.0	R	150.2	R	2027.0	142.	35.
L-18--22+	973.		-1036.0	R	150.2	R	1960.0	142.	33.
L-18--23	972.		-1016.0	R	150.0	R	1928.0	133.	33.
L-18--24+	976.		-966.0	R	149.5	R	1850.0	133.	33.
L-18--25	976.		-984.0	R	149.5	R	1873.0	126.	33.
L-18--26+	958.		-884.0	R	147.0	R	1708.0	127.	33.

LOAD CELL #1 LIPT (COUNTS) #2 MOMENT ABOUT MIDCHORD (COUNTS) #3 DRAG (COUNTS)  
PINP STATIC PRESSURE (MM HG) PCAV CAVITY PRESSURE (MM HG)  
RUN NO Q-XXX-YY: Q=FOIL TESTED (S=SMALL, M=MED, L=LARGE)  
XXX=GEOMETRIC ATTACK ANGLE (DEGREES)  
YY=RUN NUMBER, THIS FOIL @ THIS ANGLE

TR ROOM TEMPER (DEG FAHR)  
TT TUNNEL " ( " " )  
AREA HALF-SPAN MODEL PLANFORM AREA (SQ IN)  
SPAN FOIL HALF-SPAN (IN)  
MAC MEAN CHORD, MEAS. @ MODEL CENTROID (IN)  
MANOM VELOCITY MANOMETER READING (MM)  
TWIST SHAFT TWIST (DEGREES/IN-LB)  
S LOAD CELL POLARITY (M=NORMAL, R=REVERSE)



EXPER INVES OF WALL EFFECTS ON SUPERCavitating HYDROFOILS OF FINITE SPAN

INPUT DATA CORRECTED FOR ZERO READINGS, SIGNS, AND HYDROSTATIC PRESSURE

RUN NO	MANOM	#1	#2	#3	PINP	PCAV
L-18.-01	1154.	-2054.0	-77.3	-3175.0	278.	84.
L-18.-02	1154.	-2020.0	-74.5	-3139.6	277.	80.
L-18.-03	1152.	-1990.0	-74.2	-3109.3	264.	76.
L-18.-04	1151.	-1942.0	-71.9	-3073.9	265.	72.
L-18.-05	1150.	-1916.0	-71.1	-3048.6	251.	67.
L-18.-06	1148.	-1870.0	-68.9	-3028.2	251.	65.
L-18.-07	1143.	-1825.0	-67.4	-2967.8	235.	58.
L-18.-08	1139.	-1790.0	-67.1	-2927.5	235.	57.
L-18.-09	971.	-1585.0	-58.3	-2577.1	209.	54.
L-18.-10	971.	-1536.0	-57.8	-2521.8	208.	53.
L-18.-11	971.	-1504.0	-56.1	-2501.4	196.	51.
L-18.-12	971.	-1460.0	-55.6	-2436.0	196.	48.
L-18.-13	969.	-1376.0	-55.1	-2345.7	178.	44.
L-18.-14	972.	-1324.0	-53.3	-2285.3	178.	45.
L-18.-15	969.	-1284.0	-52.2	-2225.0	164.	43.
L-18.-16	972.	-1220.0	-51.2	-2149.6	164.	41.
L-18.-17	972.	-1200.0	-51.0	-2119.2	153.	40.
L-18.-18	973.	-1142.0	-50.7	-2028.9	152.	37.
L-18.-19	973.	-1124.0	-50.4	-2005.5	143.	32.
L-18.-20	972.	-1084.0	-49.9	-1928.2	143.	34.
L-18.-21	972.	-1080.0	-49.8	-1919.8	135.	35.
L-18.-22	973.	-1036.0	-49.8	-1852.4	135.	33.
L-18.-23	972.	-1016.0	-49.6	-1820.1	126.	33.
L-18.-24	976.	-966.0	-49.0	-1741.7	126.	33.
L-18.-25	976.	-984.0	-49.0	-1764.4	119.	33.
L-18.-26	958.	-884.0	-46.5	-1599.0	120.	33.



EXPER INVES OF WALL EFFECTS ON SUPERCavitating HYDROFOILS OF FINITE SPAN

\*\*HYDROFOIL DATA REDUCTION\*\*

RUN NO	ALPHA	LIFT-LB	DRAG-LB	NON-IMLB	VEL-EPS
L-18.-01	18.04	426.26	127.95	278.28	25.31
L-18.-02	18.04	418.90	126.53	268.13	25.31
L-18.-03	18.04	412.83	125.30	266.98	25.29
L-18.-04	18.04	402.79	123.88	258.98	25.28
L-18.-05	18.04	397.42	122.86	256.03	25.27
L-18.-06	18.03	387.78	122.04	248.04	25.25
L-18.-07	18.03	378.48	119.60	242.57	25.20
L-18.-08	18.03	371.41	117.98	241.42	25.16
L-18.-09	18.03	328.67	103.86	210.02	23.36
L-18.-10	18.03	318.76	101.63	208.15	23.36
L-18.-11	18.03	312.02	100.81	201.96	23.36
L-18.-12	18.03	303.92	98.17	200.09	23.36
L-18.-13	18.03	286.21	94.53	198.22	23.33
L-18.-14	18.03	275.47	92.10	192.02	23.37
L-18.-15	18.03	267.24	89.67	187.99	23.33
L-18.-16	18.03	254.24	86.63	184.32	23.37
L-18.-17	18.03	250.20	85.41	183.53	23.37
L-18.-18	18.03	238.53	81.76	182.38	23.33
L-18.-19	18.03	234.89	80.82	181.58	23.38
L-18.-20	18.02	226.78	77.70	179.71	23.37
L-18.-21	18.02	225.96	77.37	179.28	23.37
L-18.-22	18.02	217.16	74.65	179.21	23.38
L-18.-23	18.02	213.11	73.35	178.42	23.37
L-18.-24	18.02	203.01	70.19	176.54	23.41
L-18.-25	18.02	206.60	71.19	176.47	23.41
L-18.-26	18.02	186.10	64.44	167.40	23.21

LEGEND VEL UPSTREAM VELOCITY (U)



EXPERIMENTS OF WALL EFFECTS ON SUPERCavitating HYDROFOILS OF FINITE SPAN

\*\*HYDROFOIL DATA IN NONDIMENSIONAL FORM (NO CORRECTIONS APPLIED)\*\*

RUN NO	ALPHA	CL	CDUNC	CM	L/D	D/L	RE*10**6
L-18.-01	18.04	1.1011	0.3260	0.1192	3.3780	0.2960	1.4298
L-18.-02	18.04	1.0821	0.3223	0.1149	3.3575	0.2978	1.4298
L-18.-03	18.04	1.0682	0.3197	0.1146	3.3416	0.2993	1.4286
L-18.-04	18.04	1.0430	0.3162	0.1112	3.2983	0.3032	1.4280
L-18.-05	18.04	1.0300	0.3138	0.1100	3.2819	0.3047	1.4275
L-18.-06	18.03	1.0066	0.3122	0.1068	3.2240	0.3102	1.4263
L-18.-07	18.03	0.9864	0.3072	0.1048	3.2114	0.3114	1.4234
L-18.-08	18.03	0.9712	0.3039	0.1047	3.1954	0.3129	1.4211
L-18.-09	18.03	0.9970	0.3104	0.1057	3.2116	0.3114	1.3194
L-18.-10	18.03	0.9670	0.3037	0.1047	3.1842	0.3140	1.3194
L-18.-11	18.03	0.9465	0.3012	0.1016	3.1426	0.3182	1.3194
L-18.-12	18.03	0.9219	0.2932	0.1007	3.1444	0.3180	1.3194
L-18.-13	13.03	0.8699	0.2827	0.0999	3.0771	0.3250	1.3181
L-18.-14	18.03	0.8348	0.2745	0.0965	3.0413	0.3288	1.3200
L-18.-15	18.03	0.8122	0.2679	0.0948	3.0317	0.3298	1.3181
L-18.-16	18.03	0.7705	0.2579	0.0926	2.9873	0.3348	1.3200
L-18.-17	18.03	0.7582	0.2542	0.0922	2.9827	0.3353	1.3200
L-18.-18	18.03	0.7222	0.2429	0.0916	2.9727	0.3364	1.3207
L-18.-19	18.03	0.7112	0.2401	0.0912	2.9620	0.3376	1.3207
L-18.-20	16.02	0.6873	0.2309	0.0903	2.9768	0.3359	1.3200
L-18.-21	18.02	0.6848	0.2299	0.0901	2.9792	0.3357	1.3200
L-18.-22	18.02	0.6575	0.2214	0.0900	2.9694	0.3368	1.3207
L-18.-23	18.02	0.6459	0.2177	0.0897	2.9670	0.3370	1.3200
L-18.-24	18.02	0.6129	0.2073	0.0884	2.9565	0.3382	1.3226
L-18.-25	18.02	0.6237	0.2101	0.0884	2.9694	0.3368	1.3226
L-18.-26	18.02	0.5717	0.1933	0.0853	2.9569	0.3382	1.3111

LEGEND

ALPHA GEOMETRIC ANGLE OF ATTACK CORRECTED FOR SHAFT TWIST

CL LIFT COEFFICIENT, NONDIMENSIONALIZED ON UPSTREAM VELOCITY AND MODEL PLANFORM AREA

CDUNC CD(UNCORRECTED), THE UNCORRECTED DRAG COEFFICIENT AS COMPUTED FROM MEASURED DRAG, AND NONDIMENSIONALIZED

ON UPSTREAM VELOCITY AND MODEL PLANFORM AREA

CM MOMENT COEFFICIENT, NONDIMENSIONALIZED ON UPSTREAM VELOCITY, MODEL PLANFORM AREA, AND MEAN CHORD

L/D LIFT-TO-DRAG RATIO = CL/CDUNC

D/L DRAG-TO-LIFT RATIO = CDUNC/CL

RE REYNOLDS NUMBER, BASED ON MEAN CHORD





EXPER INVES OF WALL EFFECTS ON SUPERCAVITATING HYDROFOILS OF FINITE SPAN

\*\*PRIOR DATA CORRECTED FOR EFFECTS OF IMAGES OF TRAILING VORTEX SYSTEM\*\*

BUN NO	ALPHAT	CL	CD	CK	(D/L)	SIGV/AT	SIGC/AT	CL/AT	CD/AT2	CM/AT	SIGV	SIGC	CAVLTH	COMMENTS/REMARKS
L-18.-01	19.34	1.101	0.351	0.119	0.319	3.314	2.587	3.261	3.080	0.353	1.119	0.873	---	
L-18.-02+	19.32	1.082	0.347	0.115	0.320	3.304	2.630	3.209	3.048	0.341	1.114	0.887	0.92	
L-18.-03	19.30	1.068	0.343	0.115	0.321	3.138	2.516	3.170	3.024	0.340	1.057	0.848	---	
L-18.-04+	19.27	1.043	0.339	0.111	0.325	3.158	2.589	3.101	2.994	0.331	1.062	0.871	1.10	
L-18.-05	19.26	1.030	0.336	0.110	0.326	2.975	2.473	3.064	2.973	0.327	1.000	0.831	---	
L-18.-06+	19.23	1.007	0.333	0.107	0.331	2.983	2.507	2.999	2.958	0.318	1.001	0.841	0.87	QUESTIONABLE
L-18.-07	19.20	0.986	0.327	0.105	0.332	2.782	2.399	2.943	2.914	0.313	0.932	0.804	---	
L-18.-08+	19.19	0.971	0.323	0.105	0.333	2.793	2.423	2.900	2.885	0.313	0.935	0.811	0.92	
L-18.-09	19.21	0.997	0.331	0.106	0.332	2.825	2.445	2.973	2.944	0.315	0.947	0.820	---	
L-18.-10+	19.18	0.967	0.323	0.105	0.334	2.814	2.449	2.889	2.884	0.313	0.942	0.820	0.90	
L-18.-11	19.15	0.947	0.320	0.102	0.338	2.627	2.294	2.832	2.862	0.304	0.878	0.767	---	
L-18.-12+	19.12	0.922	0.311	0.101	0.337	2.630	2.345	2.762	2.790	0.302	0.878	0.783	0.95	
L-18.-13	19.06	0.870	0.298	0.100	0.343	2.357	2.135	2.615	2.696	0.300	0.784	0.710	---	
L-18.-14+	19.02	0.835	0.289	0.097	0.346	2.354	2.118	2.515	2.623	0.291	0.781	0.703	1.20	
L-18.-15	18.99	0.812	0.282	0.095	0.347	2.140	1.935	2.451	2.563	0.286	0.709	0.641	---	
L-18.-16+	18.94	0.770	0.270	0.093	0.351	2.139	1.967	2.331	2.473	0.280	0.707	0.650	1.27	
L-18.-17	18.92	0.758	0.266	0.092	0.351	1.949	1.808	2.296	2.439	0.279	0.649	0.597	---	
L-18.-18+	18.88	0.722	0.254	0.092	0.351	1.849	1.843	2.191	2.336	0.278	0.642	0.607	1.68	
L-18.-19	18.87	0.711	0.251	0.091	0.352	1.806	1.780	2.159	2.310	0.277	0.595	0.586	---	
L-18.-20+	18.84	0.687	0.241	0.090	0.350	1.809	1.752	2.090	2.226	0.275	0.595	0.576	1.82	
L-18.-21	18.84	0.685	0.240	0.090	0.350	1.680	1.608	2.083	2.216	0.274	0.552	0.529	---	
L-18.-22+	18.80	0.657	0.230	0.090	0.350	1.681	1.642	2.003	2.139	0.274	0.552	0.539	2.22	
L-18.-23	18.79	0.646	0.226	0.090	0.350	1.538	1.500	1.969	2.104	0.273	0.504	0.492	---	
L-18.-24+	18.75	0.613	0.215	0.088	0.351	1.534	1.497	1.873	2.008	0.270	0.502	0.490	2.70	
L-18.-25	18.76	0.624	0.218	0.088	0.350	1.420	1.384	1.905	2.034	0.270	0.465	0.453	3.90	
L-18.-26+	18.70	0.572	0.200	0.085	0.350	1.465	1.429	1.751	1.878	0.261	0.478	0.466	---	QUESTIONABLE

UNLESS OTHERWISE INDICATED, ALL DATA ARE FOR:

1. SUPERCAVITATING FLOW.
2. BOTH STATIC PRESSURE TAPS OPEN.

LEGEND

- \* ONLY UPSTREAM STATIC PRESSURE TAP UTILIZED
- \* ONLY DNSTRAM STATIC PRESSURE TAP UTILIZED

PC PARTIALLY CAVITATING

PC (TW) PARTIALLY CAVITATING (TAP WETTED)

PW FULLY WETTED

AT (ALPHAT) (TRUE) ANGLE OF ATTACK, CORRECTED FOR EFFECTS OF IMAGES OF TRAILING VORTICES

AT2 ALPHAT\*2

SIGC CAVITATION NUMBER COMPUTED WITH MEASURED CAVITY PRESSURE

SIGV CAVITATION NUMBER COMPUTED WITH CALCULATED VAPOR PRESSURE

CD DRAG COEFFICIENT, CORRECTED FOR EFFECTS OF IMAGES OF TRAILING VORTICES

(D/L) CORRECTED DRAG-TO-LIFT RATIO = CD/CL

CAVLTH CAVITY LENGTH MEASURED FROM MIDCHORD AT CENTROID POSITION, NONDIMENSIONALIZED ON MEAN CHORD (OBTAINED FROM PHOTOGRAPHS)



EXPER INVES OF WALL EFFECTS ON SUPERCAVITATING HYDROFOILS OF FINITE SPAN

HYDROFOIL INPUT DATA

TR TT AREA SPAN MAC  
76 82 90.0 15.0 6.03

ZERO READINGS AND TUNNEL TEMP BEFORE AND AFTER

HANOM 1-N 1-R 2-N 2-R 3-N 3-R TT  
0. 0.0 0.0 0.0 100.0 0.0 100.0 81.0  
0. 0.0 0.0 0.0 102.0 0.0 105.0 83.0  
CELL LPS/CT (NORMAL/REV) #1=0.20000 #2=0.20000 #3=0.00030  
TWIST= 7200.0 SHAFT DIA.= 1.50IN

\*\*INPUT DATA WAS RECORDED\*\*

RUN NO	HANOM	S	#1	S	#2	S	#3	PINF	PCAV
L-21--01	957.		-1760.0	R	168.5	R	3445.0	278.	91.
L-21--02+	959.		-1740.0	R	167.3	R	3415.0	278.	88.
L-21--03	966.		-1730.0	R	166.5	R	3405.0	262.	85.
L-21--04+	967.		-1712.0	R	165.2	R	3370.0	261.	77.
L-21--05	971.		-1676.0	R	164.6	R	3335.0	243.	69.
L-21--06+	973.		-1632.0	R	163.5	R	3295.0	243.	63.
L-21--07	972.		-1592.0	R	162.5	R	3250.0	224.	59.
L-21--08+	972.		-1540.0	R	160.6	R	3185.0	224.	56.
L-21--09	974.		-1530.0	R	160.2	R	3155.0	211.	48.
L-21--10+	974.		-1488.0	R	159.5	R	3105.0	202.	48.
L-21--11	978.		-1482.0	R	160.0	R	3100.0	202.	44.
L-21--12+	978.		-1442.0	R	159.6	R	3035.0	202.	44.
L-21--13	980.		-1428.0	R	158.9	R	3005.0	189.	43.
L-21--14+	979.		-1374.0	R	158.2	R	2930.0	190.	40.
L-21--15	983.		-1360.0	R	158.1	R	2910.0	180.	39.
L-21--16+	983.		-1308.0	R	158.0	R	2815.0	180.	37.
L-21--17	986.		-1300.0	R	157.8	R	2790.0	169.	36.
L-21--18+	982.		-1250.0	R	158.1	R	2695.0	169.	32.
L-21--19	982.		-1250.0	R	158.2	R	2685.0	159.	31.
L-21--20+	982.		-1188.0	R	158.0	R	2585.0	159.	31.
L-21--21	987.		-1194.0	R	158.1	R	2580.0	148.	31.
L-21--22+	985.		-1114.0	R	156.3	R	2430.0	149.	31.
L-21--23	750.		-1056.0	R	147.0	R	2270.0	149.	31.
L-21--24+	752.		-1014.0	R	146.8	R	2200.0	148.	31.

LOAD CELL #1 LIFT (COUNTS) #2 MOMENT ABOUT MIDCHORD (COUNTS)  
#3 DRAG (COUNTS)  
PINF STATIC PRESSURE (MM HG)  
PCAV CAVITY PRESSURE (MM HG)  
RUN NO Q-XXI-YY: Q=FOIL TESTED(S=SMALL,M=MED,L=LARGE)  
XX=GEOMETRIC ATTACK ANGLE (DEGREES)  
YY=RUN NUMBER, THIS FOIL @ THIS ANGLE

LEGEND TR ROOM TEMPER (DEG FAHR)  
TT TUNNEL " ( " )  
AREA HALF-SPAN MODEL PLANFORM AREA (SQ IN)  
SPAN FOIL HALF-SPAN (IN)  
MAC MEAN CHORD, MEAS. @ MODEL CENTROID(IN)  
HANOM VELOCITY MANOMETER READING (MM)  
TWIST SHAFT TWIST (DEGREES/IN-LB)  
S LOAD CELL POLARITY(N=NORMAL,R=REVERSE)



EXPER INVES OF WALL EFFECTS ON SUPERCAVITATING HYDROPOILS OF FINITE SPAN

INPUT DATA CORRECTED FOR ZERO READINGS, SIGNS, AND HYDROSTATIC PRESSURE

RUN NO	HANON	#1	#2	#3	PINP	PCAV
L-21.-01	957.	-1760.0	-68.5	-3345.0	271.	91.
L-21.-02	959.	-1740.0	-67.2	-3314.8	271.	88.
L-21.-03	966.	-1730.0	-66.3	-3304.6	255.	85.
L-21.-04	967.	-1712.0	-64.9	-3269.3	254.	77.
L-21.-05	971.	-1676.0	-64.3	-3234.1	236.	69.
L-21.-06	973.	-1632.0	-63.1	-3193.9	236.	63.
L-21.-07	972.	-1592.0	-62.0	-3148.7	217.	59.
L-21.-08	972.	-1540.0	-60.0	-3083.5	217.	56.
L-21.-09	974.	-1530.0	-59.5	-3053.3	204.	48.
L-21.-10	974.	-1488.0	-58.7	-3003.0	204.	48.
L-21.-11	978.	-1482.0	-59.1	-2997.8	195.	48.
L-21.-12	978.	-1442.0	-58.6	-2932.6	195.	44.
L-21.-13	980.	-1428.0	-57.9	-2902.4	182.	43.
L-21.-14	979.	-1374.0	-57.1	-2827.2	183.	40.
L-21.-15	983.	-1360.0	-56.9	-2807.0	173.	39.
L-21.-16	983.	-1308.0	-56.7	-2711.7	173.	37.
L-21.-17	986.	-1300.0	-56.4	-2686.5	162.	36.
L-21.-18	982.	-1250.0	-56.6	-2591.3	162.	32.
L-21.-19	982.	-1250.0	-56.6	-2581.1	152.	31.
L-21.-20	982.	-1188.0	-56.3	-2480.9	152.	31.
L-21.-21	987.	-1194.0	-56.4	-2475.7	141.	31.
L-21.-22	985.	-1114.0	-54.5	-2325.4	142.	31.
L-21.-23	750.	-1056.0	-45.1	-2165.2	142.	31.
L-21.-24	752.	-1014.0	-44.8	-2095.0	141.	31.



EXPERIMENTS OF WALL EFFECTS ON SUPERCAVITATING HYDROFOILS OF FINITE SPAN

\*\*HYDROFOIL DATA REDUCTION\*\*

RUN NO	ALPHA	LIFT-LB	DRAG-LB	MOM-INLB	VEL-FPS
L-21-01	21.03	365.70	134.80	246.60	23.20
L-21-02	21.03	361.44	133.59	241.97	23.22
L-21-03	21.03	359.26	133.17	238.77	23.30
L-21-04	21.03	355.39	131.75	233.78	23.31
L-21-05	21.03	348.05	130.34	231.31	23.35
L-21-06	21.03	339.01	128.71	227.03	23.37
L-21-07	21.03	330.80	126.89	223.12	23.36
L-21-08	21.03	320.00	124.26	215.97	23.36
L-21-09	21.03	317.90	123.05	214.22	23.39
L-21-10	21.03	309.34	121.02	211.38	23.39
L-21-11	21.03	308.23	120.81	212.87	23.43
L-21-12	21.03	300.13	118.18	211.12	23.43
L-21-13	21.03	257.17	116.97	208.28	23.45
L-21-14	21.03	266.21	113.94	205.45	23.44
L-21-15	21.03	283.38	113.12	204.78	23.49
L-21-16	21.03	272.94	109.28	204.10	23.49
L-21-17	21.03	271.28	108.27	203.07	23.52
L-21-18	21.03	261.32	104.43	203.84	23.48
L-21-19	21.03	261.33	104.02	203.89	23.48
L-21-20	21.03	248.87	99.98	202.85	23.48
L-21-21	21.03	250.07	99.77	202.90	23.53
L-21-22	21.03	233.69	93.72	196.11	23.51
L-21-23	21.02	220.22	87.26	162.31	20.71
L-21-24	21.02	211.76	84.43	161.28	20.73

LEGEND VEL UPSTREAM VELOCITY (U)





ZIPER INVES OF WALL EFFECTS ON SUPERCavitating HYDROFOILS OF FINITE SPAN

••HYDROFOIL DATA IN NONDIMENSIONAL FORM (NO CORRECTIONS APPLIED)••

RUN NO	ALPHA	CL	CDUNC	CM	L/D	D/L	RM*10**-6
L-21.-01	21.03	1.1244	0.4099	0.1257	2.7435	0.3545	1.2848
L-21.-02	21.03	1.1092	0.4053	0.1231	2.7366	0.3554	1.2861
L-21.-03	21.03	1.0950	0.4013	0.1207	2.7288	0.3665	1.2904
L-21.-04	21.03	1.0822	0.3966	0.1181	2.7288	0.3665	1.2911
L-21.-05	21.03	1.0558	0.3907	0.1164	2.7020	0.3701	1.2935
L-21.-06	21.03	1.0264	0.3851	0.1140	2.6655	0.3752	1.2948
L-21.-07	21.03	1.0025	0.3799	0.1121	2.6386	0.3790	1.2942
L-21.-08	21.03	0.9698	0.3720	0.1085	2.6072	0.3836	1.2942
L-21.-09	21.03	0.9616	0.3676	0.1075	2.6161	0.3823	1.2954
L-21.-10	21.03	0.9357	0.3614	0.1060	2.5888	0.3863	1.2954
L-21.-11	21.03	0.9288	0.3594	0.1064	2.5841	0.3870	1.2979
L-21.-12	21.03	0.9044	0.3515	0.1055	2.5729	0.3387	1.2979
L-21.-13	21.03	0.8937	0.3472	0.1039	2.5745	0.3884	1.2991
L-21.-14	21.03	0.8616	0.3384	0.1026	2.5464	0.3927	1.2985
L-21.-15	21.03	0.8498	0.3231	0.1018	2.5397	0.3938	1.3010
L-21.-16	21.03	0.8185	0.3231	0.1015	2.5333	0.3947	1.3010
L-21.-17	21.03	0.8113	0.3191	0.1007	2.5419	0.3934	1.3028
L-21.-18	21.03	0.7844	0.3089	0.1015	2.5398	0.3937	1.3003
L-21.-19	21.03	0.7844	0.3076	0.1015	2.5501	0.3921	1.3003
L-21.-20	21.03	0.7471	0.2955	0.1010	2.5281	0.3955	1.3003
L-21.-21	21.03	0.7471	0.2935	0.1005	2.5460	0.3928	1.3034
L-21.-22	21.03	0.6995	0.2759	0.0973	2.5354	0.3944	1.3022
L-21.-23	21.02	0.8495	0.3319	0.1038	2.5595	0.3907	1.1471
L-21.-24	21.02	0.8148	0.3202	0.1029	2.5450	0.3929	1.1485

LEGEND

ALPHA GEOMETRIC ANGLE OF ATTACK CORRECTED FOR SHAFT TWIST

CL LIFT COEFFICIENT, NONDIMENSIONALIZED ON UPSTREAM VELOCITY AND MODEL PLANFORM AREA

CDUNC CD(CORRECTED), THE UNCORRECTED DRAG COEFFICIENT AS COMPUTED FROM MEASURED DRAG, AND NONDIMENSIONALIZED

ON UPSTREAM VELOCITY AND MODEL PLANFORM AREA

CM MOMENT COEFFICIENT, NONDIMENSIONALIZED ON UPSTREAM VELOCITY, MODEL PLANFORM AREA, AND MEAN CHORD

L/D LIFT-TO-DRAG RATIO = CL/CDUNC

D/L DRAG-TO-LIFT RATIO = CDUNC/CL

RM REYNOLDS NUMBER, BASED ON MEAN CHORD



EXPER INVES OF WALL EFFECTS ON SUPERCAVITATING HYDROPOILS OF FINITE SPAN

♦♦PRIOR DATA CORRECTED FOR EFFECTS OF IMAGES OF TRAILING VORTEX SYSTEM♦♦

RUN NO	ALPHAT	CL	CD	CM	(D/L)	SIGV/AT	SIGC/AT	CL/AT	CD/AT2	CH/AT	SIGV	SIGC	CAVLTH	COMMENTS/REMARKS
L-21.-01	22.37	1.124	0.436	0.126	0.388	3.347	2.471	2.880	2.861	0.322	1.307	0.965	---	
L-21.-02+	22.35	1.109	0.431	0.123	0.388	3.342	2.509	2.844	2.831	0.316	1.304	0.979	1.22	
L-21.-03	22.33	1.095	0.426	0.121	0.389	3.104	2.317	2.810	2.805	0.310	1.210	0.903	---	
L-21.-04+	22.32	1.082	0.421	0.118	0.389	3.088	2.412	2.778	2.774	0.303	1.203	0.939	1.28	
L-21.-05	22.28	1.056	0.414	0.116	0.392	2.835	2.270	2.715	2.716	0.299	1.103	0.883	---	
L-21.-06+	22.25	1.026	0.407	0.114	0.396	2.833	2.351	2.643	2.698	0.294	1.100	0.913	1.30	
L-21.-07	22.22	1.002	0.401	0.112	0.400	2.580	2.152	2.585	2.664	0.289	1.001	0.835	---	
L-21.-08+	22.18	0.970	0.391	0.109	0.404	2.584	2.197	2.505	2.612	0.280	1.000	0.851	1.50	
L-21.-09	22.17	0.962	0.387	0.107	0.402	2.402	2.126	2.485	2.583	0.278	0.929	0.823	---	
L-21.-10+	22.14	0.936	0.380	0.106	0.406	2.404	2.129	2.542	2.542	0.274	0.929	0.823	1.30	
L-21.-11	22.13	0.929	0.377	0.106	0.406	2.273	1.999	2.404	2.529	0.275	0.878	0.772	---	
L-21.-12+	22.10	0.904	0.368	0.105	0.407	2.275	2.056	2.344	2.476	0.273	0.877	0.793	1.25	
L-21.-13	22.09	0.894	0.364	0.104	0.407	2.094	1.891	2.318	2.447	0.269	0.807	0.729	---	
L-21.-14+	22.05	0.862	0.354	0.103	0.411	2.112	1.950	2.239	2.388	0.267	0.813	0.751	1.30	
L-21.-15	22.04	0.850	0.350	0.102	0.411	1.969	1.822	2.210	2.363	0.265	0.757	0.701	---	
L-21.-16+	22.00	0.819	0.337	0.102	0.412	1.971	1.852	2.132	2.286	0.264	0.757	0.711	1.55	
L-21.-17	21.99	0.811	0.333	0.101	0.410	1.816	1.712	2.114	2.259	0.262	0.697	0.657	---	
L-21.-18+	21.96	0.784	0.322	0.101	0.410	1.825	1.776	2.047	2.189	0.265	0.699	0.680	1.65	
L-21.-19	21.96	0.784	0.320	0.101	0.408	1.687	1.653	2.047	2.181	0.265	0.647	0.633	---	
L-21.-20+	21.91	0.747	0.307	0.101	0.411	1.689	1.656	1.953	2.099	0.264	0.646	0.633	1.80	
L-21.-21	21.91	0.747	0.305	0.101	0.408	1.531	1.499	1.953	2.085	0.263	0.586	0.573	---	
L-21.-22+	21.86	0.700	0.286	0.097	0.409	1.550	1.519	1.834	1.965	0.255	0.591	0.580	3.15	
L-21.-23	22.03	0.649	0.347	0.104	0.408	1.981	1.943	2.209	2.346	0.270	0.762	0.747	---	
L-21.-24+	21.99	0.815	0.334	0.103	0.410	1.961	1.924	2.123	2.267	0.268	0.752	0.738	1.50	

UNLESS OTHERWISE INDICATED, ALL DATA ARE FOR:

1. SUPERCAVITATING FLOW.
2. BOTH STATIC PRESSURE TAPS OPEN.

LEGEND

- ♦ ONLY UPSTREAM STATIC PRESSURE TAP UTILIZED
- \* ONLY DNSTREAM STATIC PRESSURE TAP UTILIZED

PC PARTIALLY CAVITATING

PC(TW) PARTIALLY CAVITATING (TAP WETTED)

FW FULLY WETTED

AT (ALPHAT) (TRUE) ANGLE OF ATTACK, CORRECTED FOR EFFECTS OF IMAGES OF TRAILING VORTICES

AT2 ALPHAT\*\*2

SIGC CAVITATION NUMBER COMPUTED WITH MEASURED CAVITY PRESSURE

SIGV CAVITATION NUMBER COMPUTED WITH CALCULATED VAPOR PRESSURE

CD DRAG COEFFICIENT, CORRECTED FOR EFFECTS OF IMAGES OF TRAILING VORTICES

(D/L) CORRECTED DRAG-TO-LIFT RATIO = CD/CL

CAVLTH CAVITY LENGTH MEASURED FROM MIDCHORD AT CENTROID POSITION, NONDIMENSIONALIZED ON MEAN CHORD (OBTAINED FROM PHOTOGRAPHS)



Thesis  
M27727

Maixner

172287

An experimental  
investigation of wall  
effects on supercav-  
itating hydrofoils of  
finit span.

Thesis  
M27727

Maixner

172287

An experimental  
investigation of wall  
effects on supercav-  
itating hydrofoils of  
finit span.

thesM27727

An experimental investigation of wall ef



3 2768 002 04208 7

DUDLEY KNOX LIBRARY